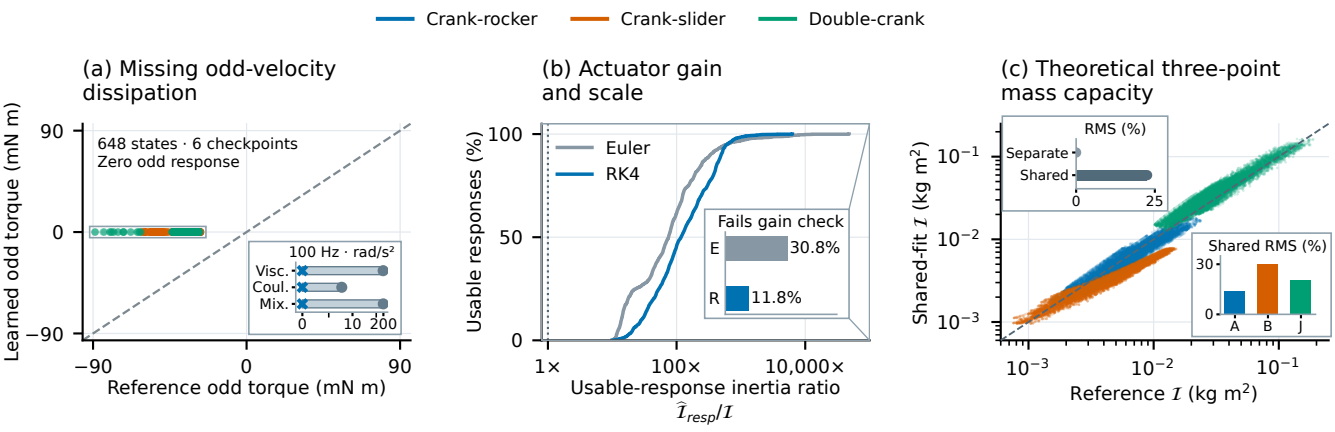

Crank-rocker
Crank-slider
Double-crank
(a) Missing odd-velocity dissipation
648 states · 6 checkpoints
Zero odd response
100 Hz · rad/s²
Visc.
Coul.
Mix.
0
10
200
Learned odd torque (mN m)
Reference odd torque (mN m)
90
0
−90
(b) Actuator gain and scale
Euler
RK4
Fails gain check
E
30.8%
R
11.8%
Usable responses (%)
100
50
0
1×
100×
10,000×
Usable-response inertia ratio
$\widehat{\mathcal{I}}_{resp}/\mathcal{I}$
(c) Theoretical three-point mass capacity
RMS (%)
Separate
Shared
0
25
Shared RMS (%)
30
0
A
B
J
Shared-fit $\mathcal{I}$ (kg m²)
Reference $\mathcal{I}$ (kg m²)
10^{-1}
10^{-2}
10^{-3}