
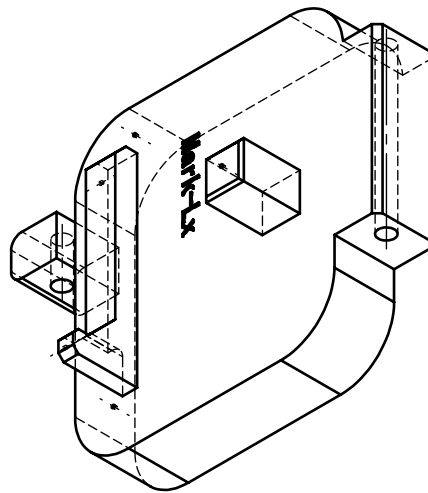
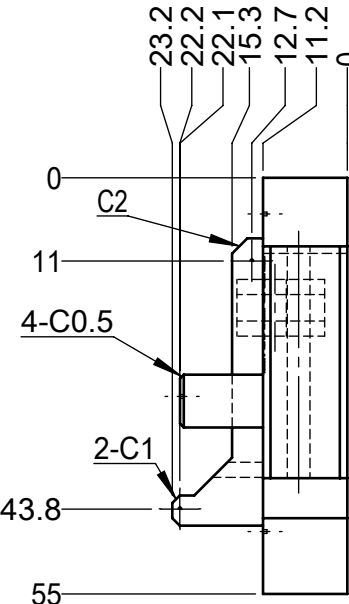


Refer to protection notice ISO 16016
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment damages. All rights reserved in the event of the grant of a patent, utility model or design.

参照ISO 16016保护条例
本图纸未经许可不得复制或传播，不允许擅自与他人交流其内容。违者必究，并须赔偿损失。保留发明，实用新型以及外观设计专利的所有权。

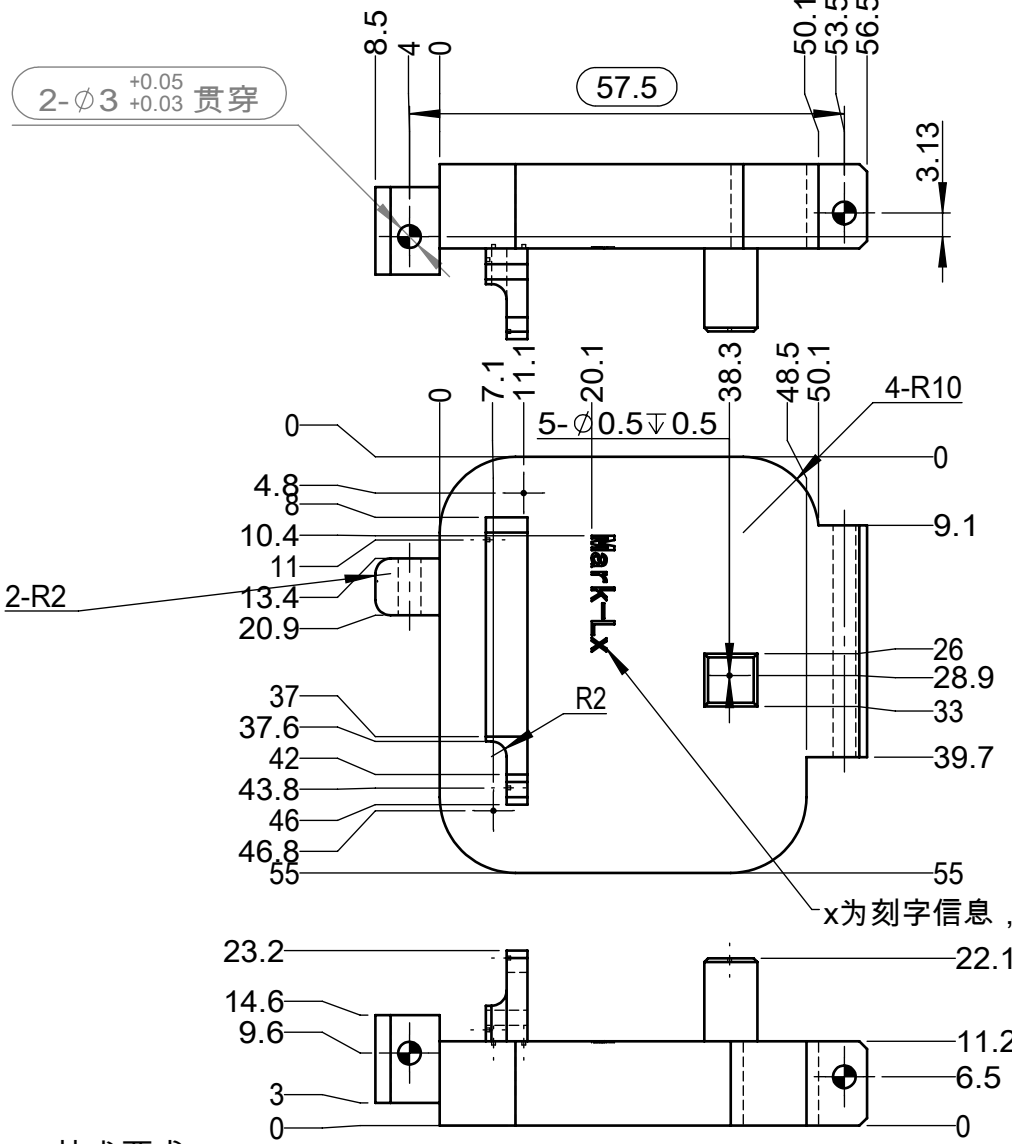

技术要求

- 1.未注线性公差按缺省公差。
- 2.锐边及孔口倒角C0.2。
- 3.无热处理，所有尺寸均为最后尺寸。
- 4.表面不可划伤变形。
- 5.提供STP/DWG文档，未注尺寸按3D/CAD为准。
- 6.未注表面粗糙度均按3.2/

Mark-Lx B

01		设变内容/Modification contents						签名/Sign	日期/Date
标记/Mark	缺省公差mm Tolerance unless spcified	设计 Design	孙勇	材质 Material	SUS316L		博众精工科技股份有限公司 BOZHON Precision Industry Technology Co.,Ltd.		
>0.5-3	±0.05	绘图 Drawn	孙勇	重量 Weight	0.268 Kg		机名 Model	MMS-L XA0.101	
>3-6	±0.05	审核 Check		比例 Scale	版本 Rev.	图幅 Size	页码 Page	图名 Title	03-23 左产品仿形2
>6-30	±0.1	批准 Approved		1:1	B	A4	1/1	图号 Dwg No.	1010018030293-03-23
>30-120	±0.15			表面处理 Surface finish					
>120-400	±0.2			无表面处理					
>400-1000	±0.3								
>1000	±0.5								