ASSIGNMENT - 4

Assignment Date	31/10/2022
Student Name	ARUNPRIYA P
Student Rollnumber	422419104008
Maximum Mark	2 Mark

QUESTION 1;

Write code and connections in work for ultrasonic sensor. Whenever distance is less than 100cms send"alert" to ibm cloud and display in device recent events.

CODE:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-------credentials of IBM Accounts------

#define ORG "4hn0jp"//IBM ORGANITION ID
#define DEVICE_TYPE "ULTRASON"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "DISTANCEDETECT"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "wuo5s7PR)ZSegVk&Rx"//Token
String data3;
float dist;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd  REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
Serial.begin(115200);
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
pinMode(trig,OUTPUT);
pinMode(echo,INPUT);
pinMode(LED, OUTPUT);
delay(10);
wificonnect();
mqttconnect();
}
void loop()// Recursive Function
{

 digitalWrite(trig,LOW);
  digitalWrite(trig,HIGH);
  delayMicroseconds(10);
  digitalWrite(trig,LOW);
  float dur = pulseIn(echo,HIGH);
  float dist = (dur * 0.0343)/2;
  Serial.print ("Distancein cm");
  Serial.println(dist);


  PublishData(dist);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}



/*.....................................retrieving to Cloud.............................*/

void PublishData(float dist) {
  mqttconnect();//function call for connecting to ibm
  /*
     creating the String in in form JSon to update the data to ibm cloud
```

```
   creating the String in in form JSon to update the data to ibm cloud
*/
String object;
if (dist <100)
{
  digitalWrite(LED,HIGH);
  Serial.println("object is near");
  object = "Near";
}
else
{
  digitalWrite(LED,LOW);
  Serial.println("no object found");
  object = "No";
}

String payload = "{\"distance\":";
payload += dist;
payload += "," "\"object\":\"";
payload += object;
payload += "\"}";


Serial.print("Sending payload: ");
Serial.println(payload);
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
98
99    if (client.publish(publishTopic, (char*) payload.c_str())) {
100     Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101   } else {
102     Serial.println("Publish failed");
103   }
104
105 }
106 void mqttconnect() {
107   if (!client.connected()) {
108     Serial.print("Reconnecting client to ");
109     Serial.println(server);
110     while (!!!client.connect(clientId, authMethod, token)) {
111       Serial.print(".");
112       delay(500);
113     }
114
115     initManagedDevice();
116     Serial.println();
117   }
118 }
119 void wificonnect() //function defination for wificonnect
120 {
121   Serial.println();
122   Serial.print("Connecting to ");
123
124   WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126     delay(500);
127     Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
123
124     WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125     while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128     }
129     Serial.println("");
130     Serial.println("WiFi connected");
131     Serial.println("IP address: ");
132     Serial.println(WiFi.localIP());
133   }
134
135   void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137       Serial.println((subscribetopic));
138       Serial.println("subscribe to cmd OK");
139     } else {
140       Serial.println("subscribe to cmd FAILED");
141     }
142   }
143
144   void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145   {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150       //Serial.print((char)payload[i]);
151       data3 += (char)payload[i];
152     }
153
154   //   Serial.println("data: "+ data3);
155   //   if(data3=="Near")
156   //   {
157   // Serial.println(data3);
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
142  }
143
144  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145  {
146
147    Serial.print("callback invoked for topic: ");
148    Serial.println(subscribetopic);
149    for (int i = 0; i < payloadLength; i++) {
150      //Serial.print((char)payload[i]);
151      data3 += (char)payload[i];
152    }
153
154  //   Serial.println("data: "+ data3);
155  //   if(data3=="Near")
156  //   {
157  // Serial.println(data3);
158  // digitalWrite(LED,HIGH);
159
160  //   }
161
162  //   else
163  //   {
164  // Serial.println(data3);
165  // digitalWrite(LED,LOW);
166
167  //   }
168  data3="";
169
170
171  }
```

OUTPUT:

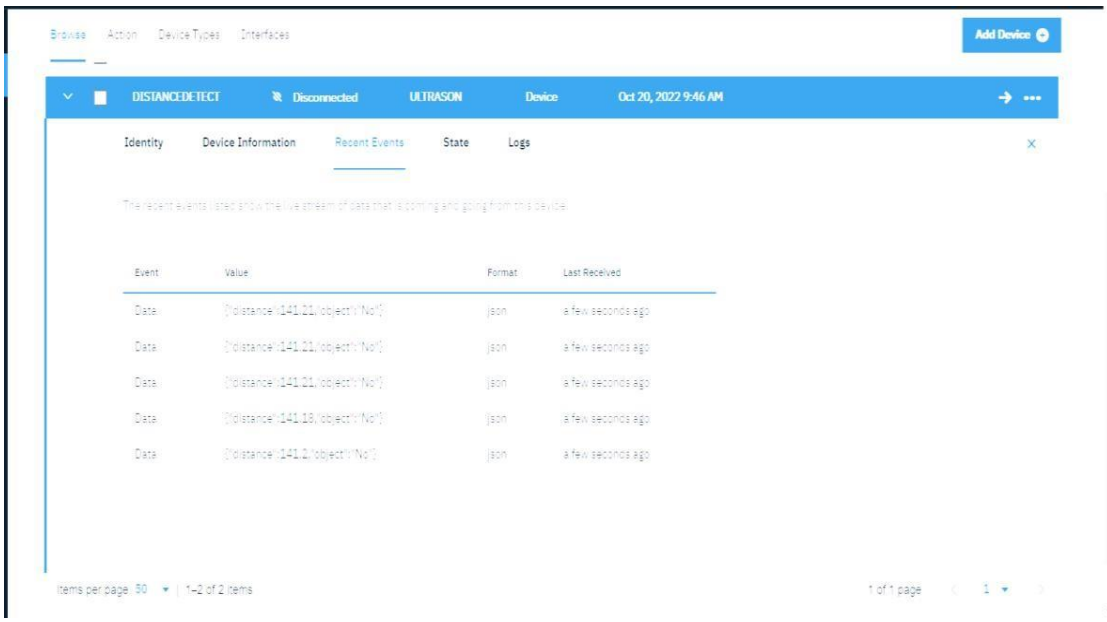
Browse
Action
Device Types
Interfaces
Add Device
DISTANCEDETECT
Disconnected
ULTRASON
Device
Oct 20, 2022 9:46 AM
Identity
Device Information
Recent Events
State
Logs
Event
Value
Format
Last Received
Data
json
a few seconds ago
Data
json
a few seconds ago
Data
json
a few seconds ago
Data
json
a few seconds ago
Data
json
a few seconds ago
Items per page: 50
1–2 of 2 items
1 of 1 page
1

DATA SEND TO THE IBM CLOUD DEVICE WHEN THE OBJECT NEAR:

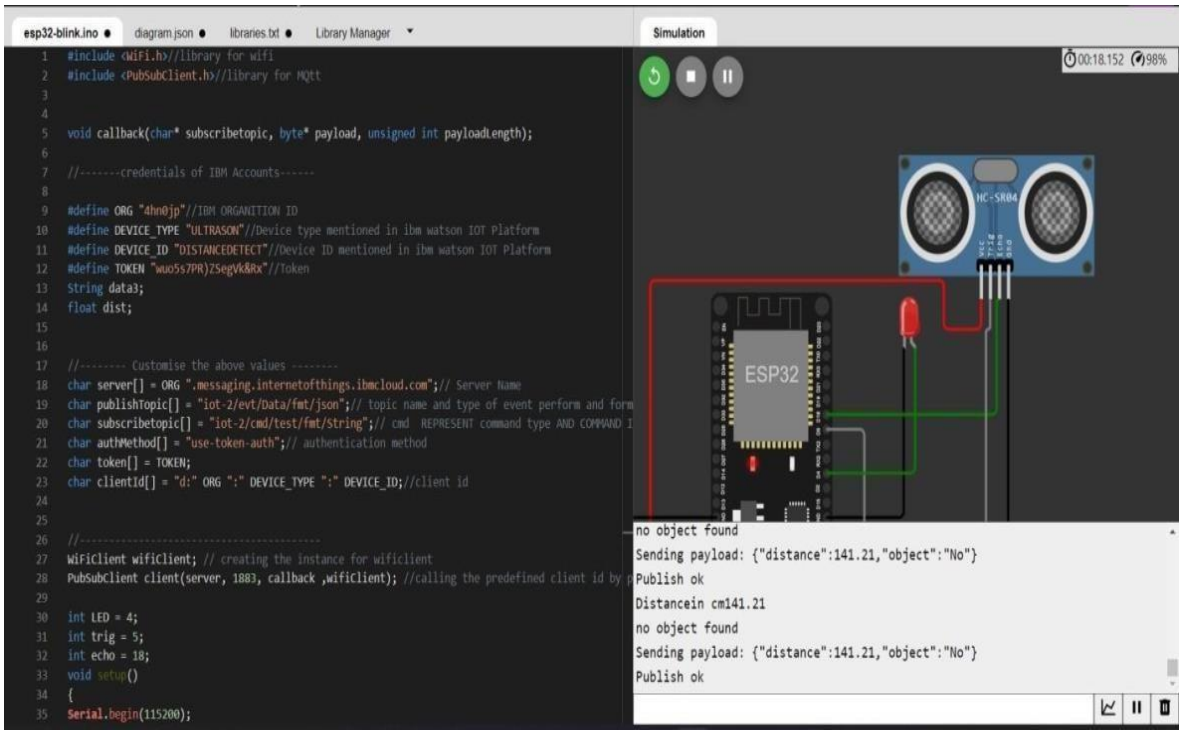


```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-------credentials of IBM Accounts------

#define ORG "4hn0jp"//IBM ORGANITION ID
#define DEVICE_TYPE "ULTRASON"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "DISTANCEDETECT"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "wuo5s7PR)ZSegVk&Rx"//Token
String data3;
float dist;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and form
char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd  REPRESENT command type AND COMMAND I
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by p

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
Serial.begin(115200);
```

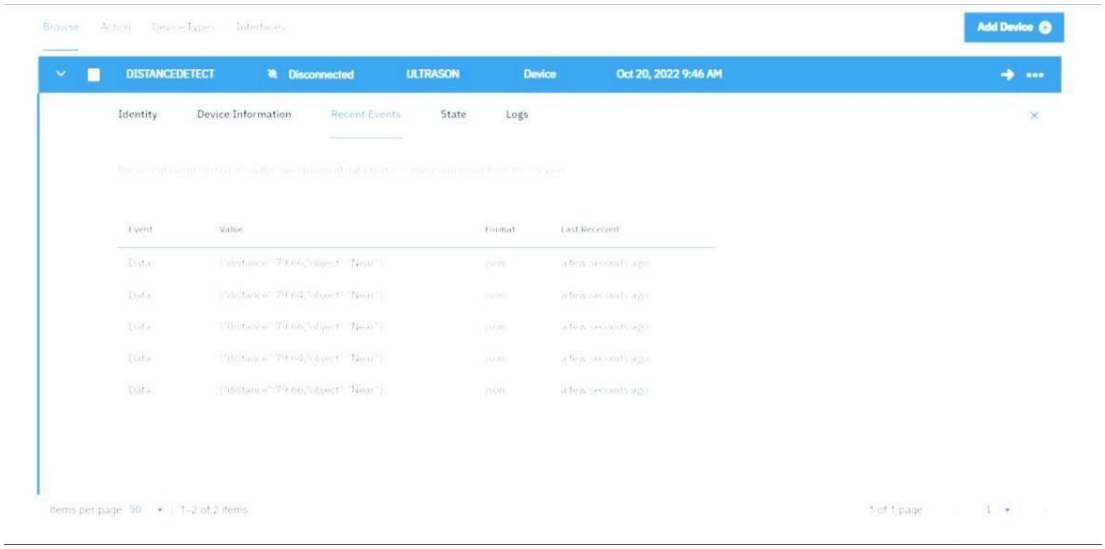

WHEN THE OBJECT NEAR TO THE ULTRASONIC SENSOR: