Problem Statement :

IoT-Based specific intelligent fire management system.

Domain :

Internet of Things

Assignment 1 :

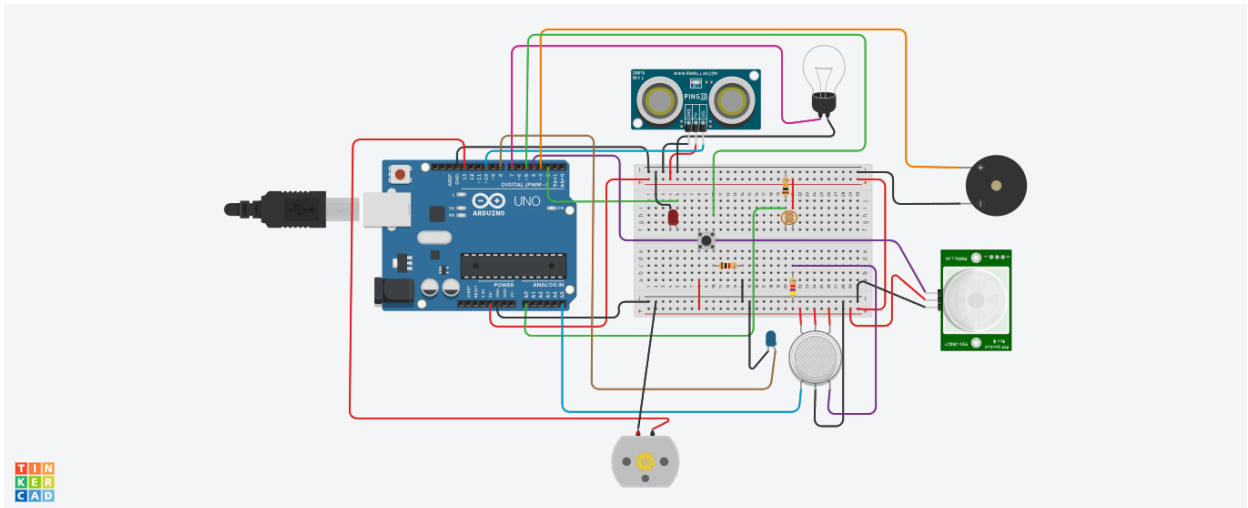Smart home with at least two sensors and led, buzzer in TinkerCad

By,

Kakunooru nanda kamal reddy-720819106047

Link :

https://www.tinkercad.com/things/6k2FfP5I8fW-brave-migelo-amberis/editel?sharecode=KzPJ_TiBU
8pThZpIoEd_nCUQhJjzx_X8DEbwvb1-ZLM

Circuit diagram :

Arduino Uno Code :

```
const int pingPin = 10;

const int ledUS = 2;

const int light = 7;

const int pir = 4;

#define photoSensor A0

#define buzzer 3

int const PINO_SGAS = A5;

int const ledGas = 8;

int const button = 5;

int const motor = 13;

void setup()

{

  pinMode(ledUS, OUTPUT);

  pinMode(light, OUTPUT);

  pinMode(buzzer, OUTPUT);

  pinMode(ledGas, OUTPUT);

  pinMode(motor, OUTPUT);

  pinMode(pir, INPUT);
```

```
  pinMode(button, INPUT);

  pinMode(photoSensor, INPUT);

  Serial.begin(9600);

}

void loop()

{

  long duration, cm;

  int valLight = analogRead(photoSensor);

  int valPIR= digitalRead(pir);

  int valGAS = analogRead(PINO_SGAS);

  valGAS = map(valGAS, 300, 750, 0, 100);

  int valBt = digitalRead(button);

  pinMode(pingPin, OUTPUT);

  digitalWrite(pingPin, LOW);

  delayMicroseconds(2);

  digitalWrite(pingPin, HIGH);

  delayMicroseconds(5);

  digitalWrite(pingPin, LOW);

  pinMode(pingPin, INPUT);

  duration = pulseIn(pingPin, HIGH);

  cm = microsecondsToCentimeters(duration);

  if(cm < 336){

    digitalWrite(ledUS, HIGH);

  }else{

    digitalWrite(ledUS, LOW);

  }

  if(valLight < 890){

    digitalWrite(light, HIGH);

  }else{
```

```arduino
    digitalWrite(light, LOW);
  }
  if(valPIR == 1){
    digitalWrite(buzzer, HIGH);
  }else{
    digitalWrite(buzzer, LOW);
  }
  if(valBt == 1){
    digitalWrite(motor, HIGH);
  }else{
    digitalWrite(motor, LOW);
  }
  if(valGAS > 20){
    digitalWrite(ledGas, HIGH);
  }else{
    digitalWrite(ledGas, LOW);
  }
  Serial.print(valPIR);
  Serial.println();
}
long microsecondsToCentimeters(long microseconds) {
  return microseconds / 29 / 2;
}
```