PROBLEM STATEMENT:

IOT BASED SMART CROP PROTECTION SYSTEM FOR AGRICULTURE

DOMAIN:

INTERNET OF THINGS

ASSIGNMENT 4:

DISTANCE DETECTION USING ULTRASONIC SENSOR

BY

MULLAIYARASI . K - 623519106013

PREMALATHA .V - 623519106032

SARASWATHI . K -623519106015

SRINITHI . B -623519106022

QUESTION-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cmssend "alert" to IBM cloud and display in device recent events.

WOKWI LINK:

https://wokwi.com/projects/347931268501996116

CODE ;

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "i4ai77"
```

```
#define DEVICE_TYPE "Ultrasonic"
#define DEVICE_ID "Premalatha"
#define TOKEN "9384931945"

#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/manimd/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);



const int trigpin=5;
const int echopin=18;
String command;
String data="";

long duration;
float dist;



void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop()) {
    mqttConnect();
  }
```

```
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
  if(dist<100){
    String payload = "{\"Alert Distance\":";
    payload += dist;
    payload += "}";
```

```
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  }

}
  if(dist>100){
  String payload = "{\"Distance\":";
  payload += dist;
  payload += "}";

  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
   if(client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  }else {
    Serial.println("Publish FAILED");
  }

}


}
```

OUTPUT:

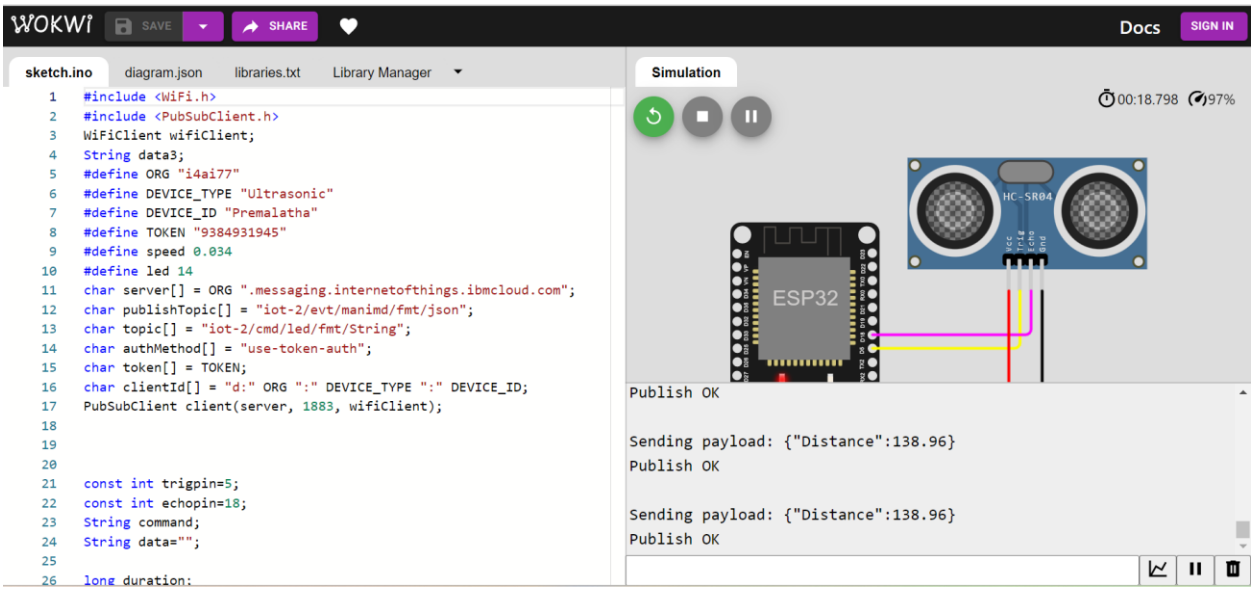


```ino
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "i4ai77"
#define DEVICE_TYPE "Ultrasonic"
#define DEVICE_ID "Premalatha"
#define TOKEN "9384931945"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/manimd/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);



const int trigpin=5;
const int echopin=18;
String command;
String data="";

long duration;
```