

Assignment-4

Distance Detection Using Ultrasonic Sensor

Assignment Date	5 november 2022
Student Name	V.Vamsi
Team ID	PNT2022TMID24432
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

WOKWI LINK : <https://wokwi.com/projects/346518948162830932>

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

#define ORG "f59trs"
#define DEVICE_TYPE "ultrasonicsensor"
#define DEVICE_ID "distancedetection"
#define TOKEN "AlGMGaaF01nawa1QA3"
String data3;
float dist;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
  Serial.begin(115200);
  pinMode(trig,OUTPUT);
```

```

pinMode(echo, INPUT);
pinMode(LED, OUTPUT);
delay(10);
wificonnect();
mqttconnect();
}
void loop()
{
    digitalWrite(trig, LOW);
    digitalWrite(trig, HIGH);
    delayMicroseconds(10);
    digitalWrite(trig, LOW);
    float dur = pulseIn(echo, HIGH);
    float dist = (dur * 0.0343)/2;
    Serial.print("Distance in cm :");
    Serial.println(dist);

    PublishData(dist);
    delay(1000);
    if (!client.loop()) {
        mqttconnect();
    }
}

void PublishData(float dist) {
    mqttconnect();
    String object;
    if (dist < 100)

```

```

if (dist < 100)
{
    digitalWrite(LED, HIGH);
    Serial.println("object is near");
    object = "Near";
}
else
{
    digitalWrite(LED, LOW);
    Serial.println("no object found");
    object = "No";
}

String payload = "{\"distance\": ";
payload += dist;
payload += ", \"object\": \"";
payload += object;
payload += "\"}";

    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");
    } else {
        Serial.println("Publish failed");
    }
}

void mqttconnect() {
    if (!client.connected()) {

```

```

        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void wificonnect()
{
    Serial.println();
    Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

```


```

        Serial.println("subscribe to cmd FAILED");
    }
}


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        data3 += (char)payload[i];
    }
    data3 = "";
}

```

When object is not near to the ultrasonic sensor

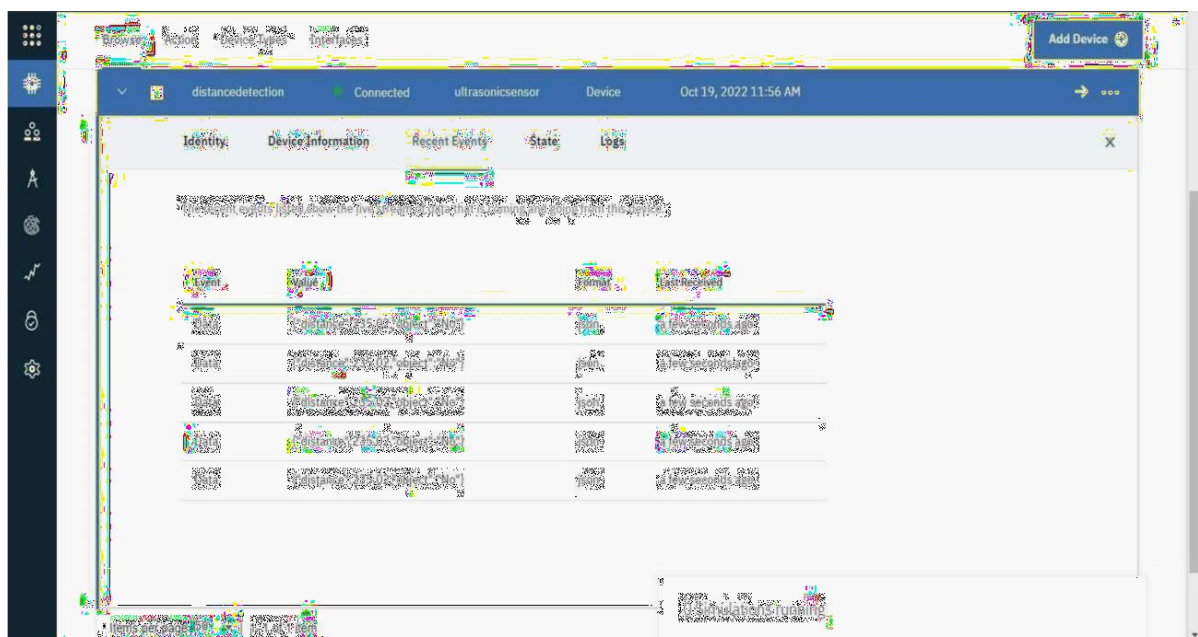

When object is nearer to the ultrasonic sensor

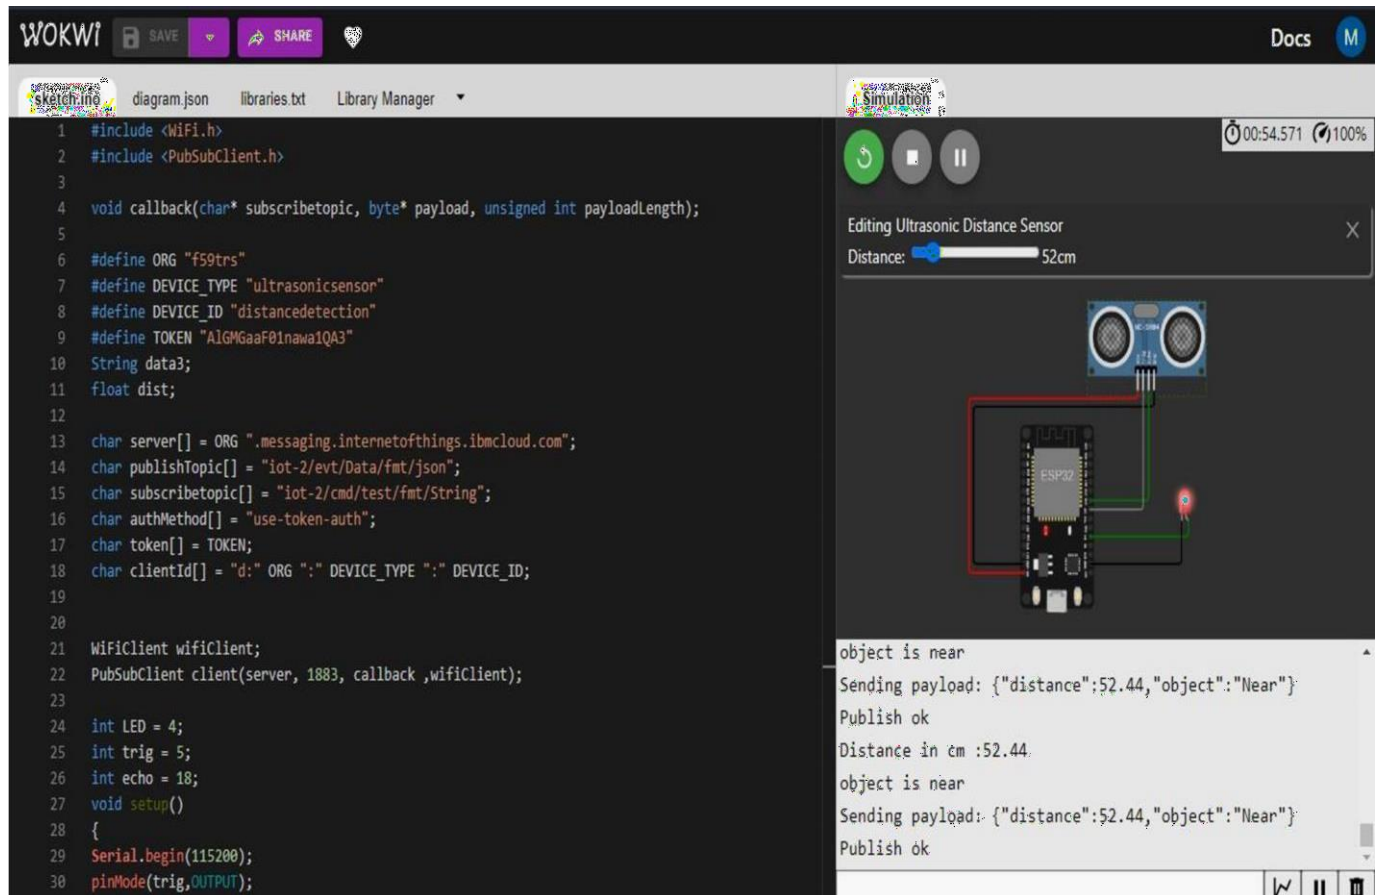


The screenshot shows the Wokwi IDE interface. On the left, the sketch code is displayed, which includes the following key sections:

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3
4 void callback(char* topic, byte* payload, unsigned int payloadLength);
5
6 #define ORG "f59trs"
7 #define DEVICE_TYPE "ultrasonicsensor"
8 #define DEVICE_ID "distancedetection"
9 #define TOKEN "AlGMGaaF0Inawa1QA3"
10 String data3;
11 float dist;
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/Data/fmt/json";
15 char subscribtopic[] = "iot-2/cmd/test/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19
20
21 WiFiClient wifiClient;
22 PubSubClient client(server, 1883, callback, wifiClient);
23
24 int LED = 4;
25 int trig = 5;
26 int echo = 18;
27 void setup()
28 {
29   Serial.begin(115200);
30   pinMode(trig, OUTPUT);
```

On the right, the simulation window shows the "Editing Ultrasonic Distance Sensor" dialog with the distance set to 52cm. Below it, a diagram shows an ESP32 microcontroller connected to an ultrasonic sensor and an LED. The console output shows the following messages:

```
object is near
Sending payload: {"distance":52.44,"object":"Near"}
Publish ok
Distance in cm :52.44
object is near
Sending payload: {"distance":52.44,"object":"Near"}
Publish ok
```

Data sent to the IBM cloud device when the object is near

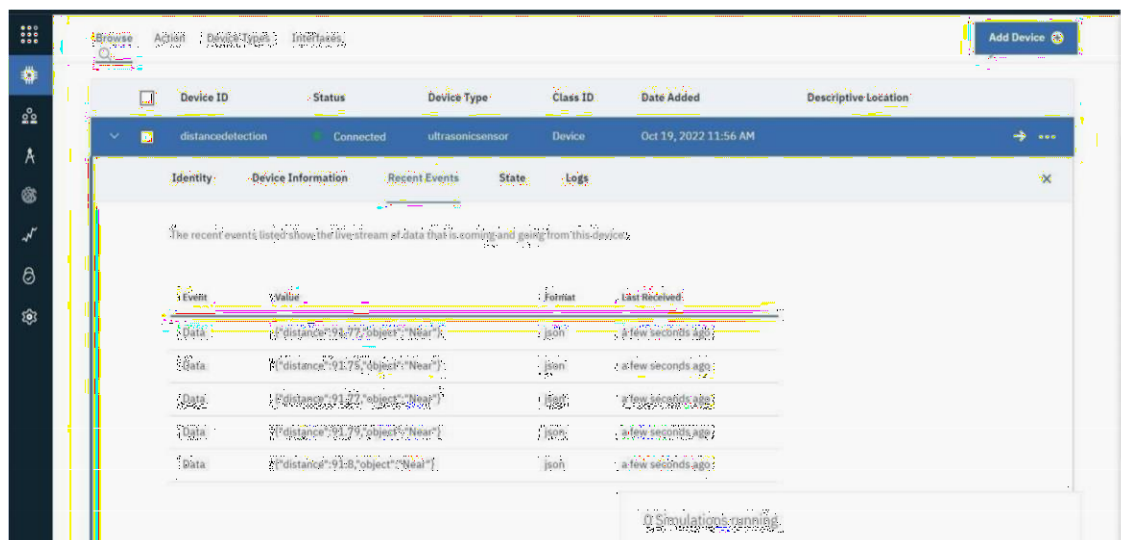

The screenshot shows the IBM Cloud IoT Platform console. The 'Recent Events' tab is selected, displaying a list of events for the device 'distancedetection'. The events are as follows:

Event	Value	Format	Last Received
/Data	{"distance":52.44,"object":"Near"}	json	a few seconds ago
/Data	{"distance":52.44,"object":"Near"}	json	a few seconds ago
/Data	{"distance":52.44,"object":"Near"}	json	a few seconds ago
/Data	{"distance":52.44,"object":"Near"}	json	a few seconds ago