Assignment -4
Python Programming

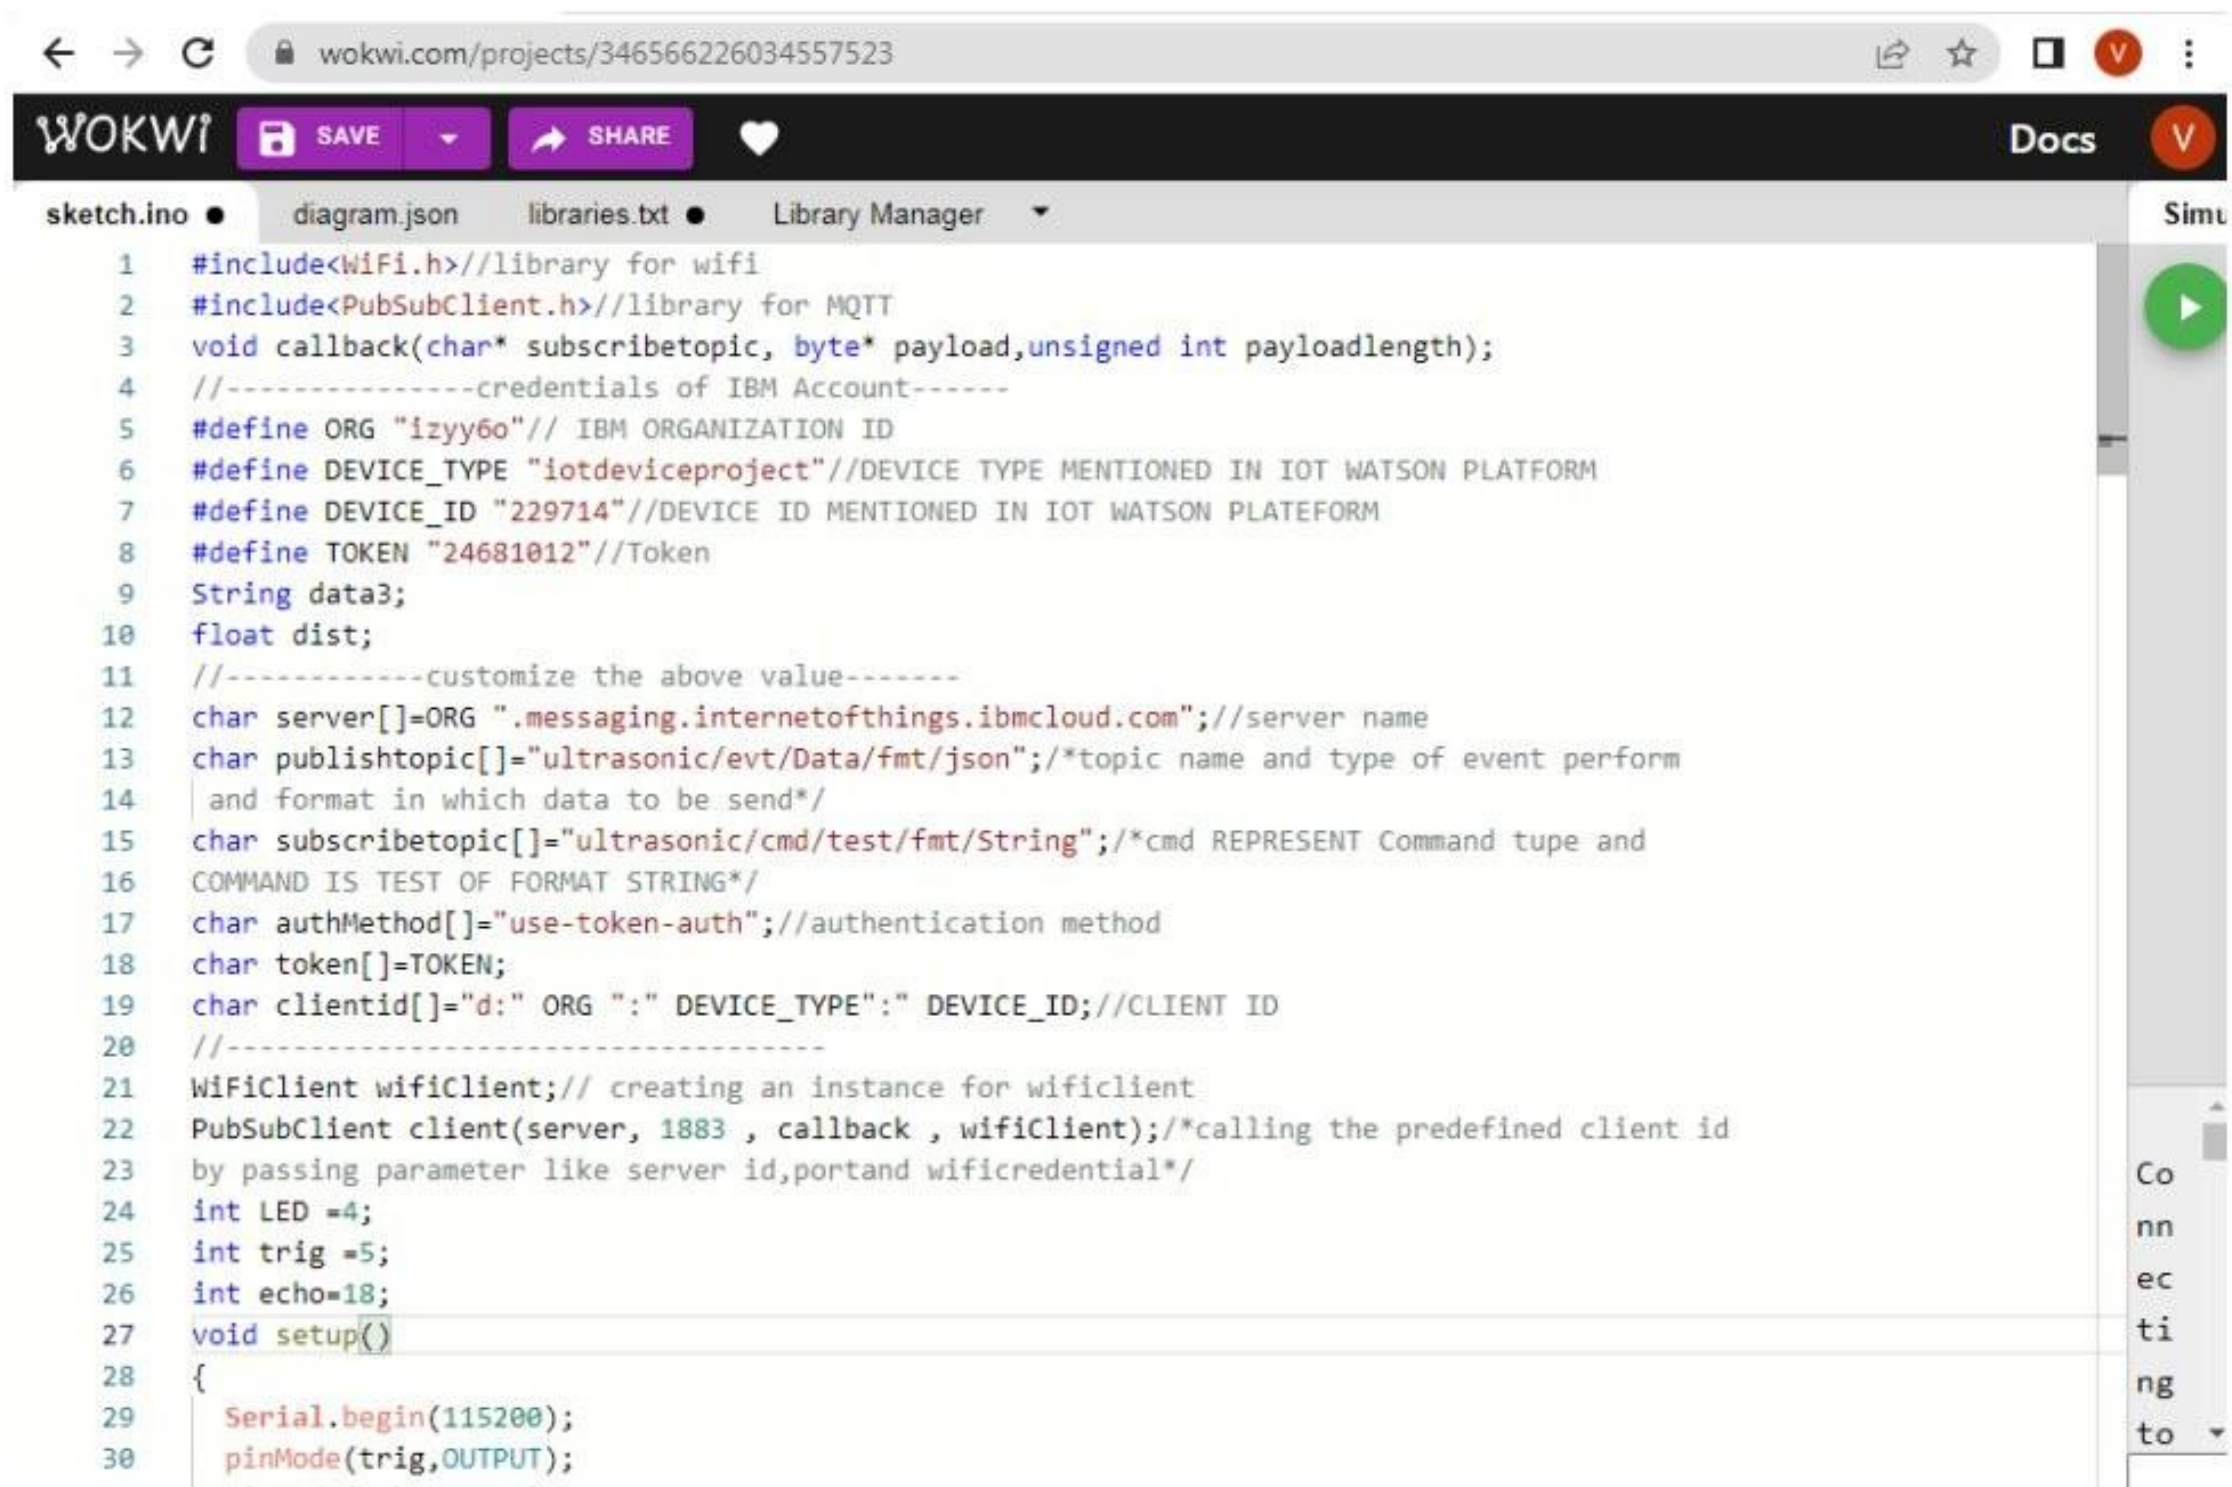| Assignment Date	25 October 2022
Student Name	K Vivek Narayana Reddy
Student Roll Number	110719104025
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor.

Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud

Solution:


```
1   #include<WiFi.h>//library for wifi
2   #include<PubSubClient.h>//library for MQTT
3   void callback(char* subscribetopic, byte* payload,unsigned int payloadlength);
4   //---------------credentials of IBM Account------
5   #define ORG "izyy6o"// IBM ORGANIZATION ID
6   #define DEVICE_TYPE "iotdeviceproject"//DEVICE TYPE MENTIONED IN IOT WATSON PLATFORM
7   #define DEVICE_ID "229714"//DEVICE ID MENTIONED IN IOT WATSON PLATEFORM
8   #define TOKEN "24681012"//Token
9   String data3;
10  float dist;
11  //------------customize the above value-------
12  char server[]=ORG ".messaging.internetofthings.ibmcloud.com";//server name
13  char publishtopic[]="ultrasonic/evt/Data/fmt/json";/*topic name and type of event perform
14   and format in which data to be send*/
15  char subscribetopic[]="ultrasonic/cmd/test/fmt/String";/*cmd REPRESENT Command tupe and
16  COMMAND IS TEST OF FORMAT STRING*/
17  char authMethod[]="use-token-auth";//authentication method
18  char token[]=TOKEN;
19  char clientid[]="d:" ORG ":" DEVICE_TYPE":" DEVICE_ID;//CLIENT ID
20  //---------------------------------
21  WiFiClient wifiClient;// creating an instance for wificlient
22  PubSubClient client(server, 1883 , callback , wifiClient);/*calling the predefined client id
23   by passing parameter like server id,portand wificredential*/
24  int LED =4;
25  int trig =5;
26  int echo=18;
27  void setup()
28  {
29    Serial.begin(115200);
30    pinMode(trig,OUTPUT);
```

```
31      pinMode(echo,INPUT);
32      pinMode(LED,OUTPUT);
33      delay(10);
34      wificonnect();
35      mqttconnect();
36    }
37    void loop()//recursive function
38    {
39      digitalWrite(trig,LOW);
40      digitalWrite(trig,HIGH);
41      delayMicroseconds(10);
42      digitalWrite(trig,LOW);
43      float dur=pulseIn(echo,HIGH);
44      float dist=(dur * 0.0343)/2;
45      Serial.print("distance in cm");
46      Serial.println(dist);
47      PublishData(dist);
48      delay(1000);
49      if (!client.loop()){
50        mqttconnect();
51      }
52    }
53    /*................................retriving to cloud............................*/
54    void PublishData(float dist){
55      mqttconnect();//function call for connecting to ibm
56      /*creating the string in form of JSON to update the data to ibm cloud*/
57      String object;
58      if(dist<100)
59      {
60        digitalWrite(LED,HIGH);
```

Conn
ec
ti
ng
to

```
61        Serial.println("no object is near");
62        object="Near";
63      }
64      else
65      {
66        digitalWrite(LED,LOW);
67        Serial.println("no object found");
68        object="No";
69      }
70      String payload="{\"distance\":";
71      payload +=dist;
72      payload +="," "\"object\":\"";
73      payload += object;
74      payload += "\"}";
75
76      Serial.print("Sending payload: ");
77      Serial.println(payload);
78      if(client.publish(publishtopic, (char*) payload.c_str())){
79        Serial.println("Publish ok");/* if its sucessfully upload data on the cloud then it will print
80        publish ok in serial monitor or else it will print publish failed*/
81      } else{
82        Serial.println("Publish failed");
83      }
84    }
85    void mqttconnect(){
86      if(!client.connected()){
87        Serial.print("Reconnecting client to ");
88        Serial.println(server);
89        while(!!!client.connect(clientid,authMethod, token)){
90          Serial.print(".");
91          delay(500);
```
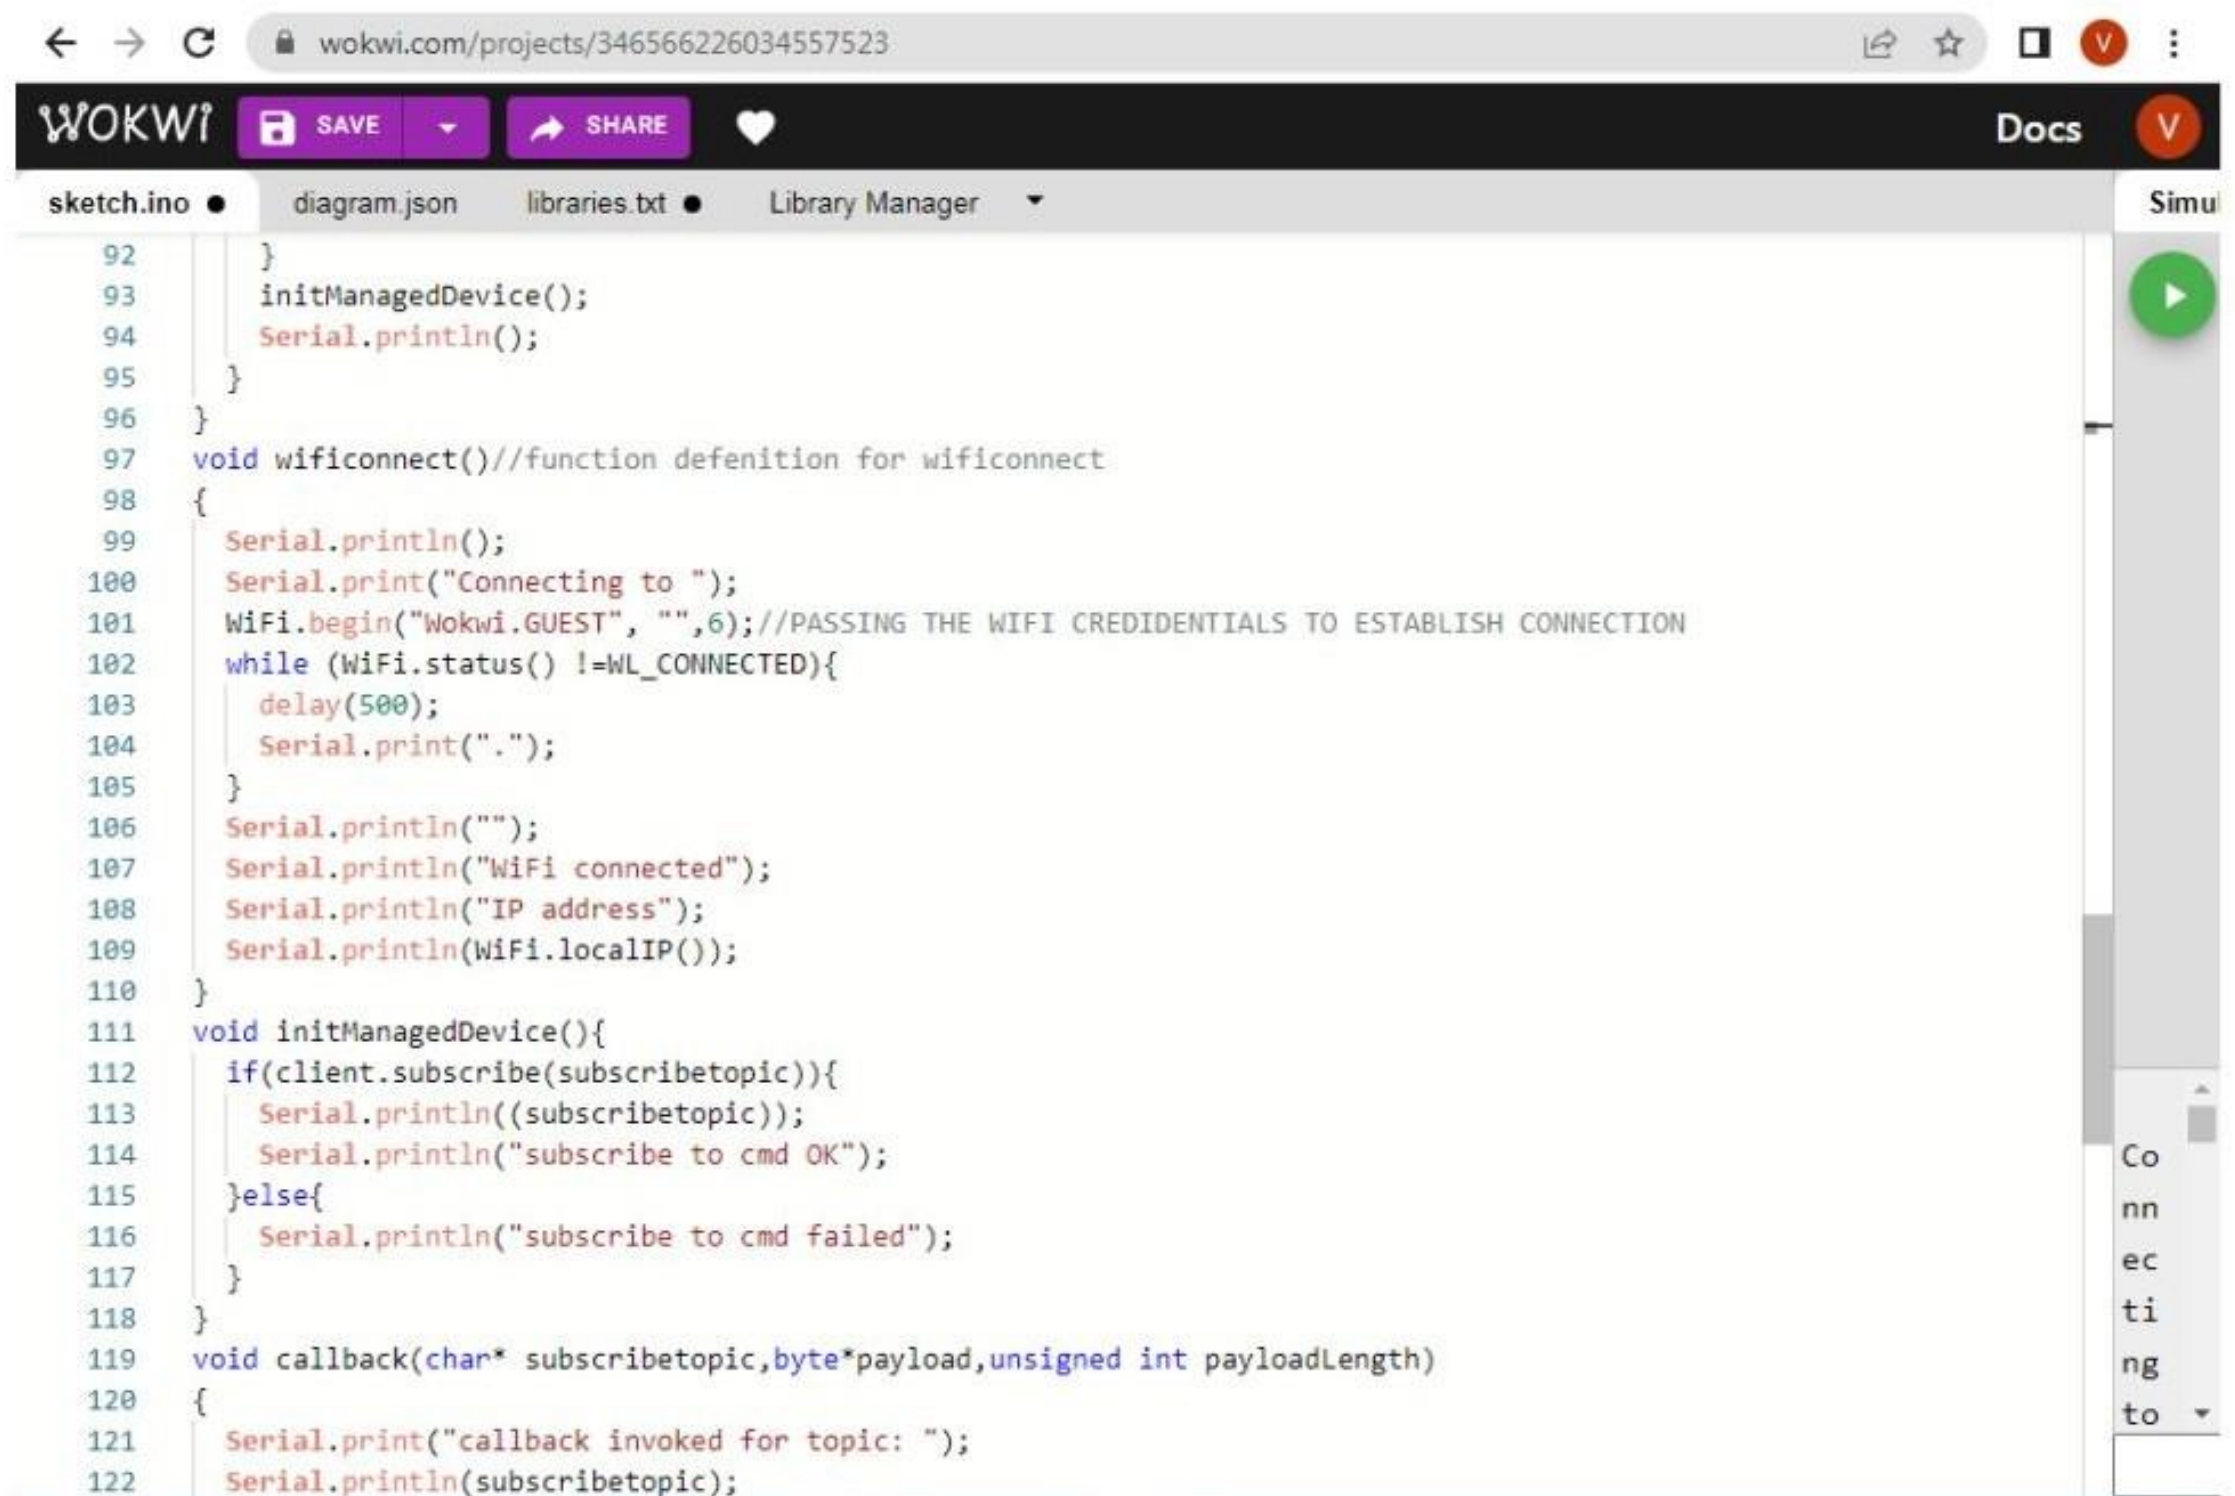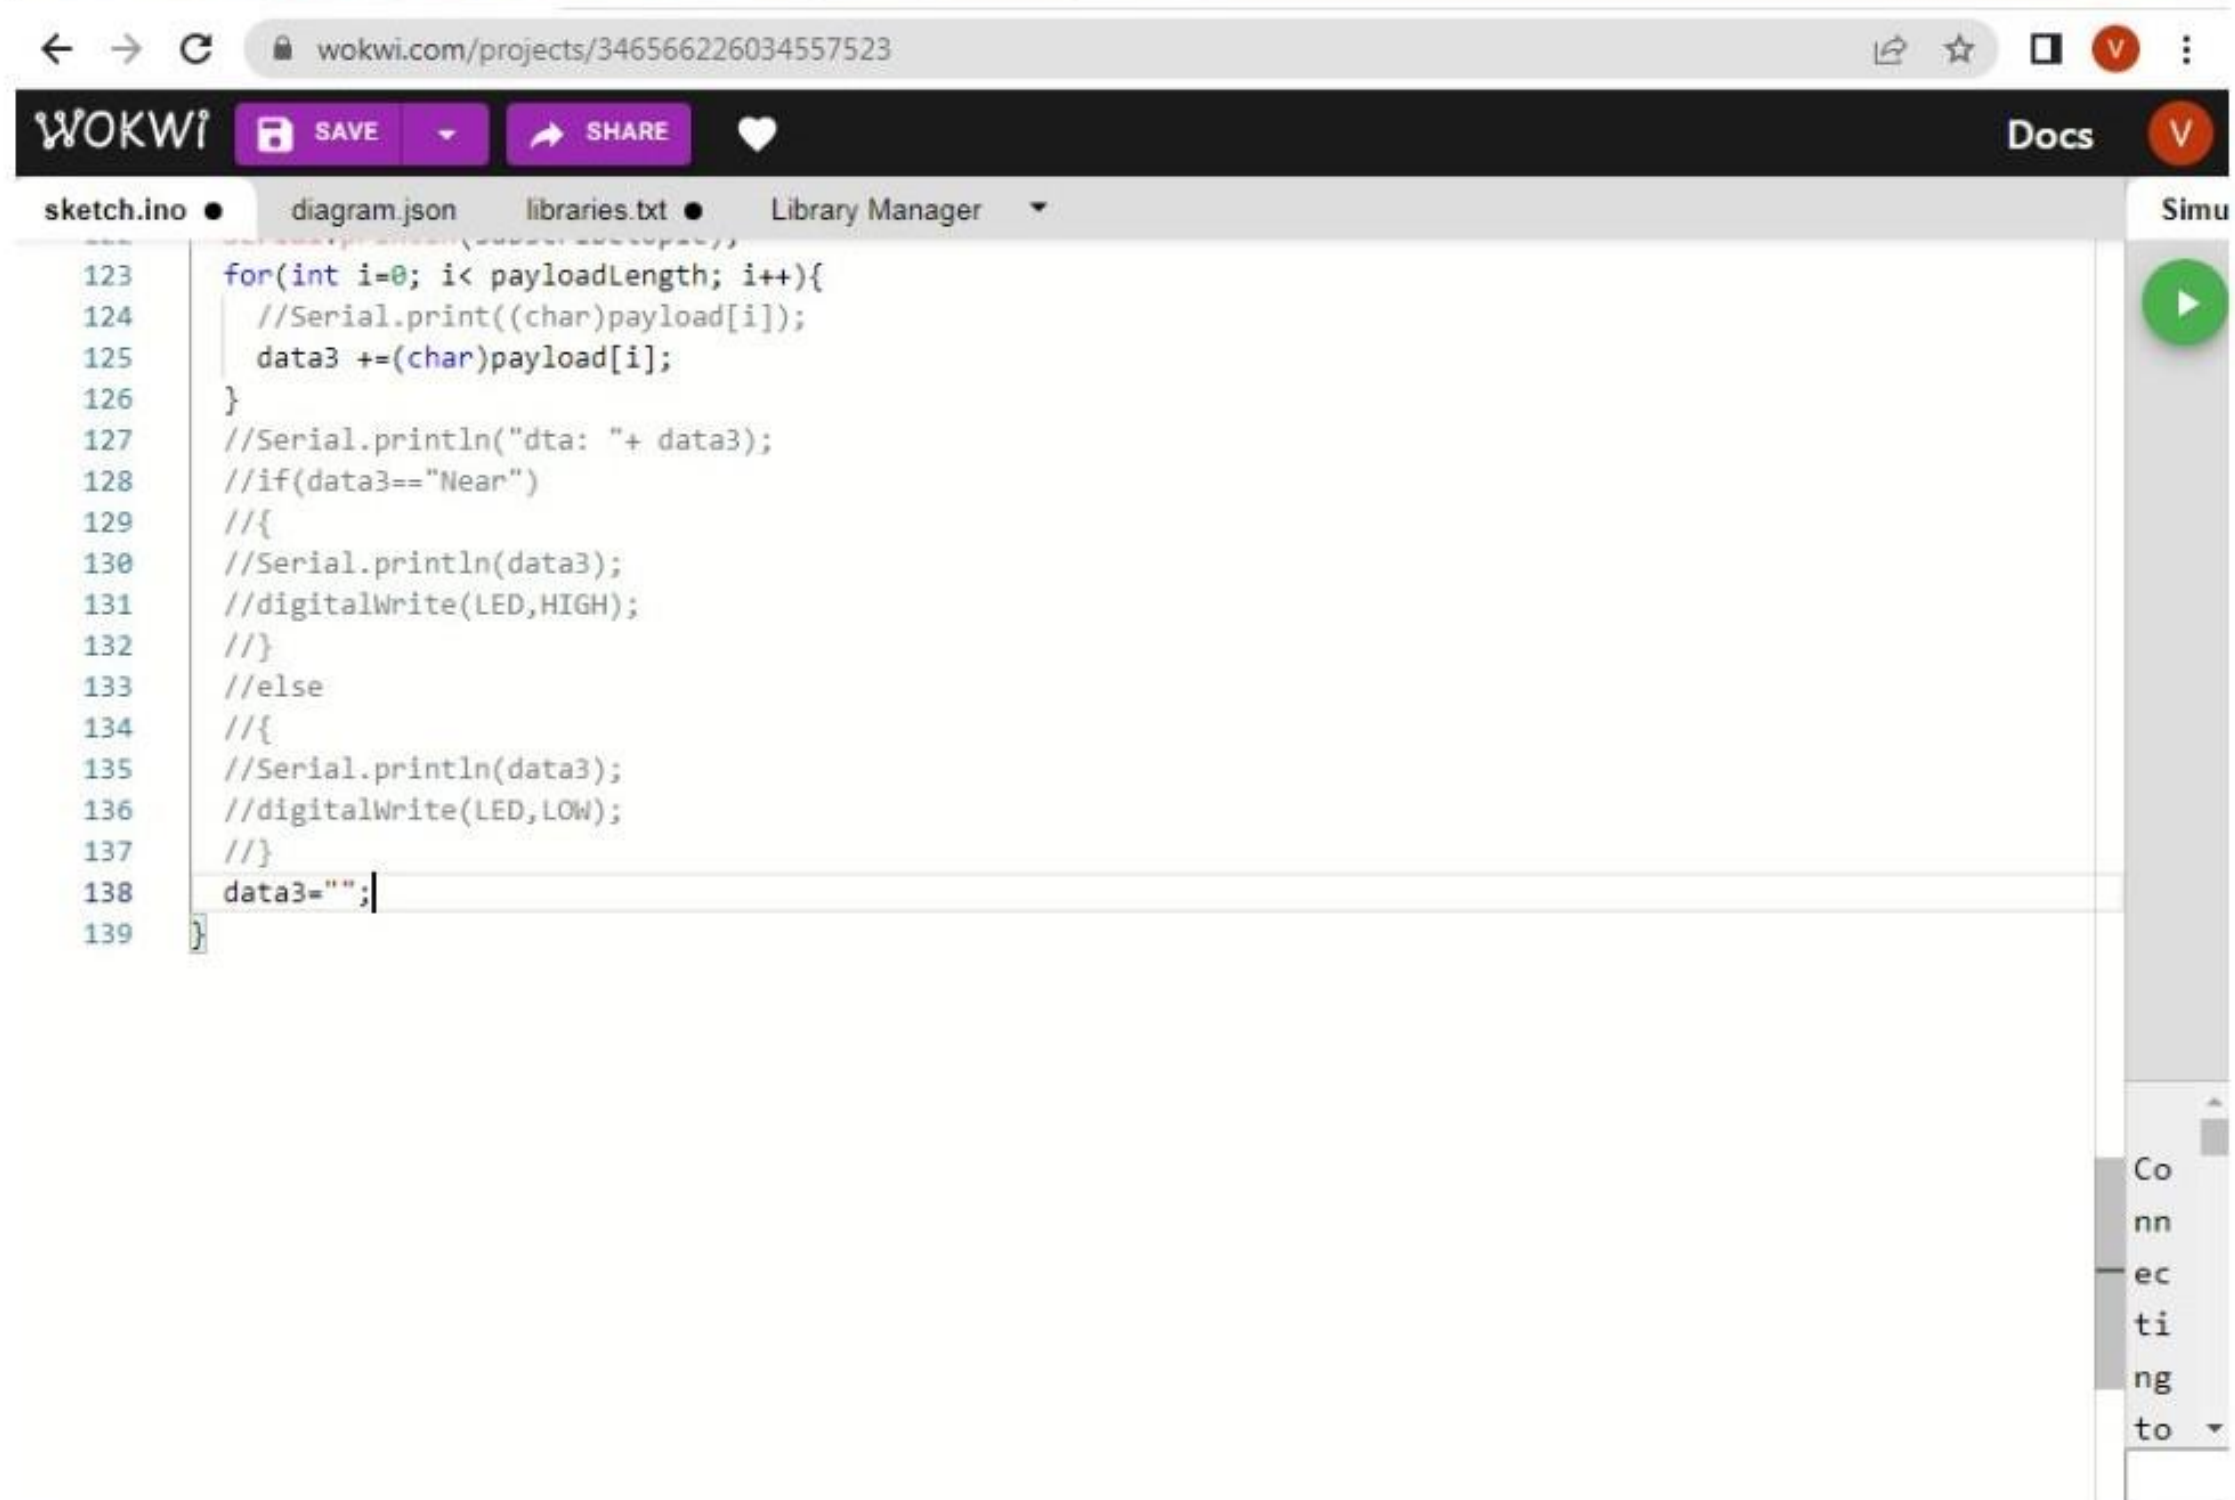
Conn
ec
ti
ng
to

```
 92        }
 93      initManagedDevice();
 94      Serial.println();
 95    }
 96  }
 97  void wificonnect()//function defenition for wificonnect
 98  {
 99    Serial.println();
100    Serial.print("Connecting to ");
101    WiFi.begin("Wokwi.GUEST", "",6);//PASSING THE WIFI CREDIDENTIALS TO ESTABLISH CONNECTION
102    while (WiFi.status() !=WL_CONNECTED){
103      delay(500);
104      Serial.print(".");
105    }
106    Serial.println("");
107    Serial.println("WiFi connected");
108    Serial.println("IP address");
109    Serial.println(WiFi.localIP());
110  }
111  void initManagedDevice(){
112    if(client.subscribe(subscribetopic)){
113      Serial.println((subscribetopic));
114      Serial.println("subscribe to cmd OK");
115    }else{
116      Serial.println("subscribe to cmd failed");
117    }
118  }
119  void callback(char* subscribetopic,byte*payload,unsigned int payloadLength)
120  {
121    Serial.print("callback invoked for topic: ");
122    Serial.println(subscribetopic);
```

Co
nn
ec
ti
ng
to

```
123    for(int i=0; i< payloadLength; i++){
124      //Serial.print((char)payload[i]);
125      data3 +=(char)payload[i];
126    }
127    //Serial.println("dta: "+ data3);
128    //if(data3=="Near")
129    //{
130    //Serial.println(data3);
131    //digitalWrite(LED,HIGH);
132    //}
133    //else
134    //{
135    //Serial.println(data3);
136    //digitalWrite(LED,LOW);
137    //}
138    data3="";
139  }
```

Co
nn
ec
ti
ng
to

OUTPUT:

DATA IS SENT TO IBM CLOUD WHEN NO OBJECT IS DETECTED

When no object is detected


```
1   #include<WiFi.h>//library for wifi
2   #include<PubSubClient.h>//library for MQ
3   void callback(char* subscribetopic, byte
4   //---------------credentials of IBM Acco
5   #define ORG "izyy6o"// IBM ORGANIZATION
6   #define DEVICE_TYPE "iotdeviceproject"//
7   #define DEVICE_ID "229714"//DEVICE ID ME
8   #define TOKEN "24681012"//Token
9   String data3;
10  float dist;
11  //-----------customize the above value-
12  char server[]=ORG ".messaging.internetof
13  char publishtopic[]="ultrasonic/evt/Data
14   and format in which data to be send*/
15  char subscribetopic[]="ultrasonic/cmd/te
16  COMMAND IS TEST OF FORMAT STRING*/
17  char authMethod[]="use-token-auth";//aut
18  char token[]=TOKEN;
19  char clientid[]="d:" ORG ":" DEVICE_TYPE
20  //-------------------------------------
21  WiFiClient wifiClient;// creating an ins
22  PubSubClient client(server, 1883 , callb
23  by passing parameter like server id,port
24  int LED =4;
25  int trig =5;
26  int echo=18;
27  void setup()
28  {
29    Serial.begin(115200);
```

```
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
Distancein cm141.21
no object found
Sending payload: {"distance":141.21,"object":"No"}
Publish ok
```

Data is sent to ibm cloud when object is detected

When object is detected in ultrasonic detector


```
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
Distancein cm97.82
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
```