Assignment-1

Domain   : IOT
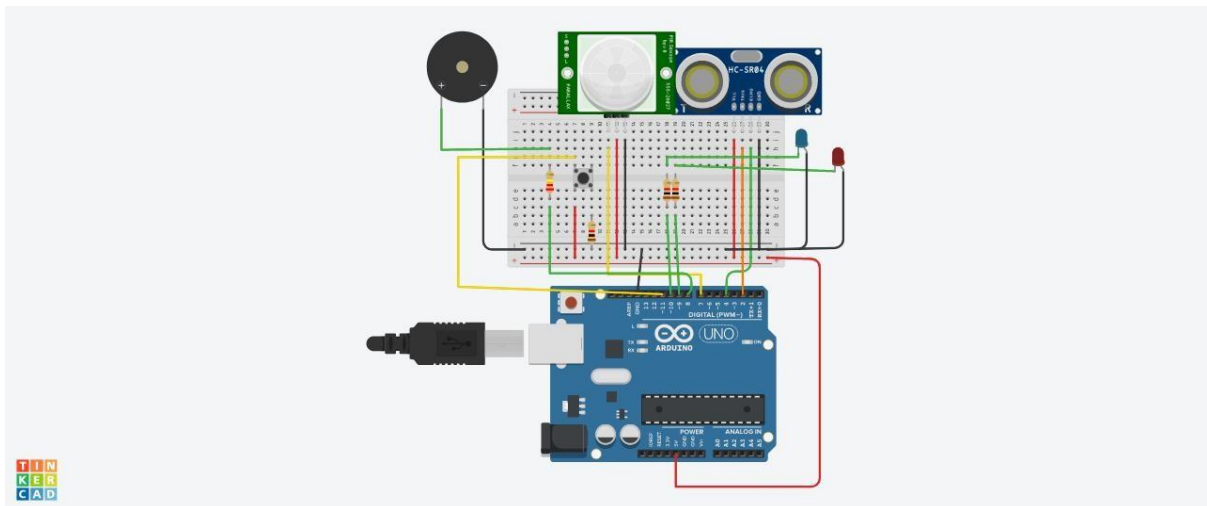
TOPIC   : SMART WASTE MANAGEMENT SYSTEM

NAME   :KANCHANADEVI

REG.NUMBER   : 715319104011

COLLEGE   : ASIAN COLLEGE OF ENGINEERING AND TECHNOLOGY

Circuit:

Components:

Quantity	Components
1	Push Button
1	Red LED
1	Blue LED
1	PIEZO Buzzer
1	Ultrasonic Distance Sensor
2	PIR Sensor
2	Resistor (220,560,10K)
1	Arduino R3

1	Breadboard Small

Code:

```
const int trigPin = 2; //the trig pin of the ultrasonic sensor; sends signal

const int echoPin = 4; //the echo pin of the ultrasonic sensor; detects signal


const int pirPin = 7; //the PIR sensor pin

int pirState = LOW; //basically means that the PIR sensor starts as low and
detects no motion


const int buzzerPin = 8; //the buzzer has been connected to pin 8


const int redLED = 9; //the red LED; intensity can be controlled to change the
colour emitted

int redBright = 0;    // how bright the LED is

int redFade = 5;    // how many points to fade the LED by


const int greenLED = 10; //the green LED; intensity can be controlled to change
the colour emitted

int greenBright = 0;    // how bright the LED is

int greenFade = 5;    // how many points to fade the LED by


const int button = 13; //button to momentarily reset all the sensors back to
normal


void setup() {


  pinMode(echoPin, INPUT);
```

```
  pinMode(pirPin, INPUT);

  pinMode(button, INPUT);


  pinMode(trigPin, OUTPUT);

  pinMode(redLED, OUTPUT);

  pinMode(greenLED, OUTPUT);

  pinMode(buzzerPin, OUTPUT);


  Serial.begin(9600); // initialize serial communication at 9600 bits per second

}


void distance() {


  long durationInDigit;

  long distanceInInches;


  digitalWrite (trigPin, LOW); //set this to LOW to start with

  delayMicroseconds(2); //delay in microseconds between different commands

  digitalWrite (trigPin, HIGH); //here, the trig pin sends signals or vibrations to
be detected

  delayMicroseconds(10);

  digitalWrite (trigPin, LOW); //set the the trig pin back to low


  durationInDigit = pulseIn(echoPin, HIGH);

  distanceInInches = durationInDigit/74/2;


  Serial.println(distanceInInches);
```

```
if (distanceInInches > 15 && distanceInInches < 30) {
  digitalWrite(greenLED, HIGH);
  digitalWrite(redLED, LOW);
}

if (distanceInInches < 10) {
  digitalWrite(redLED, HIGH);
  digitalWrite(greenLED, LOW);
}

if (distanceInInches > 10 && distanceInInches < 15){
  digitalWrite(redLED, LOW);
  digitalWrite(greenLED, LOW);
}

if (distanceInInches < 5) {
  digitalWrite(redLED, HIGH);
  tone(8, 250, 2000);
  digitalWrite(greenLED, 0);
}

if (distanceInInches > 5 && distanceInInches < 10){
  digitalWrite(redLED, HIGH);
  digitalWrite(buzzerPin, 0);
  digitalWrite(greenLED, 0);
}
```

```
    if (distanceInInches > 30 || distanceInInches < 0){
      Serial.println("Distance Incalculable");
    }

  delay(500);

}

void reset() {
  if (digitalRead(button), HIGH);
   digitalWrite(pirState, LOW);
   digitalWrite(redLED, LOW);
   digitalWrite(greenLED, HIGH);
   digitalWrite(buzzerPin, 0);
   //digitalWrite(echoPin, 0);
}

void loop() {

  distance();

  int pirState = digitalRead(pirPin);

  if (pirState==1) {
    Serial.println("Motion Detected!!!");
    digitalWrite(greenLED, LOW);
    digitalWrite(redLED, HIGH);
```

```
    digitalWrite(buzzerPin, 1);
    delay(500);
  }

  if (pirState==0) {
    Serial.println("Detecting...");
    digitalWrite(greenLED, HIGH);
    digitalWrite(redLED, LOW);
    digitalWrite(buzzerPin, 0);
    delay(500);
    }

}
```