# Assignment -1

## Tinkercad

| | |
|---|---|
| Assignment date | 16.9.2022 |
| Student name | S.Manisha |
| Student roll number | 912619106006 |
| Maximum mark | 2 marks |

Question-1:

Write the code and make smart home with atleast 2sensors and LED,BUZZER.using tinkercad

Solution:

```
#include <Servo.h>


int output1Value = 0;

int sen1Value = 0;

int sen2Value = 0;

int const gas_sensor = A1;

int const LDR = A0;

int limit = 400;


long readUltrasonicDistance(int triggerPin, int echoPin)

{

  pinMode(triggerPin, OUTPUT);  // Clear the trigger

  digitalWrite(triggerPin, LOW);
```

```
  delayMicroseconds(2);
// Sets the trigger pin to HIGH state for 10 microseconds
  digitalWrite(triggerPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(triggerPin, LOW);
  pinMode(echoPin, INPUT);
  // Reads the echo pin, and returns the sound wave travel time in microseconds
  return pulseIn(echoPin, HIGH);
}

Servo servo_7;

void setup()
{
   Serial.begin(9600);          //initialize serial communication
  pinMode(A0, INPUT);              //LDR
  pinMode(A1,INPUT);       //gas sensor
  pinMode(13, OUTPUT);           //connected to relay
  servo_7.attach(7, 500, 2500); //servo motor

  pinMode(8,OUTPUT);       //signal to piezo buzzer
  pinMode(9, INPUT);         //signal to PIR
```

```
  pinMode(10, OUTPUT);           //signal to npn as switch
  pinMode(4, OUTPUT);            //Red LED
  pinMode(3, OUTPUT);            //Green LED

}

void loop()
{

     //------light intensity control------//
//-------------------------------------------------------------
    int val1 = analogRead(LDR);
  if (val1 > 500)
         {
         digitalWrite(13, LOW);
    Serial.print("Bulb ON = ");
    Serial.print(val1);
         }
  else
         {
         digitalWrite(13, HIGH);
     Serial.print("Bulb OFF = ");
```

```
    Serial.print(val1);
        }

//-------------------------------------------------------------
       //------ light & fan control --------//
//-------------------------------------------------------------
  sen2Value = digitalRead(9);
  if (sen2Value == 0)
        {
        digitalWrite(10, LOW); //npn as switch OFF
        digitalWrite(4, HIGH); // Red LED ON,indicating no motion
        digitalWrite(3, LOW); //Green LED OFF, since no Motion
detected
    Serial.print("     || NO Motion Detected    " );
        }


  if (sen2Value == 1)
        {
        digitalWrite(10, HIGH);//npn as switch ON
    delay(5000);
        digitalWrite(4, LOW); // RED LED OFF
        digitalWrite(3, HIGH);//GREEN LED ON , indicating motion
detected
```

```
    Serial.print("    || Motion Detected!      " );
        }


//-------------------------------------------------------------
      // ------- Gas Sensor --------//
//-------------------------------------------------------------
int val = analogRead(gas_sensor);      //read sensor value
  Serial.print("|| Gas Sensor Value = ");
  Serial.print(val);                              //Printing in serial monitor
//val = map(val, 300, 750, 0, 100);
  if (val > limit)
        {
        tone(8, 650);
        }
        delay(300);
        noTone(8);


 //-------------------------------------------------------------
     //-------  servo motor  ---------//
 //-------------------------------------------------------------
  sen1Value = 0.01723 * readUltrasonicDistance(6, 6);
```

```
  if (sen1Value < 100)
        {
        servo_7.write(90);
    Serial.print("    || Door Open!  ; Distance = ");
    Serial.print(sen1Value);
   Serial.print("\n");


        }
  else
        {
        servo_7.write(0);
    Serial.print("    || Door Closed! ; Distance =  ");
    Serial.print(sen1Value);
    Serial.print("\n");
  }
  delay(10); // Delay a little bit to improve simulation performance
}
```

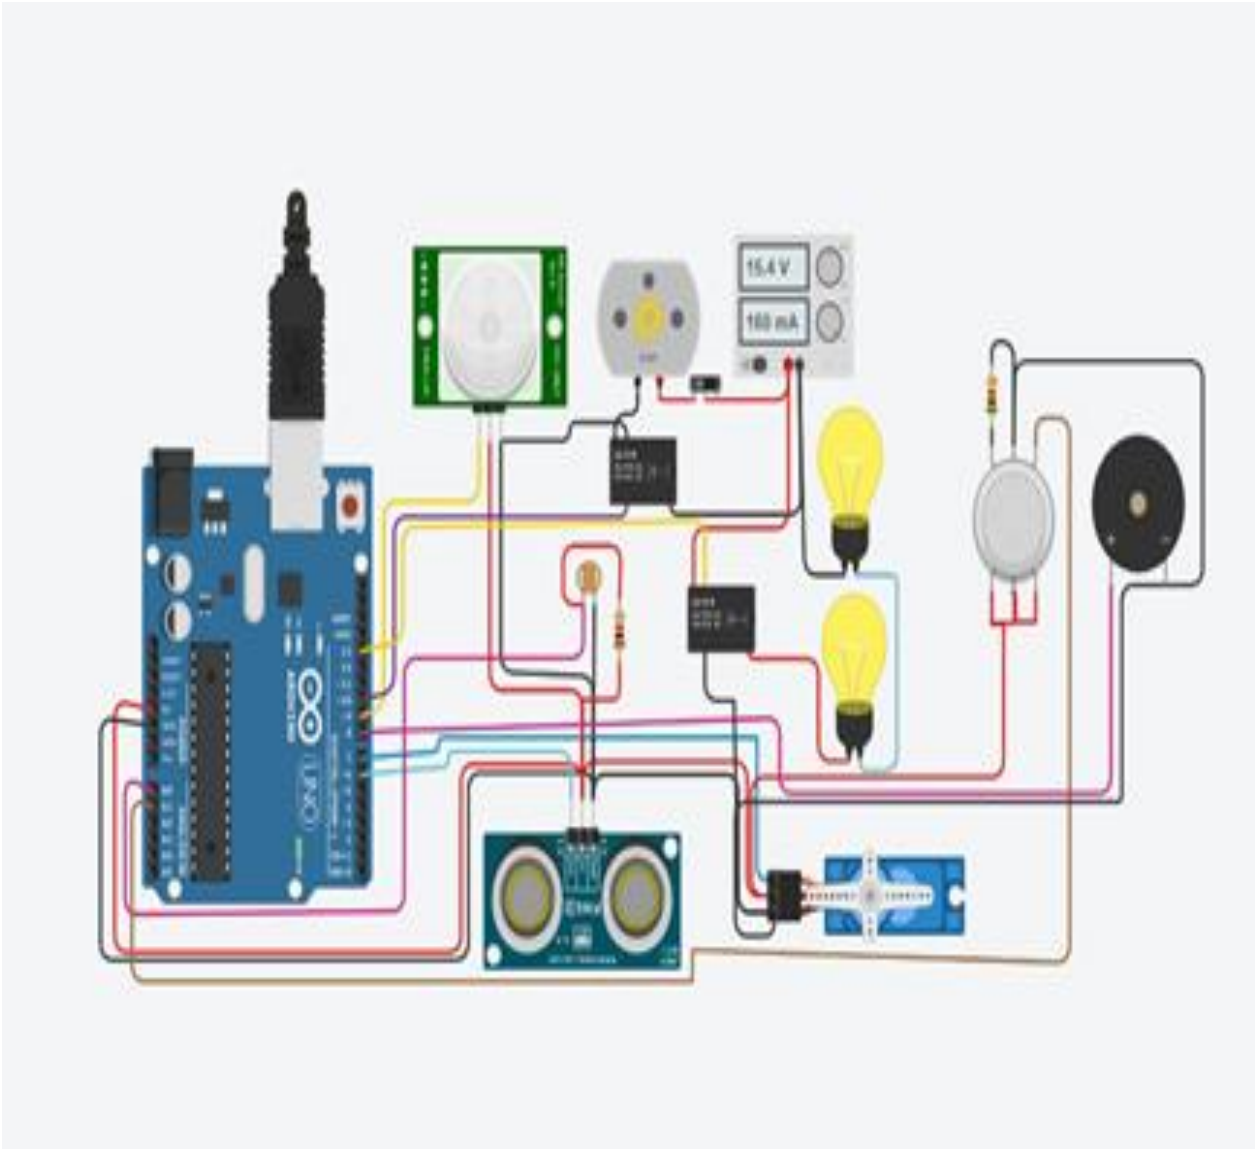
15.4 V
160 mA