
MonoPod | TDA1308 stereo headphone amplifier


R2 | 3.3 V default, 5 V only after bench validation | 32 ohm load | 50 x 35 mm PCB

SUPPLY / HALF-SUPPLY REFERENCE

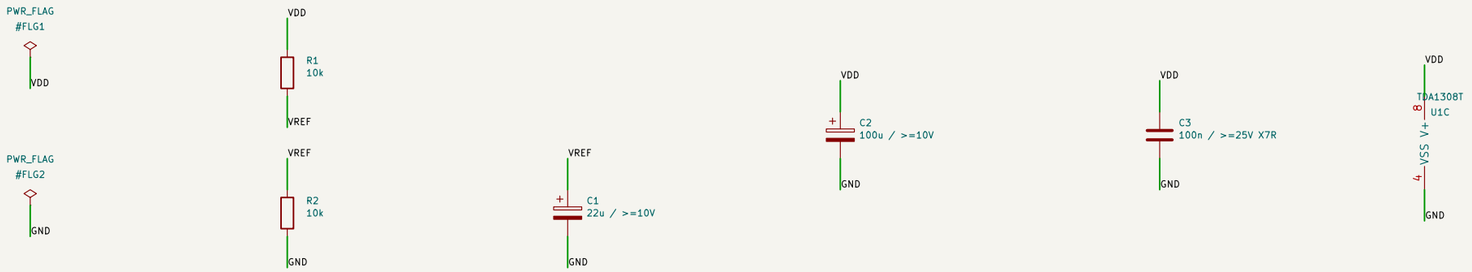

C1/C2: + to VREF/VDD. C3: leaded ceramic, short leads by U1 pin 8.

LEFT CHANNEL / ATTENUATED DEFAULT

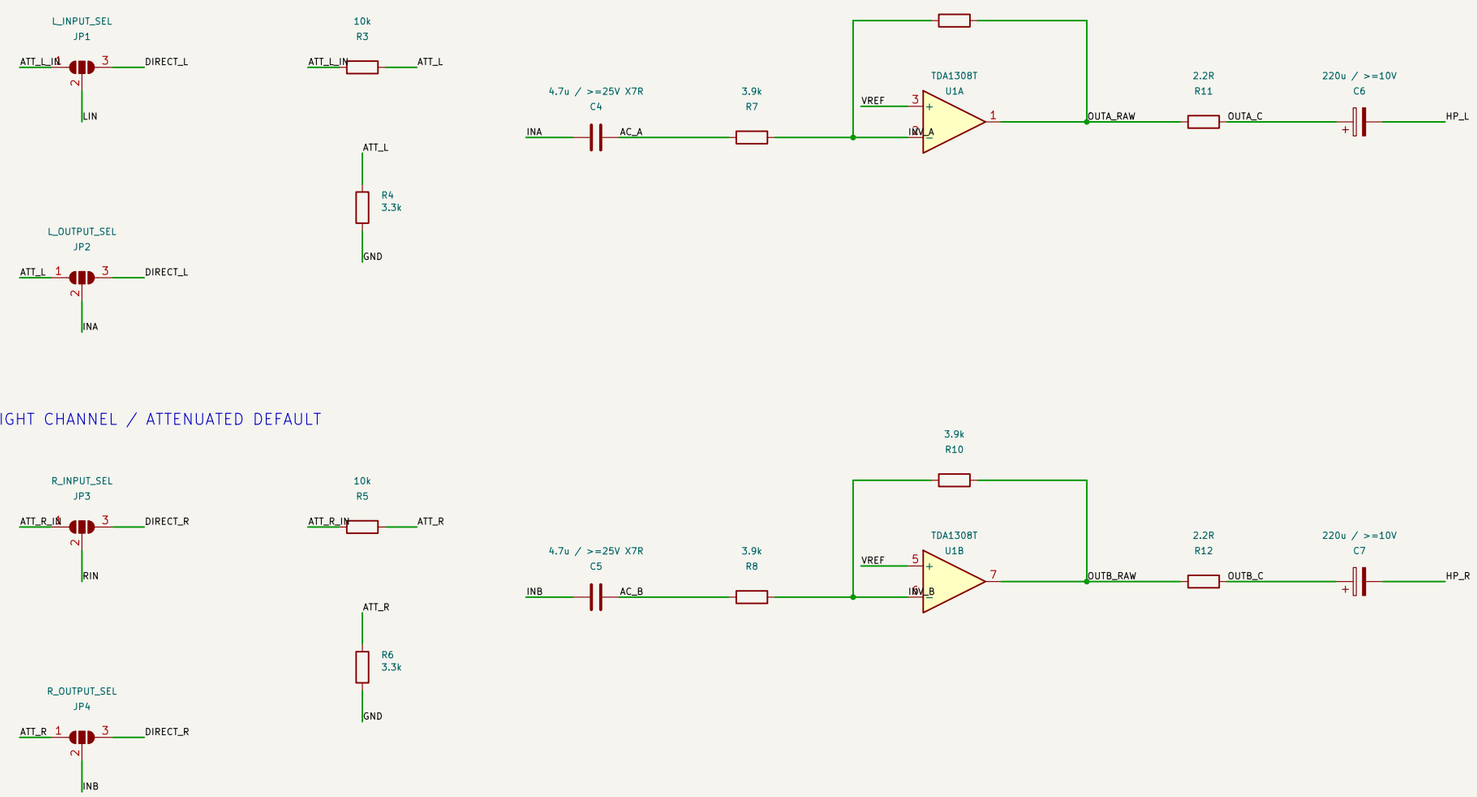

RIGHT CHANNEL / ATTENUATED DEFAULT

JP1/JP2 = LEFT; JP3/JP4 = RIGHT. All are open copper pads before assembly.

ATTENUATED default: solder 1–2 on all four jumpers. DIRECT: clear 1–2, then solder 2–3.

Change BOTH selectors of a channel together. This isolates the unused divider at both ends.

Loaded ATT midband = −16.4 dB before 2.2R output. Active stage = −1. Input capacitors nonpolar.

C6/C7 positive terminals toward U1. No headphones on RAW outputs. Cable stability requires bench test.

WIRE PADS



TEST PADS



INA/INB: selected signal BEFORE C4/C5.

ONE copper side B.Cu. SMD bottom; all capacitors top.

U1 pin1 = OUTA. Bottom placement is mirrored in top view.

NXP TDA1308 Rev.5 (2011), Fig.4 p.6.

3.3V / 32ohm | bench qualification required

Sheet: /
File: TDA1308_HeadphoneAmp.kicad_sch

Title: MonoPod TDA1308 Headphone Amplifier

Size: A3	Date: 2026-10-27	**Rev: R2**
KiCad E.D.A. 10.0.6		Id: 1/1