



- Full Look-Ahead for High-Speed Operations on Long Words
- Input Clamping Diodes Minimize Transmission-Line Effects
- Darlington Outputs Reduce Turn-Off Time
- Arithmetic Operating Modes:
 - Addition
 - Subtraction
 - Shift Operand A One Position
 - Magnitude Comparison
 - Plus Twelve Other Arithmetic Operations
- Logic Function Modes:
 - Exclusive-OR
 - Comparator
 - AND, NAND, OR, NOR
 - Plus Ten Other Logic Operations

SN54LS181, SN54S181 . . . J OR W PACKAGE
SN74LS181, SN74S181 . . . DW OR N PACKAGE



SN54LS181, SN54S181 . . . FK PACKAGE

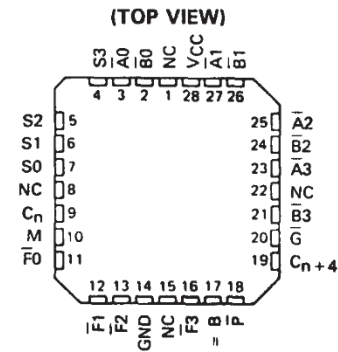

NC - No internal connection

TYPICAL ADDITION TIMES

NUMBER OF BITS	ADDITION TIMES		PACKAGE COUNT		CARRY METHOD BETWEEN ALUs
	USING 'LS181 AND 'S182	USING 'S181 AND 'S182	ARITHMETIC/ LOGIC UNITS	LOOK-AHEAD CARRY GENERATORS	
1 to 4	24 ns	11 ns	1		NONE
5 to 8	40 ns	18 ns	2		RIPPLE
9 to 16	44 ns	19 ns	3 or 4	1	FULL LOOK-AHEAD
17 to 64	68 ns	28 ns	5 to 16	2 to 5	FULL LOOK-AHEAD

description

The 'LS181 and 'S181 are arithmetic logic units (ALU)/function generators that have a complexity of 75 equivalent gates on a monolithic chip. These circuits perform 16 binary arithmetic operations on two 4-bit words as shown in Tables 1 and 2. These operations are selected by the four function-select lines (S0, S1, S2, S3) and include addition, subtraction, decrement, and straight transfer. When performing arithmetic manipulations, the internal carries must be enabled by applying a low-level voltage to the mode control input (M). A full carry look-ahead scheme is made available in these devices for fast, simultaneous carry generation by means of two cascade-outputs (pins 15 and 17) for the four bits in the package. When used in conjunction with the SN54S182 or SN74S182 full carry look-ahead circuits, high-speed arithmetic operations can be performed. The typical addition times shown above illustrate the little additional time required for addition of longer words when full carry look-ahead is employed. The method of cascading 'S182 circuits with these ALUs to provide multi-level full carry look-ahead is illustrated under typical applications data for the 'S182.

If high speed is not of importance, a ripple-carry input (C_n) and a ripple-carry output ($C_n + 4$) are available. However, the ripple-carry delay has also been minimized so that arithmetic manipulations for small word lengths can be performed without external circuitry.

SN54LS181, SN54S181, SN74LS181,
SN74S181
ARITHMETISCH-LOGISCHE
EINHEITEN/FUNKTIONSGENERATOREN

SDLS136 – DEZEMBER 1972 – ÜBERARBEITET IM MARZ 1988

description (continued)

The 'LS181 and 'S181 will accommodate active-high data if the pin designations are interpreted as follows:

PIN NUMBER	2	1	23	22	21	20	19	18	9	10	11	13	7	16	15	17
Active-low data (Table 1)	$\bar{A}_0$	$\bar{B}_0$	$\bar{A}_1$	$\bar{B}_1$	$\bar{A}_2$	$\bar{B}_2$	$\bar{A}_3$	$\bar{B}_3$	$\bar{F}_0$	$\bar{F}_1$	$\bar{F}_2$	$\bar{F}_3$	C_n	C_{n+4}	$\bar{P}$	$\bar{G}$
Active-high data (Table 2)	A0	B0	A1	B1	A2	B2	A3	B3	F0	F1	F2	F3	$\bar{C}_n$	$\bar{C}_{n+4}$	X	Y

Subtraction is accomplished by 1's complement addition where the 1's complement of the subtrahend is generated internally. The resultant output is $A-B-1$, which requires an end-around or forced carry to provide $A-B$.

The 'LS181 or 'S181 can also be utilized as a comparator. The $A = B$ output is internally decoded from the function outputs (F_0, F_1, F_2, F_3) so that when two words of equal magnitude are applied at the A and B inputs, it will assume a high level to indicate equality ($A=B$). The ALU must be in the subtract mode with $C_n = H$ when performing this comparison. The $A = B$ output is open-collector so that it can be wire-AND connected to give a comparison for more than four bits. The carry output (C_{n+4}) can also be used to supply relative magnitude information. Again, the ALU must be placed in the subtract mode by placing the function select inputs S_3, S_2, S_1, S_0 at L, H, H, L, respectively.

INPUT C_n	OUTPUT C_{n+4}	ACTIVE-LOW DATA (FIGURE 1)	ACTIVE-HIGH DATA (FIGURE 2)
H	H	$A > B$	$A < B$
H	L	$A < B$	$A > B$
L	H	$A > B$	$A < B$
L	L	$A < B$	$A > B$


These circuits have been designed to not only incorporate all of the designer's requirements for arithmetic operations, but also to provide 16 possible functions of two Boolean variables without the use of external circuitry. These logic functions are selected by use of the four function-select inputs (S_0, S_1, S_2, S_3) with the mode-control input (M) at a high level to disable the internal carry. The 16 logic functions are detailed in Tables 1 and 2 and include exclusive-OR, NAND, AND, NOR, and OR functions.

Series 54, 54LS, and 54S devices are characterized for operation over the full military temperature range of -55°C to 125°C ; Series 74LS and 74S devices are characterized for operation from 0°C to 70°C .

signal designations

In both Figures 1 and 2, the polarity indicators (∇) indicate that the associated input or output is active-low with respect to the function shown inside the symbol, and the symbols are the same in both figures. The signal designations in Figure 1 agree with the indicated internal functions based on active-low data, and are for use with the logic functions and arithmetic operations shown in Table 1. The signal designations have been changed in Figure 2 to accommodate the logic functions and arithmetic operations for the active-high data given in Table 2. The 'LS181 and 'S181, together with the 'S182, can be used with the signal designation of either Figure 1 or Figure 2.

logic symbols[†] and signal designations (active-low data)

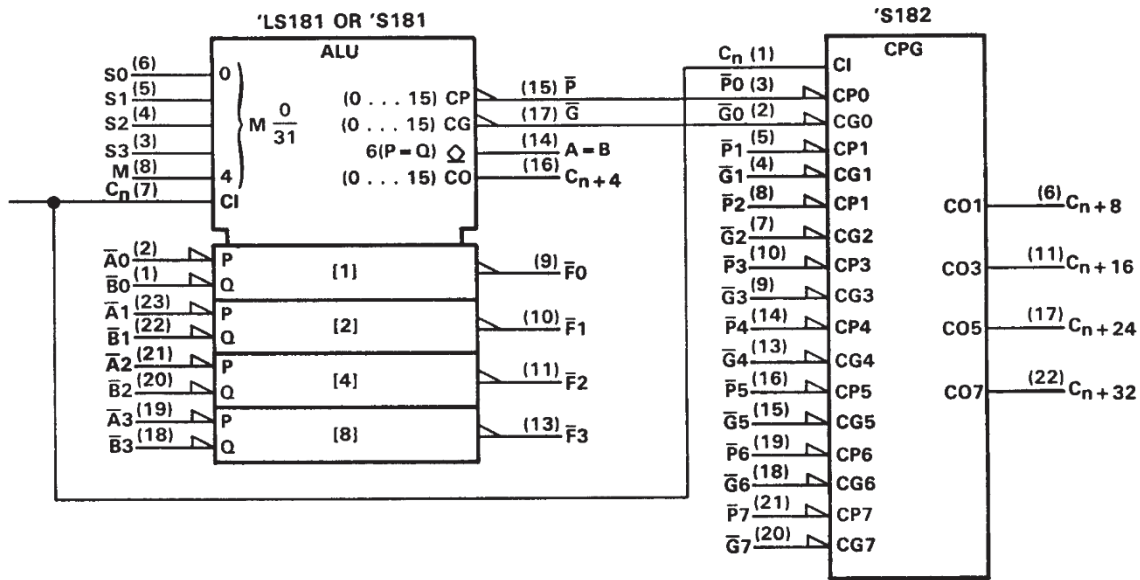

[†]These symbols are in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.
Pin numbers shown are for dual-in-line and "small outline" packages.

FIGURE 1 (USE WITH TABLE 1)

TABLE 1


SELECTION				ACTIVE-LOW DATA		
				M = H LOGIC FUNCTIONS	M = L; ARITHMETIC OPERATIONS	
					Cn = L (no carry)	Cn = H (with carry)
S3	S2	S1	S0			
L	L	L	L	$F = \bar{A}$	$F = A \text{ MINUS } 1$	$F = A$
L	L	L	H	$F = \bar{A}\bar{B}$	$F = AB \text{ MINUS } 1$	$F = AB$
L	L	H	L	$F = \bar{A} + B$	$F = \bar{A}\bar{B} \text{ MINUS } 1$	$F = \bar{A}\bar{B}$
L	L	H	H	$F = 1$	$F = \text{MINUS } 1 \text{ (2's COMP)}$	$F = \text{ZERO}$
L	H	L	L	$F = \bar{A} + \bar{B}$	$F = A \text{ PLUS } (A + \bar{B})$	$F = A \text{ PLUS } (A + \bar{B}) \text{ PLUS } 1$
L	H	L	H	$F = \bar{B}$	$F = AB \text{ PLUS } (A + \bar{B})$	$F = AB \text{ PLUS } (A + \bar{B}) \text{ PLUS } 1$
L	H	H	L	$F = \bar{A} \oplus B$	$F = A \text{ MINUS } B \text{ MINUS } 1$	$F = A \text{ MINUS } B$
L	H	H	H	$F = A + \bar{B}$	$F = A + \bar{B}$	$F = (A + \bar{B}) \text{ PLUS } 1$
H	L	L	L	$F = \bar{A}B$	$F = A \text{ PLUS } (A + B)$	$F = A \text{ PLUS } (A + B) \text{ PLUS } 1$
H	L	L	H	$F = A \oplus B$	$F = A \text{ PLUS } B$	$F = A \text{ PLUS } B \text{ PLUS } 1$
H	L	H	L	$F = B$	$F = \bar{A}\bar{B} \text{ PLUS } (A + B)$	$F = \bar{A}\bar{B} \text{ PLUS } (A + B) \text{ PLUS } 1$
H	L	H	H	$F = A + B$	$F = (A + B)$	$F = (A + B) \text{ PLUS } 1$
H	H	L	L	$F = 0$	$F = A \text{ PLUS } A^\ddagger$	$F = A \text{ PLUS } A \text{ PLUS } 1$
H	H	L	H	$F = \bar{A}\bar{B}$	$F = AB \text{ PLUS } A$	$F = AB \text{ PLUS } A \text{ PLUS } 1$
H	H	H	L	$F = AB$	$F = \bar{A}\bar{B} \text{ PLUS } A$	$F = \bar{A}\bar{B} \text{ PLUS } A \text{ PLUS } 1$
H	H	H	H	$F = A$	$F = A$	$F = A \text{ PLUS } 1$

[‡]Each bit is shifted to the next more significant position.

ARITHMETISCH-LOGISCHE EINHEITEN/FUNKTIONSGENERATOREN

SDLS136 – DEZEMBER 1972 – UBERARBEITET IM MARZ 1988

logic symbols† and signal designations (active-high data)

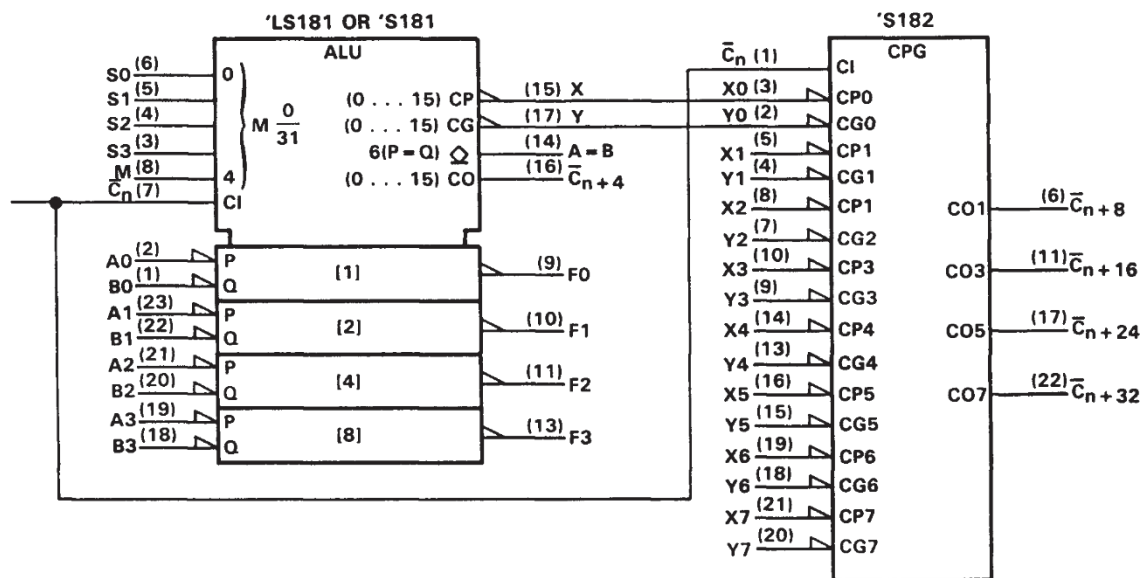

†These symbols are in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.
Pin numbers shown are for dual-in-line and "small outline" packages.


FIGURE 2 (USE WITH TABLE 2)

TABLE 2

SELECTION				ACTIVE-HIGH DATA		
				M = H	M = L; ARITHMETIC OPERATIONS	
S3	S2	S1	S0	LOGIC FUNCTIONS	Cn = H (no carry)	Cn = L (with carry)
L	L	L	L	$F = \overline{A}$	$F = A$	$F = A \text{ PLUS } 1$
L	L	L	H	$F = \overline{A + B}$	$F = A + B$	$F = (A + B) \text{ PLUS } 1$
L	L	H	L	$F = \overline{AB}$	$F = A + \overline{B}$	$F = (A + \overline{B}) \text{ PLUS } 1$
L	L	H	H	$F = 0$	$F = \text{MINUS } 1 \text{ (2's COMPL)}$	$F = \text{ZERO}$
L	H	L	L	$F = \overline{AB}$	$F = A \text{ PLUS } \overline{AB}$	$F = A \text{ PLUS } \overline{AB} \text{ PLUS } 1$
L	H	L	H	$F = \overline{B}$	$F = (A + B) \text{ PLUS } \overline{AB}$	$F = (A + B) \text{ PLUS } \overline{AB} \text{ PLUS } 1$
L	H	H	L	$F = A \oplus B$	$F = A \text{ MINUS } B \text{ MINUS } 1$	$F = A \text{ MINUS } B$
L	H	H	H	$F = \overline{AB}$	$F = \overline{AB} \text{ MINUS } 1$	$F = \overline{AB}$
H	L	L	L	$F = \overline{A + B}$	$F = A \text{ PLUS } AB$	$F = A \text{ PLUS } AB \text{ PLUS } 1$
H	L	L	H	$F = A \oplus \overline{B}$	$F = A \text{ PLUS } B$	$F = A \text{ PLUS } B \text{ PLUS } 1$
H	L	H	L	$F = B$	$F = (A + \overline{B}) \text{ PLUS } AB$	$F = (A + \overline{B}) \text{ PLUS } AB \text{ PLUS } 1$
H	L	H	H	$F = AB$	$F = AB \text{ MINUS } 1$	$F = AB$
H	H	L	L	$F = 1$	$F = A \text{ PLUS } A^\dagger$	$F = A \text{ PLUS } A \text{ PLUS } 1$
H	H	L	H	$F = A + \overline{B}$	$F = (A + B) \text{ PLUS } A$	$F = (A + B) \text{ PLUS } A \text{ PLUS } 1$
H	H	H	L	$F = A + B$	$F = (A + \overline{B}) \text{ PLUS } A$	$F = (A + \overline{B}) \text{ PLUS } A \text{ PLUS } 1$
H	H	H	H	$F = A$	$F = A \text{ MINUS } 1$	$F = A$

† Each bit is shifted to the next more significant position.

logic diagram (positive logic)

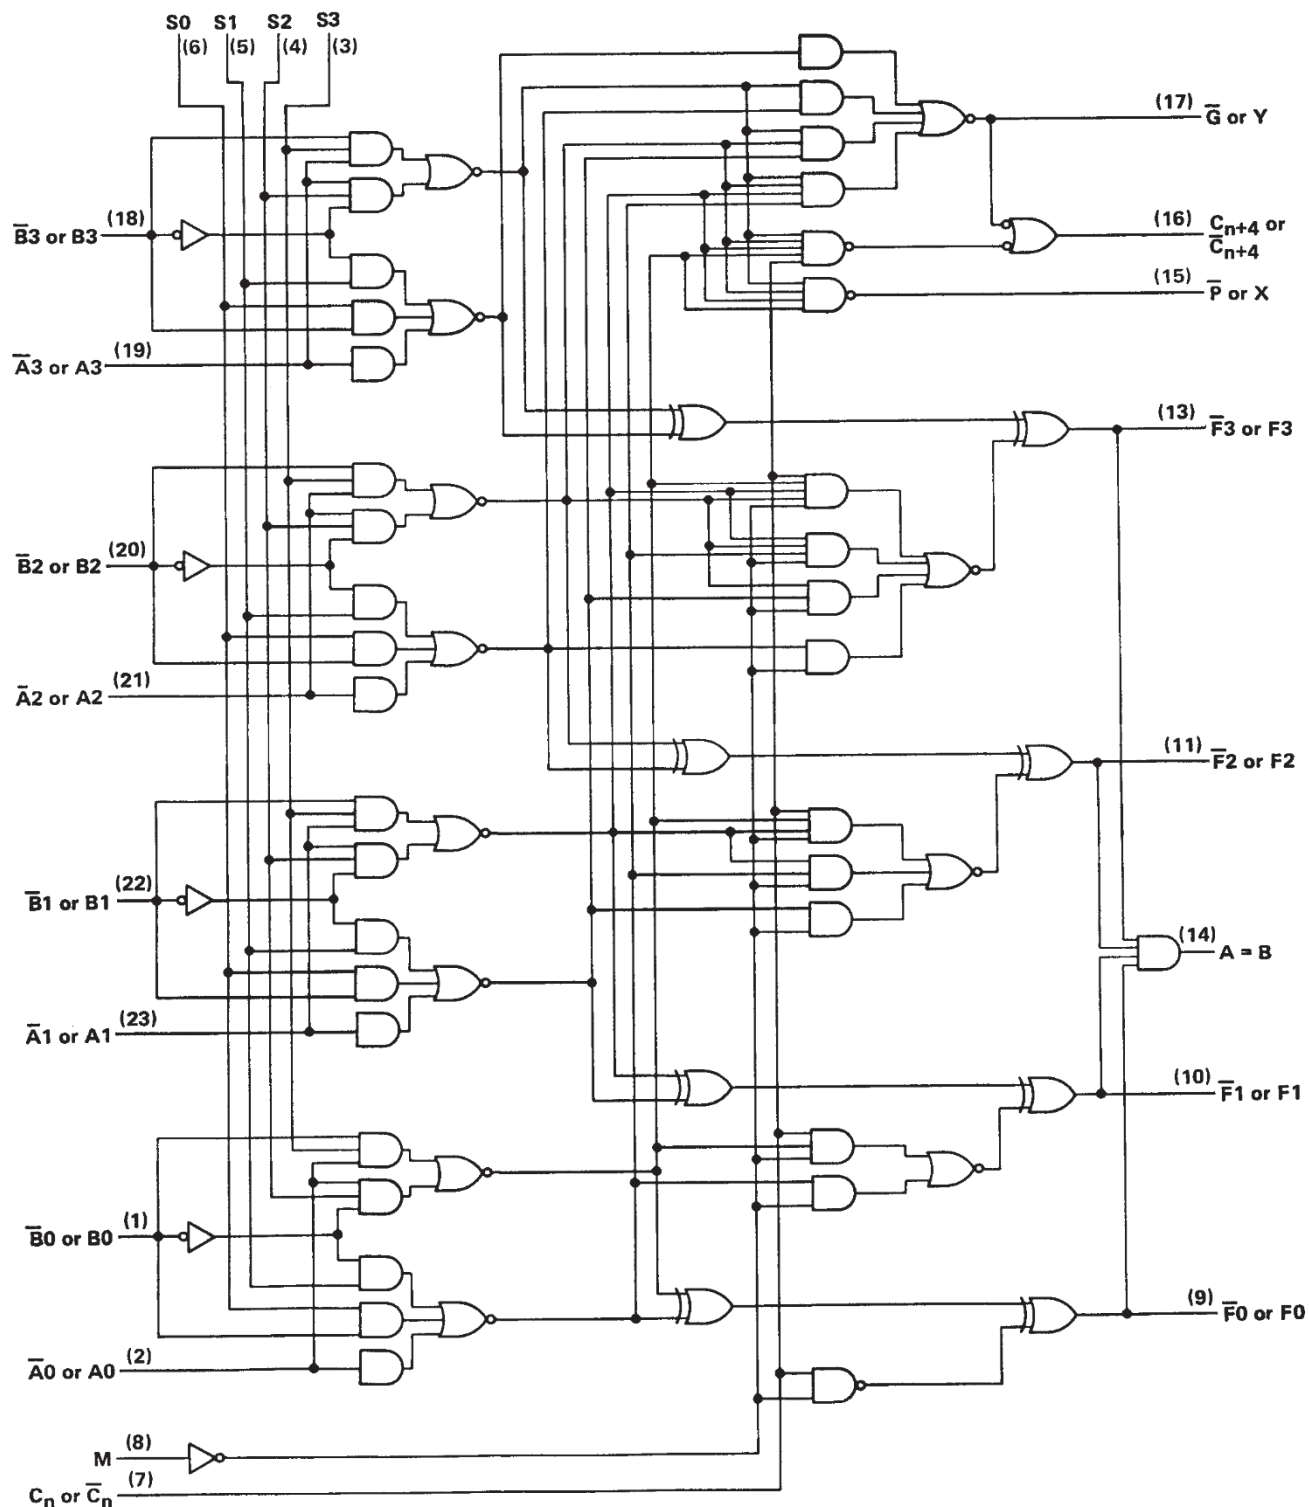

SN54LS181, SN54S181, SN74LS181,
SN74S181
ARITHMETISCH-LOGISCHE
EINHEITEN/FUNKTIONSGENERATOREN

SDLS136 - DEZEMBER 1972 - UBERARBEITET IM MARZ 1988

absolute maximum ratings over recommended operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	5.5 V
Interemitter voltage (see Note 2)	5.5 V
Operating free-air temperature range: SN54LS181	-55°C to 125°C
SN74LS181	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTES: 1. Voltage values, except interemitter voltage, are with respect to network ground terminal.

2. This is the voltage between two emitters of a multiple-emitter transistor. For this circuit, this rating applies to each $\bar{A}$ input in conjunction with inputs S2 or S3, and to each $\bar{B}$ input in conjunction with inputs S0 or S3.

recommended operating conditions

	SN54LS181			SN74LS181			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}	4.5	5	5.5	4.75	5	5.25	V
High-level output current, I_{OH} (All outputs except A = B)			-400			-400	μ A
Low-level output current, I_{OL}			4			8	mA
Operating free-air temperature, T_A	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS181		SN74LS181		UNIT	
				MIN	TYP‡	MAX	MIN		TYP‡
V _{IH}	High-level input voltage			2		2		V	
V _{IL}	Low-level input voltage			0.7		0.8		V	
V _{IK}	Input clamp voltage	V _{CC} = MIN, I _I = -18 mA		-1.5		-1.5		V	
V _{OH}	High-level output voltage, any output except A = B	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{IL} max, I _{OH} = -400 μA		2.5	3.4	2.7	3.4	V	
I _{OH}	High-level output current, A = B output only	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{IL} max, V _{OH} = 5.5 V		100		100		μA	
V _{OL}	Low-level output voltage	All outputs Output $\bar{G}$ Output P	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = V _{IL} max	I _{OL} = 4 mA	0.25	0.4	0.25	0.4	V
				I _{OL} = 8 mA			0.35	0.5	
				I _{OL} = 16 mA	0.47	0.7	0.47	0.7	
				I _{OL} = 8 mA	0.35	0.6	0.35	0.5	
I _I	Input current at max. input voltage	Mode input Any $\bar{A}$ or $\bar{B}$ input Any S input Carry input	V _{CC} = MAX, V _I = 5.5 V		0.1		0.1	mA	
					0.3		0.3		
					0.4		0.4		
					0.5		0.5		
I _{IH}	High-level input current	Mode input Any $\bar{A}$ or $\bar{B}$ input Any S input Carry input	V _{CC} = MAX, V _I = 2.7 V		20		20	μA	
					60		60		
					80		80		
					100		100		
I _{IL}	Low-level input current	Mode input Any $\bar{A}$ or $\bar{B}$ input Any S input Carry input	V _{CC} = MAX, V _I = 0.4 V		-0.4		-0.4	mA	
					-1.2		-1.2		
					-1.6		-1.6		
					-2		-2		
I _{OS}	Short-circuit output current, any output except A = B §	V _{CC} = MAX		-6	-40	-5	-42	mA	
I _{CC}	Supply current	V _{CC} = MAX, See Note 3	Condition A	20	32	20	34	mA	
			Condition B	21	35	21	37		

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

§ Not more than one output should be shorted at a time.

NOTE 3: With outputs open, I_{CC} is measured for the following conditions:

A. S0 through S3, M, and $\bar{A}$ inputs are at 4.5 V, all other inputs are grounded.

B. S0 through S3 and M are at 4.5 V, all other inputs are grounded.

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$, ($C_L = 15\text{ pF}$, $R_L = 2\text{ k}\Omega$, see note 4)




PARAMETER†	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	C_n	C_{n+4}		18	27		ns
t_{PHL}				13	20		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	C_{n+4}	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	25	38		ns
t_{PHL}				25	38		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	C_{n+4}	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	27	41		ns
t_{PHL}				27	41		
t_{PLH}	C_n	Any $\bar{F}$	$M = 0\text{ V}$ (SUM or DIFF mode)	17	26		ns
t_{PHL}				13	20		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{G}$	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	19	29		ns
t_{PHL}				15	23		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{G}$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	21	32		ns
t_{PHL}				21	32		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{F}$	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$, (SUM mode)	20	30		ns
t_{PHL}				20	30		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{F}$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	20	30		ns
t_{PHL}				22	33		
t_{PLH}	$\bar{A}_i$ or $\bar{B}_i$	$\bar{F}_i$	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	21	32		ns
t_{PHL}				13	20		
t_{PLH}	$\bar{A}_i$ or $\bar{B}_i$	$\bar{F}_i$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	21	32		ns
t_{PHL}				21	32		
t_{PLH}	$\bar{A}_i$ or $\bar{B}_i$	$\bar{F}_i$	$M = 4.5\text{ V}$ (logic mode)	22	33		ns
t_{PHL}				26	38		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$A = B$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	33	50		ns
t_{PHL}				41	62		

† t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

NOTE 4: Load circuits and voltage waveforms are shown in Section 1. Refer to Parameter Measurement Information page for test conditions.

schematics of inputs and outputs

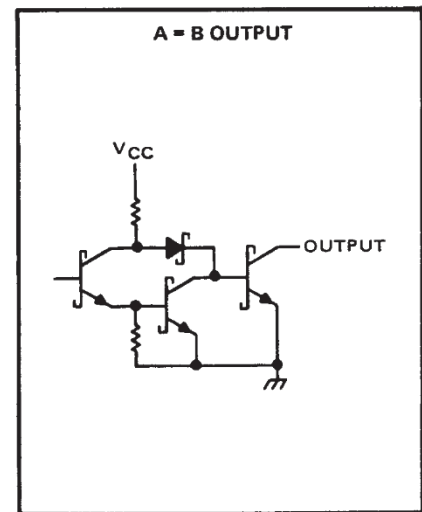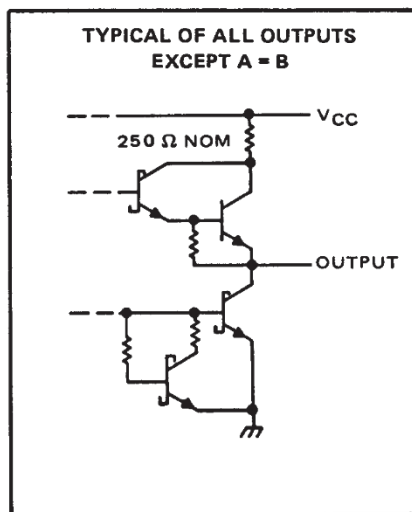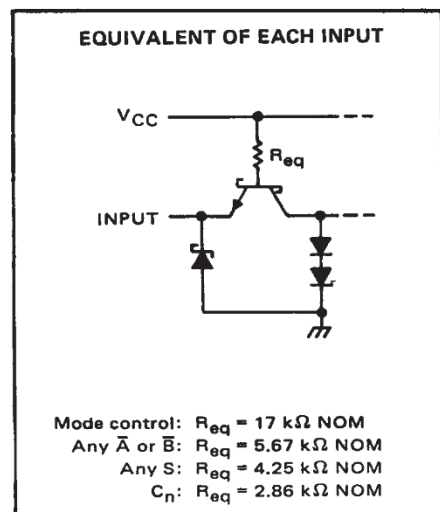

SN54LS181, SN54S181, SN74LS181,
SN74S181
ARITHMETISCH-LOGISCHE
EINHEITEN/FUNKTIONSGENERATOREN

SDLS136 - DEZEMBER 1972 - UBERARBEITET IM MARZ 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	5.5 V
Interemitter voltage (see Note 2)	5.5 V
Operating free-air temperature: SN54S181	-55°C to 125°C
SN74S181	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTES: 1. Voltage values, except interemitter voltage, are with respect to network ground terminal.
2. This is the voltage between two emitters of a multiple-emitter transistor. For this circuit, this rating applies to each $\bar{A}$ input in conjunction with inputs S2 or S3, and to each $\bar{B}$ input in conjunction with inputs S0 or S3.

recommended operating conditions

	SN54S181			SN74S181			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}	4.5	5	5.5	4.75	5	5.25	V
High-level output current, I_{OH} (All outputs except A = B)			-1			-1	mA
Low-level output current, I_{OL}			20			20	mA
Operating free-air temperature, T_A	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†	SN54S181			SN74S181			UNIT
			MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V_{IH}	High-level input voltage		2			2			V
V_{IL}	Low-level input voltage				0.8			0.8	V
V_{IK}	Input clamp voltage	$V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$			-1.2			-1.2	V
V_{OH}	High-level output voltage, any output except A = B	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = 0.8 \text{ V}, I_{OH} = -1 \text{ mA}$	2.5	3.4		2.7	3.4		V
I_{OH}	High-level output current, A = B output only	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = 0.8 \text{ V}, V_{OH} = 5.5 \text{ V}$			250			250	µA
V_{OL}	Low-level output voltage	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = 0.8 \text{ V}, I_{OL} = 20 \text{ mA}$			0.5			0.5	V
I_I	Input current at maximum input voltage	$V_{CC} = \text{MAX}, V_I = 5.5 \text{ V}$			1			1	mA
I_{IH}	High-level input current	Mode input			50			50	µA
		Any $\bar{A}$ or $\bar{B}$ input			150			150	
		Any S input			200			200	
		Carry input			250			250	
I_{IL}	Low-level input current	Mode input			-2			-2	mA
		Any $\bar{A}$ or $\bar{B}$ input			-6			-6	
		Any S input			-8			-8	
		Carry input			-10			-10	
I_{OS}	Short-circuit output current, any output except A = B §	$V_{CC} = \text{MAX}$	-40		-100	-40		-100	mA
I_{CC}	Supply current	$V_{CC} = \text{MAX}, T_A = 125^\circ\text{C},$ See Note 3			195				mA
		$V_{CC} = \text{MAX},$ See Note 3			120 220			120 220	

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

§ Not more than one output should be shorted at a time.

NOTE 3: I_{CC} is measured for the following conditions (the typical and maximum values apply to both):

A. S0 through S3, M, and $\bar{A}$ inputs are at 4.5 V, all other inputs are grounded, and all outputs are open.

B. S0 through S3 and M are at 4.5 V, all other inputs grounded, and all outputs are open.

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$ ($C_L = 15\text{ pF}$, $R_L = 280\ \Omega$, see note 4)




PARAMETER†	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	C_n	C_{n+4}		7	10.5		ns
t_{PHL}				7	10.5		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	C_{n+4}	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	12.5	18.5		ns
t_{PHL}				12.5	18.5		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	C_{n+4}	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	15.5	23		ns
t_{PHL}				15.5	23		
t_{PLH}	C_n	Any $\bar{F}$	$M = 0\text{ V}$ (SUM or DIFF mode)	7	12		ns
t_{PHL}				7	12		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{G}$	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	8	12		ns
t_{PHL}				7.5	12		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{G}$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	10.5	15		ns
t_{PHL}				10.5	15		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{P}$	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	7.5	12		ns
t_{PHL}				7.5	12		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$\bar{P}$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	10.5	15		ns
t_{PHL}				10.5	15		
t_{PLH}	$\bar{A}_i$ or $\bar{B}_i$	$\bar{F}_i$	$M = 0\text{ V}$, $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = 0\text{ V}$ (SUM mode)	11	16.5		ns
t_{PHL}				11	16.5		
t_{PLH}	$\bar{A}_i$ or $\bar{B}_i$	F_i	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	14	20		ns
t_{PHL}				14	22		
t_{PLH}	$\bar{A}_i$ or $\bar{B}_i$	$\bar{F}_i$	$M = 4.5\text{ V}$ (logic mode)	14	20		ns
t_{PHL}				14	22		
t_{PLH}	Any $\bar{A}$ or $\bar{B}$	$A = B$	$M = 0\text{ V}$, $S_0 = S_3 = 0\text{ V}$, $S_1 = S_2 = 4.5\text{ V}$ (DIFF mode)	15	23		ns
t_{PHL}				20	30		

† t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

NOTE 4: Load circuits and voltage waveforms are shown in Section 1. Refer to Parameter Measurement Information page for test conditions.

schematics of inputs and outputs

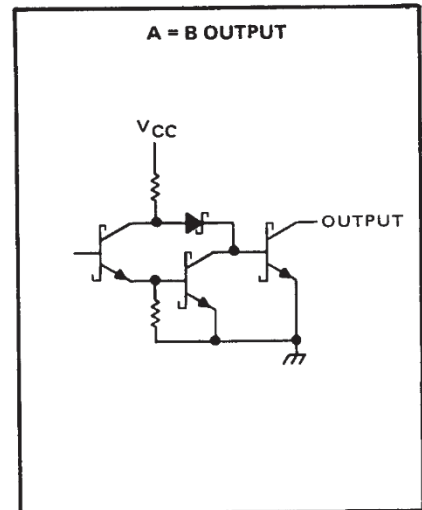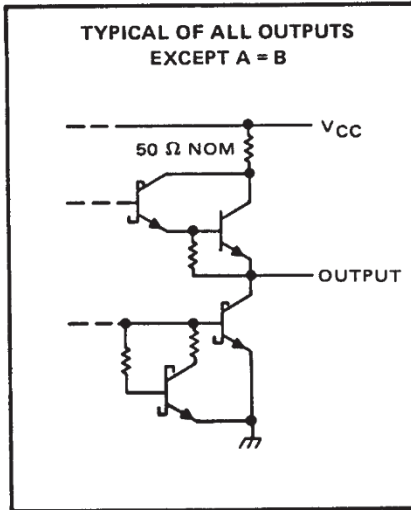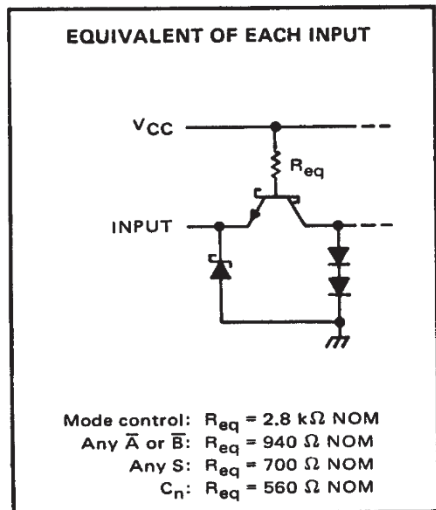

PARAMETER MEASUREMENT INFORMATION

SUM MODE TEST TABLE
FUNCTION INPUTS: $S_0 = S_3 = 4.5 \text{ V}$, $S_1 = S_2 = M = 0 \text{ V}$

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (See Note 4)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t_{PLH}	$\bar{A}_i$	$\bar{B}_i$	None	Remaining $\bar{A}$ and $\bar{B}$	C_n	$\bar{F}_i$	In-Phase
t_{PHL}	$\bar{B}_i$	$\bar{A}_i$	None	Remaining $\bar{A}$ and $\bar{B}$	C_n	$\bar{F}_i$	In-Phase
t_{PLH}	$\bar{A}_i$	$\bar{B}_i$	None	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{P}$	In-Phase
t_{PHL}	$\bar{B}_i$	$\bar{A}_i$	None	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{P}$	In-Phase
t_{PLH}	$\bar{A}_i$	None	$\bar{B}_i$	Remaining $\bar{B}$	Remaining $\bar{A}$, C_n	$\bar{G}$	In-Phase
t_{PHL}	$\bar{B}_i$	None	$\bar{A}_i$	Remaining $\bar{B}$	Remaining $\bar{A}$, C_n	$\bar{G}$	In-Phase
t_{PLH}	C_n	None	None	All $\bar{A}$	All $\bar{B}$	Any $\bar{F}$ or C_{n+4}	In-Phase
t_{PHL}	$\bar{A}_i$	None	$\bar{B}_i$	Remaining $\bar{B}$	Remaining $\bar{A}$, C_n	C_{n+4}	Out-of-Phase
t_{PLH}	$\bar{B}_i$	None	$\bar{A}_i$	Remaining $\bar{B}$	Remaining $\bar{A}$, C_n	C_{n+4}	Out-of-Phase

DIFF MODE TEST TABLE
FUNCTION INPUTS: $S_1 = S_2 = 4.5 \text{ V}$, $S_0 = S_3 = M = 0 \text{ V}$

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (See Note 4)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t_{PLH}	$\bar{A}_i$	None	$\bar{B}_i$	Remaining $\bar{A}$	Remaining $\bar{B}$, C_n	$\bar{F}_i$	In-Phase
t_{PHL}	$\bar{B}_i$	$\bar{A}_i$	None	Remaining $\bar{A}$	Remaining $\bar{B}$, C_n	$\bar{F}_i$	Out-of-Phase
t_{PLH}	$\bar{A}_i$	None	$\bar{B}_i$	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{P}$	In-Phase
t_{PHL}	$\bar{B}_i$	$\bar{A}_i$	None	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{P}$	Out-of-Phase
t_{PLH}	$\bar{A}_i$	$\bar{B}_i$	None	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{G}$	In-Phase
t_{PHL}	$\bar{B}_i$	None	$\bar{A}_i$	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{G}$	Out-of-Phase
t_{PLH}	$\bar{A}_i$	None	$\bar{B}_i$	Remaining $\bar{A}$	Remaining $\bar{B}$, C_n	$A = B$	In-Phase
t_{PHL}	$\bar{B}_i$	$\bar{A}_i$	None	Remaining $\bar{A}$	Remaining $\bar{B}$, C_n	$A = B$	Out-of-Phase
t_{PLH}	C_n	None	None	All $\bar{A}$ and $\bar{B}$	None	C_{n+4} or any $\bar{F}$	In-Phase
t_{PHL}	$\bar{A}_i$	$\bar{B}_i$	None	None	Remaining $\bar{A}$, $\bar{B}$, C_n	C_{n+4}	Out-of-Phase
t_{PLH}	$\bar{B}_i$	None	$\bar{A}_i$	None	Remaining $\bar{A}$, $\bar{B}$, C_n	C_{n+4}	In-Phase

LOGIC MODE TEST TABLE
FUNCTION INPUTS: $S_1 = S_2 = M = 4.5 \text{ V}$, $S_0 = S_3 = 0 \text{ V}$

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (See Note 4)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t_{PLH}	$\bar{A}_i$	$\bar{B}_i$	None	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{F}_i$	Out-of-Phase
t_{PHL}	$\bar{B}_i$	$\bar{A}_i$	None	None	Remaining $\bar{A}$ and $\bar{B}$, C_n	$\bar{F}_i$	Out-of-Phase

NOTE 4: Load circuits and voltage waveforms are shown in Section 1.

VERPACKUNGSGINFORMATIONEN

Bestellbare Teilenummer	Status (1)	Materialtyp (2)	Gehäuse Pins	Gehäuseanzahl Träger	RoHS (3)	Anschlussbeschichtung/Kugelmateriale (4)	MSL-Einstufung/Spitzen-Reflow-Temperatur (5)	Betriebstemperatur (°C)	Bauteilkennzeichnung (6)
JM38510/07801BJA	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	JM38510/07801BJA
JM38510/07801BJA.A	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	JM38510/07801BJA
M38510/07801BJA	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	JM38510/07801BJA
SN54LS181J	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	SN54LS181J
SN54LS181J.A	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	SN54LS181J
SNJ54LS181J	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	SNJ54LS181J
SNJ54LS181J.A	Aktiv	Produktion	CDIP (J) 24	15 RÖHRE	Nr.	Rufen Sie TI an	Nicht zutreffend für Verpackungstyp	-55 bis 125	SNJ54LS181J

⁽¹⁾ **Status:** Weitere Informationen zum Status finden Sie in unserem [Produktlebenszyklus](#).

⁽²⁾ **Materialtyp:** Sofern angegeben, handelt es sich bei Vorproduktionsteilen um Prototypen/Versuchsgeräte, die noch nicht für die Serienproduktion freigegeben sind. Test- und Endprozesse, einschließlich, aber nicht beschränkt auf Qualitätssicherung, Zuverlässigkeitsprüfungen und/oder Prozessqualifizierung, sind möglicherweise noch nicht abgeschlossen, und dieser Artikel unterliegt weiteren Änderungen oder einer möglichen Einstellung. Sofern bestellbar, unterliegen Käufe einer zusätzlichen Verzichtserklärung an der Kasse und sind ausschließlich für frühe interne Evaluierungszwecke bestimmt. Diese Artikel werden ohne jegliche Gewährleistung verkauft.

⁽³⁾ **RoHS-Werte:** Ja, Nein, RoHS-ausgenommen. Weitere Informationen und die Definition der Werte finden Sie in der [TI-RoHS-Erklärung](#).

⁽⁴⁾ **Anschlussbeschichtung/Kugelmateriale:** Bauteile können mehrere Optionen für die Materialbeschichtung aufweisen. Die Beschichtungsoptionen sind durch eine vertikale Linie voneinander getrennt. Die Werte für Anschlussbeschichtung/Kugelmateriale können auf zwei Zeilen umgebrochen werden, wenn der Wert die maximale Spaltenbreite überschreitet.

⁽⁵⁾ **MSL-Einstufung/Spitzen-Reflow-Temperatur:** Die Einstufungen der Feuchtigkeitsempfindlichkeit und die Spitzen-Löt- (Reflow-)Temperaturen. Falls ein Bauteil mehrere Feuchtigkeitsempfindlichkeitsstufen aufweist, wird nur die niedrigste Stufe gemäß JEDEC-Standards angezeigt. Die tatsächliche Reflow-Temperatur, die für die Montage des Bauteils auf der Leiterplatte verwendet wird, entnehmen Sie bitte dem Versandetikett.

⁽⁶⁾ **Bauteilkennzeichnung:** Es kann eine zusätzliche Kennzeichnung vorhanden sein, die sich auf das Logo, die Informationen zum Chargenverfolgungscode oder die Umweltkategorie des Bauteils bezieht.

Mehrere Bauteilkennzeichnungen werden in Klammern gesetzt. Auf einem Bauteil erscheint nur eine der in Klammern stehenden und durch ein „~“ getrennten Bauteilkennzeichnungen. Ist eine Zeile eingerückt, handelt es sich um eine Fortsetzung der vorherigen Zeile, und beide zusammen bilden die vollständige Bauteilkennzeichnung für dieses Bauteil.

Wichtige Informationen und Haftungsausschluss: Die auf dieser Seite bereitgestellten Informationen entsprechen dem Kenntnisstand und der Überzeugung von TI zum Zeitpunkt ihrer Veröffentlichung. TI stützt sich dabei auf Informationen von Dritten und übernimmt keine Gewähr für die Richtigkeit dieser Informationen. Es werden Anstrengungen unternommen, um Informationen von Dritten besser zu integrieren. TI hat angemessene Maßnahmen ergriffen und ergreift diese auch weiterhin, um repräsentative Informationen bereitzustellen


und korrekte Informationen, hat jedoch möglicherweise keine zerstörenden Prüfungen oder chemischen Analysen an eingehenden Materialien und Chemikalien durchgeführt. TI und die Lieferanten von TI betrachten bestimmte Informationen als urheberrechtlich geschützt, weshalb CAS-Nummern und andere eingeschränkte Informationen möglicherweise nicht zur Veröffentlichung freigegeben werden können.

In keinem Fall übersteigt die Haftung von TI, die sich aus solchen Informationen ergibt, den jährlichen Gesamtkaufpreis der in diesem Dokument genannten TI-Teile, die TI an den Kunden verkauft hat.

J (R-GDIP-T**)

KERAMISCHES DUAL-IN-LINE-GEHÄUSE

24 PINS ABGEBILDET

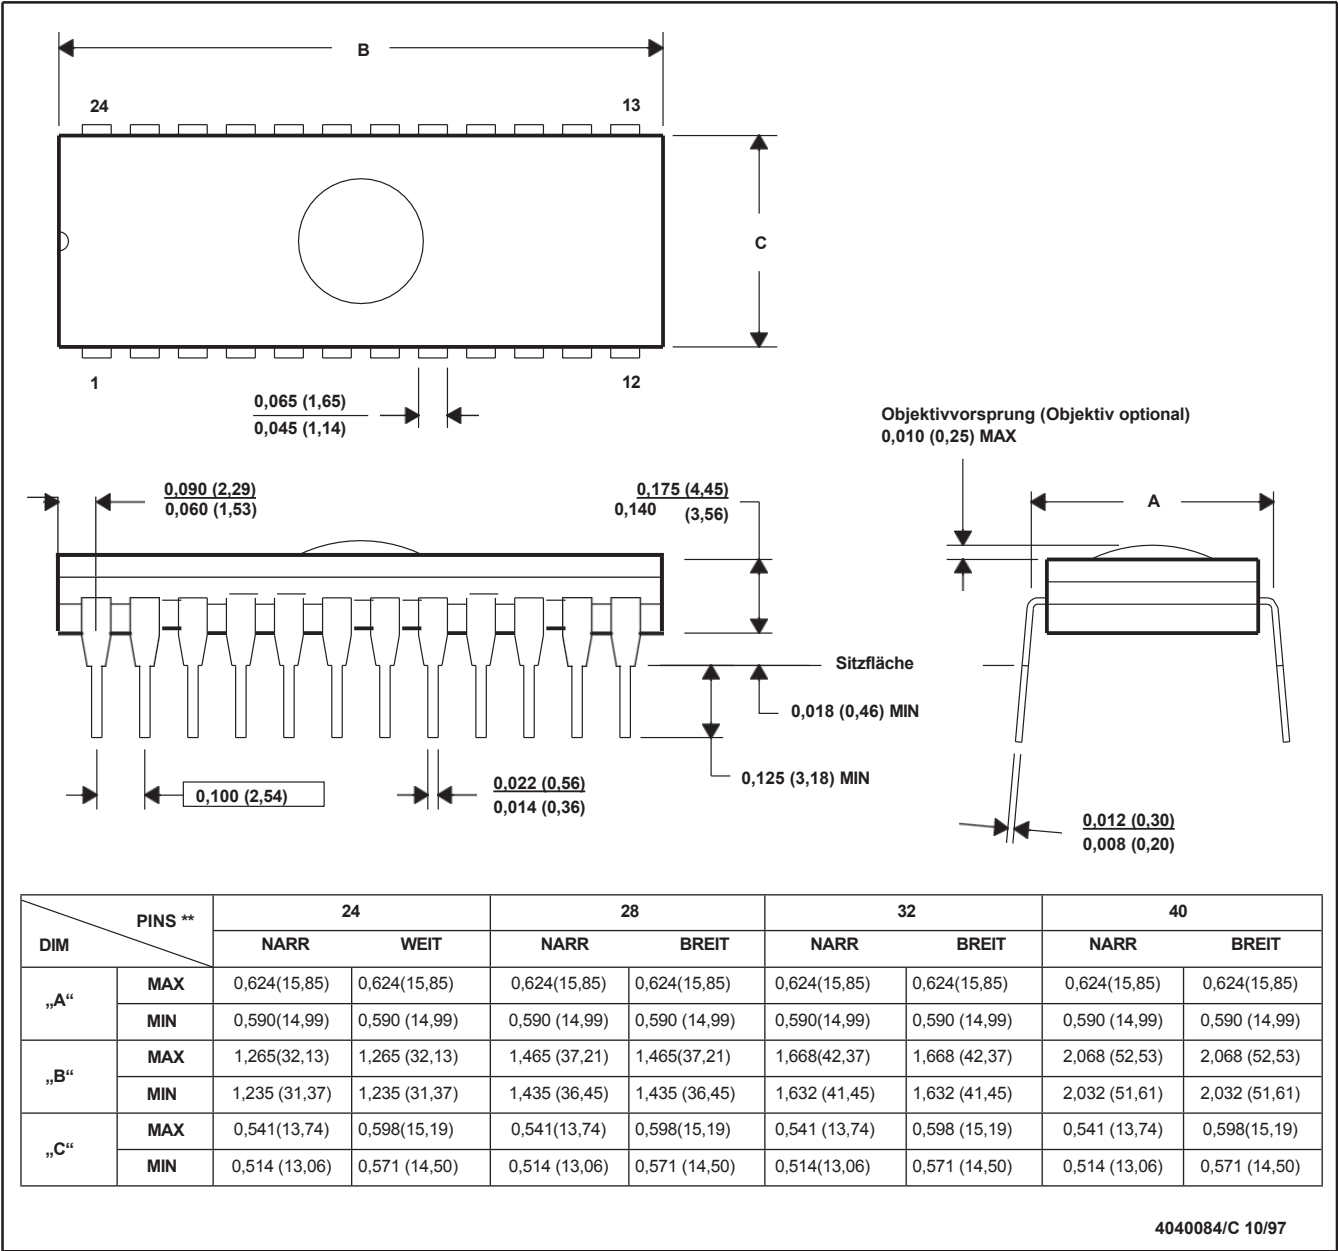

- HINWEISE: A. Alle linearen Maße sind in Zoll (Millimeter) angegeben.
- B. Diese Zeichnung kann ohne vorherige Ankündigung geändert werden.
- C. Fenster (Linse) wurde dieser Gehäusegruppe hinzugefügt (24-, 28-, 32-, 40-polig).
- D. Dieses Gehäuse kann mit einem Keramikdeckel unter Verwendung von Glasfritte hermetisch versiegelt werden.
- E. Zur Identifizierung der Anschlüsse ist auf der Kappe ein Indexpunkt vorgesehen.

WICHTIGER HINWEIS UND HAFTUNGSAUSSCHLUSS

TI STELLT TECHNISCHE DATEN UND DATEN ZUR ZUVERLÄSSIGKEIT (EINSCHLIESSLICH DATENBLÄTTER), ENTWURFSRESSOURCEN (EINSCHLIESSLICH REFERENZENTWÜRFE), ANWENDUNGS- ODER SONSTIGE ENTWURFSEMPFEHLUNGEN, WEB-TOOLS, SICHERHEITSINFORMATIONEN UND ANDERE RESSOURCEN „WIE BESEHEN“ UND MIT ALLEN FEHLERN UND LEHNT JEGLICHE AUSDRÜCKLICHE ODER STILLSCHWEIGENDE GEWÄHRLEISTUNG AB, EINSCHLIESSLICH, ABER NICHT BESCHRÄNKT AUF STILLSCHWEIGENDE GEWÄHRLEISTUNGEN DER MARKTGÄNGIGKEIT, DER EIGNUNG FÜR EINEN BESTIMMTEN ZWECK ODER DER NICHTVERLETZUNG VON GEISTIGEN EIGENTUMSRECHTEN DRITTER.

Diese Ressourcen sind für erfahrene Entwickler bestimmt, die mit TI-Produkten arbeiten. Sie sind allein verantwortlich für (1) die Auswahl der für Ihre Anwendung geeigneten TI-Produkte, (2) die Entwicklung, Validierung und Prüfung Ihrer Anwendung sowie (3) die Sicherstellung, dass Ihre Anwendung den geltenden Normen sowie allen sonstigen Sicherheits-, Regulierungs- oder sonstigen Anforderungen entspricht.

Diese Ressourcen können ohne vorherige Ankündigung geändert werden. TI gewährt Ihnen die Erlaubnis, diese Ressourcen ausschließlich für die Entwicklung einer Anwendung zu nutzen, die die in der Ressource beschriebenen TI-Produkte verwendet. Jede andere Vervielfältigung und Darstellung dieser Ressourcen ist untersagt. Es wird keine Lizenz für sonstige geistige Eigentumsrechte von TI oder für geistige Eigentumsrechte Dritter gewährt. TI lehnt jede Haftung ab, und Sie stellen TI und seine Vertreter von allen Ansprüchen, Schäden, Kosten, Verlusten und Verbindlichkeiten frei, die sich aus Ihrer Nutzung dieser Ressourcen ergeben.

Die Produkte von TI werden gemäß [den Verkaufsbedingungen von TI](#), [den Allgemeinen Qualitätsrichtlinien von TI](#) oder anderen geltenden Bedingungen bereitgestellt, die entweder auf [ti.com](#) verfügbar sind oder in Verbindung mit diesen TI-Produkten bereitgestellt werden. Die Bereitstellung dieser Ressourcen durch TI erweitert oder ändert in keiner Weise die geltenden Gewährleistungen oder Gewährleistungsausschlüsse von TI für TI-Produkte. Sofern TI ein Produkt nicht ausdrücklich als kundenspezifisch oder nach Kundenspezifikation bezeichnet, handelt es sich bei TI-Produkten um Standardgeräte für allgemeine Zwecke aus dem Katalog.

TI lehnt alle zusätzlichen oder abweichenden Bedingungen, die Sie möglicherweise vorschlagen, ab.

Copyright © 2025, Texas Instruments Incorporated Zuletzt

aktualisiert 10/2025