LMC7101

Low-Power Operational Amplifier

General Description

The LMC7101 is a high-performance, low-power, operational amplifier which is pin-for-pin compatible with the National Semiconductor LMC7101. It features rail-to-rail input and output performance in Micrel's IttyBitty™ SOT-23-5 package.

The LMC7101 is a 500kHz gain bandwidth amplifier designed to operate from 2.7V to 12V single-ended power supplies with guaranteed performance at supply voltages of 2.7V, 3V, 5V, and 12V.

This op amp's input common-mode range includes ground and extends 300mV beyond the supply rails. For example, the common-mode range is –0.3V to +5.3V with a 5V supply.

Features

- Small footprint SOT-23-5 package
- Guaranteed 2.7V, 3V, 5V, and 12V performance
- 500kHz gain-bandwidth
- 0.01% total harmonic distortion at 10kHz (5V, 2kΩ)
- 0.5mA typical supply current at 5V
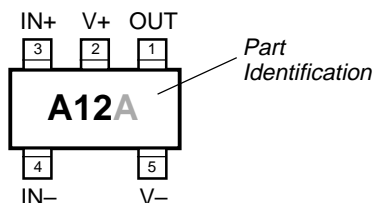
Applications

- Mobile communications, cellular phones, pagers
- Battery-powered instrumentation
- PCMCIA, USB
- Portable computers and PDAs

Ordering Information

Part Number	Marking	Grade	Temperature Range	Package
LMC7101AIM5	A12A	Prime	–40°C to +85°C	SOT-23-5
LMC7101BIM5	A12	Standard	–40°C to +85°C	SOT-23-5

Pin Configuration

Functional Configuration

SOT-23-5 (M5)

Pin Description

Pin Number	Pin Name	Pin Function
1	OUT	Amplifier Output
2	V+	Positive Supply
3	IN+	Noninverting Input
4	IN–	Inverting Input
5	V–	Negative Supply: Negative supply for split supply application or ground for single supply application.

Absolute Maximum Ratings (Note 1)

Supply Voltage ($V_{V+} - V_{V-}$) 15V
Differential Input Voltage ($V_{IN+} - V_{IN-}$) .... $\pm(V_{V+} - V_{V-})$
I/O Pin Voltage (V_{IN}, V_{OUT}), **Note 2**
.... V_{V+} + 0.3V to V_{V-} − 0.3V
Junction Temperature (T_J) .... +150°C
Storage Temperature .... −65°C to +150°C
Lead Temperature (soldering, 10 sec.) .... 260°C
ESD, **Note 5** 2kV

Operating Ratings (Note 1)

Supply Voltage ($V_{V+} - V_{V-}$) .... 2.7V to 12V
Ambient Temperature (T_A) .... −40°C to +85°C
Junction Temperature (T_J) .... −40°C to +125°C
Max. Junction Temperature ($T_{J(max)}$), **Note 3** .... +125°C
Package Thermal Resistance (θ_{JA}), **Note 4** .... 325°C/W
Max. Power Dissipation .... **Note 3**

Electrical Characteristics (2.7V)

V+ = +2.7V, V− = 0V, V_{CM} = V_{OUT} = V+/2; R_L = 1MΩ; T_J = 25°C, **bold** values indicate −40°C ≤ T_J ≤ +85°C; unless noted

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
V_{OS}	Input Offset Voltage		0.11		6		9	mV
TCV_{OS}	Input Offset Voltage Average Drift		1.0					µV/°C
I_B	Input Bias Current		1.0		**64**		**64**	pA
I_{OS}	Input Offset Current		0.5		**32**		**32**	pA
R_{IN}	Input Resistance		>1					TΩ
CMRR	Common-Mode Rejection Ratio	0V ≤ V_{CM} ≤ 2.7V, **Note 6**	70	50		50		dB
V_{CM}	Input Common-Mode Voltage	input low, CMRR ≥ 50dB	−0.3		0.0		0.0	V
		input high, CMRR ≥ 50dB	3.0	2.7		2.7		V
PSRR	Power Supply Rejection Ratio	V+ = 1.35V to 1.65V, V− = −1.35V to −1.65V, V_{CM} = 0	60	50		45		dB
C_{IN}	Common-Mode Input Capacitance		3					pF
V_O	Output Swing	output high, R_L = 10k	2.699	2.64		2.64		V
		output low, R_L = 10k	0.001		0.06		0.06	V
		output high, R_L = 2k	2.692	2.6		2.6		V
		output low, R_L = 2k	0.008		0.1		0.1	V
I_S	Supply Current	V_{OUT} = V+/2	0.5		0.81 **0.95**		0.81 **0.95**	mA mA
SR	Slew Rate		0.4					V/µs
GBW	Gain-Bandwidth Product		0.5					MHz

Electrical Characteristics (3.0V)

V+ = +3.0V, V− = 0V, V_{CM} = V_{OUT} = V+/2; R_L = 1MΩ; T_J = 25°C, **bold** values indicate −40°C ≤ T_J ≤ +85°C; unless noted

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
V_{OS}	Input Offset Voltage		0.11		4 **6**		7 **9**	mV mV
TCV_{OS}	Input Offset Voltage Average Drift		1.0					µV/°C
I_B	Input Bias Current		1.0		**64**		**64**	pA
I_{OS}	Input Offset Current		0.5		**32**		**32**	pA
R_{IN}	Input Resistance		>1					TΩ

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
CMRR	Common-Mode Rejection Ratio	$0V \leq V_{CM} \leq 3.0V$, **Note 6**	74	60		60		dB
V_{CM}	Input Common-Mode Voltage	input low, CMRR $\geq$ 50dB	−0.3		0		0	V
		input high, CMRR $\geq$ 50dB	3.3	3.0		3.0		V
PSRR	Power Supply Rejection Ratio	V+ = 1.5V to 6.0V, V− = −1.5V to −6.0V, V_{CM} = 0	80	68		60		dB
C_{IN}	Common-Mode Input Capacitance		3					pF
V_{OUT}	Output Swing	output high, R_L = 2k	2.992	2.9		2.9		V
		output low, R_L = 2k	0.008		0.1		0.1	V
		output high, R_L = 600Ω	2.973	2.85		2.85		V
		output low, R_L = 600Ω	0.027		0.15		0.15	V
I_S	Supply Current		0.5		0.81 **0.95**		0.81 **0.95**	mA mA

Electrical Characteristics—DC (5V)

V+ = +5.0V, V− = 0V, V_{CM} = 1.5V, V_{OUT} = V+/2; R_L = 1MΩ; T_J = 25°C, **bold** values indicate −40°C $\leq T_J \leq$ +85°C; unless noted

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
V_{OS}	Input Offset Voltage		0.11		3 **5**		7 **9**	mV mV
TCV_{OS}	Input Offset Voltage Average Drift		1.0					μV/°C
I_B	Input Bias Current		1.0		**64**		**64**	pA
I_{OS}	Input Offset Current		0.5		**32**		**32**	pA
R_{IN}	Input Resistance		>1					TΩ
CMRR	Common-Mode Rejection Ratio	$0V \leq V_{CM} \leq 5V$, **Note 6**	82	60 **55**		60 **55**		dB dB
V_{CM}	Input Common-Mode Voltage	input low, CMRR $\geq$ 50dB	−0.3		−0.20 **0.00**		−0.20 **0.00**	V V
		input high, CMRR $\geq$ 50dB	5.3	5.20 **5.00**		5.20 **5.00**		V V
+PSRR	Positive Power Supply Rejection Ratio	V+ = 5V to 12V, V− = 0V, V_{OUT} = 1.5V	82	70 **65**		65 **62**		dB dB
−PSRR	Negative Power Supply Rejection Ratio	V+ = 0V, V− = −5V to −12V, V_{OUT} = −1.5V	82	70 **65**		65 **62**		dB dB
C_{IN}	Common-Mode Input Capacitance		3					pF
V_{OUT}	Output Swing	output high, R_L = 2k	4.989	4.9 **4.85**		4.9 **4.85**		V V
		output low, R_L = 2k	0.011		0.1 **0.15**		0.1 **0.15**	V V
		output high, R_L = 600Ω	4.963	4.9 **4.8**		4.9 **4.8**		V V
		output low, R_L = 600Ω	0.037		0.1 **0.2**		0.1 **0.2**	V V
I_{SC}	Output Short Circuit Current **Note 7**	sourcing (V_{OUT} = 0V) or sinking (V_{OUT} = 5V)	200	120 **80**		120 **80**		mA mA
I_S	Supply Current	V_{OUT} = V+/2	0.5		0.85 **1.0**		0.85 **1.0**	mA mA

Electrical Characteristics—DC (12V)

V+ = +12V, V− = 0V, V_{CM} = 1.5V, V_{OUT} = V+/2; R_L = 1MΩ; T_J = 25°C, **bold** values indicate −40°C ≤ T_J ≤ +85°C; unless noted

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
V_{OS}	Input Offset Voltage		0.11		6		9	mV
TCV_{OS}	Input Offset Voltage Average Drift		1.0					µV/°C
I_B	Input Bias Current		1.0		**64**		**64**	pA
I_{OS}	Input Offset Current		0.5		**32**		**32**	pA
R_{IN}	Input Resistance		>1					TΩ
CMRR	Common-Mode Rejection Ratio	0V ≤ V_{CM} ≤ 12V, **Note 6**	82	65 **60**		65 **60**		dB dB
V_{CM}	Input Common-Mode Voltage	input low, V+ = 12V, CMRR ≥ 50dB	−0.3		−0.20 **0.00**		−0.20 **0.00**	V V
		input high, V+ = 12V, CMRR ≥ 50dB	12.3	12.2 **12.0**		12.2 **12.0**		V V
+PSRR	Positive Power Supply Rejection Ratio	V+ = 5V to 12V, V− = 0V, V_{OUT} = 1.5V	82	70 **65**		65 **62**		dB dB
−PSRR	Negative Power Supply Rejection Ratio	V+ = 0V, V− = −5V to −12V, V_{OUT} = −1.5V	82	70 **65**		65 **62**		dB dB
A_V	Large Signal Voltage Gain	sourcing or sinking, R_L = 2k, **Note 9**	340	80 **40**		80 **40**		V/mV V/mV
		sourcing or sinking, R_L = 600Ω, **Note 9**	300	15 **10**		15 **10**		V/mV V/mV
C_{IN}	Common-Mode Input Capacitance		3					pF
V_{OUT}	Output Swing	output high, V+ = 12V, R_L = 2k	11.98	11.9 **11.87**		11.9 **11.87**		V V
		output low, V+ = 12V, R_L = 2k,	0.02		0.10 **0.13**		0.10 **0.13**	V V
		output high, V+ = 12V, R_L = 600Ω	11.93	11.73 **11.65**		11.73 **11.65**		V V
		output low, V+ = 12V, R_L = 600Ω	0.07		0.27 **0.35**		0.27 **0.35**	V V
I_{SC}	Output Short Circuit Current	sourcing (V_{OUT} = 0V) or sinking (V_{OUT} = 12V), **Notes 7, 8**	300	200 **120**		200 **120**		mA mA
I_S	Supply Current	V_{OUT} = V+/2	0.8		1.5 **1.71**		1.5 **1.71**	mA mA

Electrical Characteristics—AC (5V)

V+ = 5V, V− = 0V, V_{CM} = 1.5V, V_{OUT} = V+/2; R_L = 1MΩ; T_J = 25°C, **bold** values indicate −40°C ≤ T_J ≤ +85°C; unless noted

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
THD	Total Harmonic Distortion	f = 10kHz, A_V = −2, R_L = 2kΩ, V_{OUT} = 4.0 V_{PP}	0.01					%
SR	Slew Rate		0.3					V/μs
GBW	Gain-Bandwidth Product		0.5					MHz

Electrical Characteristics—AC (12V)

V+ = 12V, V− = 0V, V_{CM} = 1.5V, V_{OUT} = V+/2; R_L = 1MΩ; T_J = 25°C, **bold** values indicate −40°C ≤ T_J ≤ +85°C; unless noted

Symbol	Parameter	Condition	Typ	LMC7101A Min	LMC7101A Max	LMC7101B Min	LMC7101B Max	Units
THD	Total Harmonic Distortion	f = 10kHz, A_V = −2, R_L = 2k, V_{OUT} = 8.5 V_{PP}	0.01					%
SR	Slew Rate	V+ = 12V, **Note 10**	0.3	0.19 **0.15**		0.19 **0.15**		V/μs V/μs
GBW	Gain-Bandwidth Product		0.5					MHz
ϕ_m	Phase Margin		45					°
G_m	Gain Margin		10					dB
e_n	Input-Referred Voltage Noise	f = 1kHz, V_{CM} = 1V	37					nV/√Hz
i_n	Input-Referred Current Noise	f = 1kHz	1.5					fA/√Hz

General Notes: Devices are ESD protected; however, handling precautions are recommended. All limits guaranteed by testing on statistical analysis.

Note 1. Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside its recommended operating ratings.

Note 2. I/O Pin Voltage is any external voltage to which an input or output is referenced.

Note 3. The maximum allowable power dissipation is a function of the maximum junction temperature, $T_{J(max)}$; the junction-to-ambient thermal resistance, θ_{JA}; and the ambient temperature, T_A. The maximum allowable power dissipation at any ambient temperature is calculated using: $P_D = (T_{J(max)} - T_A) \div \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature.

Note 4. Thermal resistance, θ_{JA}, applies to a part soldered on a printed-circuit board.

Note 5. Human body model, 1.5k in series with 100pF.

Note 6. Common-mode performance tends to follow the typical value. Minimum value limits reflect performance only near the supply rails.
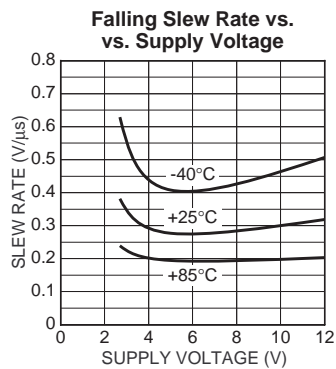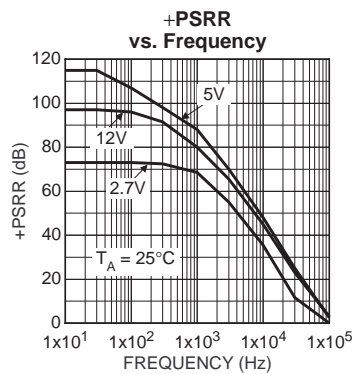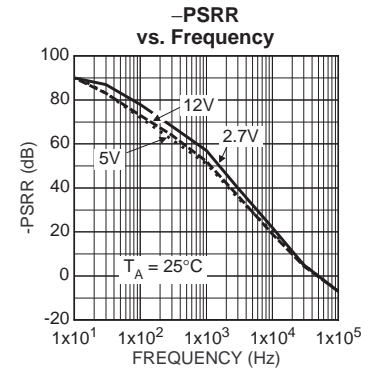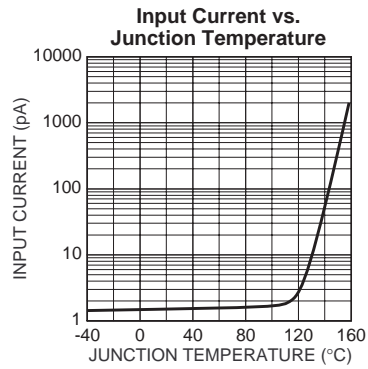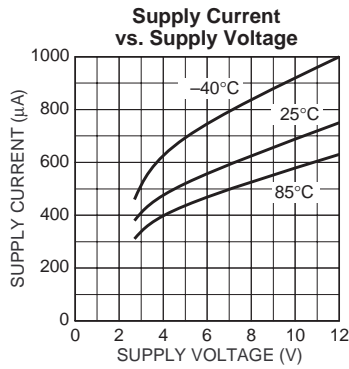
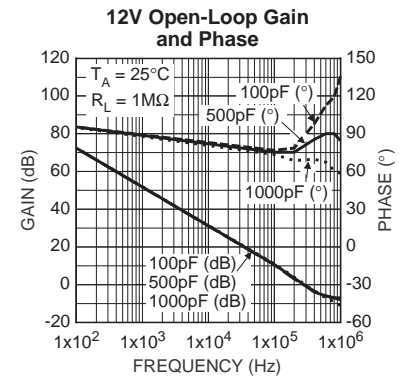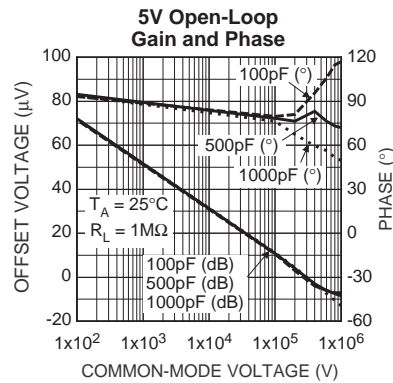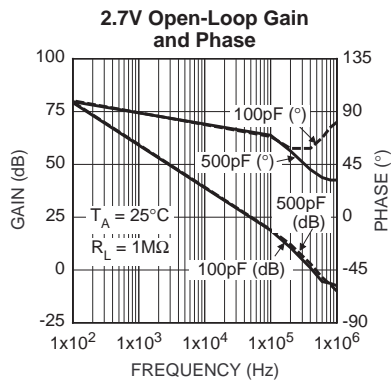**Note 7.** Continuous short circuit may exceed absolute maximum T_J under some conditions.
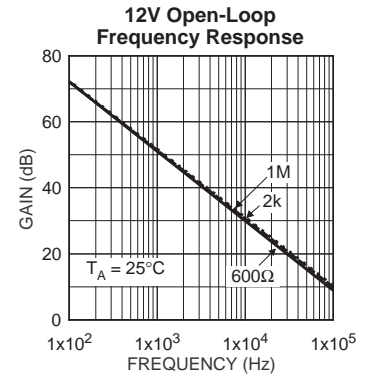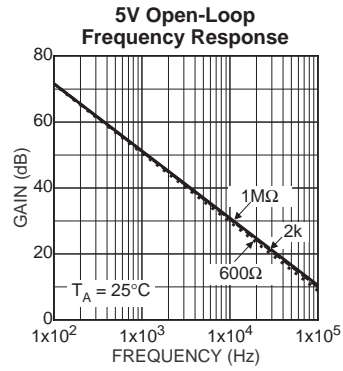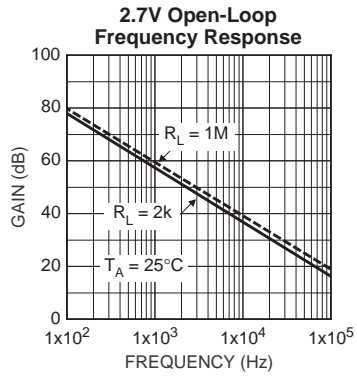
Note 8. Shorting OUT to V+ when V+ > 12V may damage the device.

Note 9. R_L connected to 5.0V. Sourcing: 5V ≤ V_{OUT} ≤ 12V. Sinking: 2.5V ≤ V_{OUT} ≤ 5V.

Note 10. Device connected as a voltage follower with a 12V step input. The value is the positive or negative slew rate, whichever is slower.
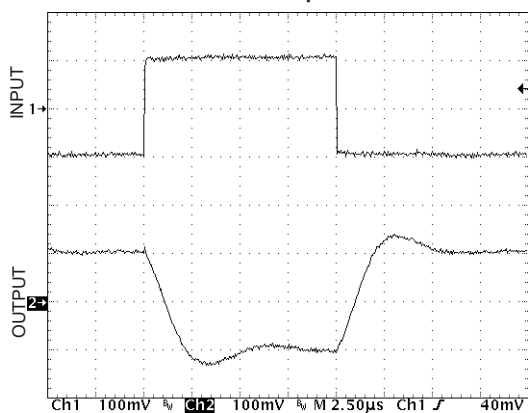
Typical Characteristics

**Supply Current
vs. Supply Voltage**

**Input Current vs.
Junction Temperature**

**−PSRR
vs. Frequency**

**+PSRR
vs. Frequency**

**CMRR
vs. Frequency**

**Sink / Source Currents
vs. Output Voltage**

**Falling Slew Rate vs.
vs. Supply Voltage**

**Rising Slew Rate vs.
vs. Supply Voltage**

**Offset Voltage
vs. Supply Voltage**

**Phase Margin
vs. Capacitive Load**

**2.7V Open-Loop
Frequency Response**

**5V Open-Loop
Frequency Response**

**12V Open-Loop
Frequency Response**

**2.7V Open-Loop Gain
and Phase**

**5V Open-Loop
Gain and Phase**

**12V Open-Loop Gain
and Phase**

Functional Characteristics

**Inverting Small-Signal
Pulse Response**

**Inverting Large-Signal
Pulse Response**
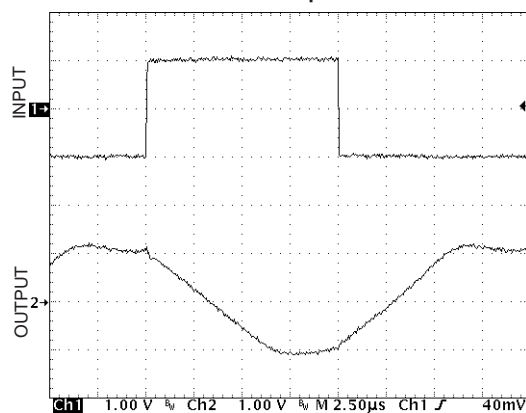
**Noninverting Small-Signal
Pulse Response**
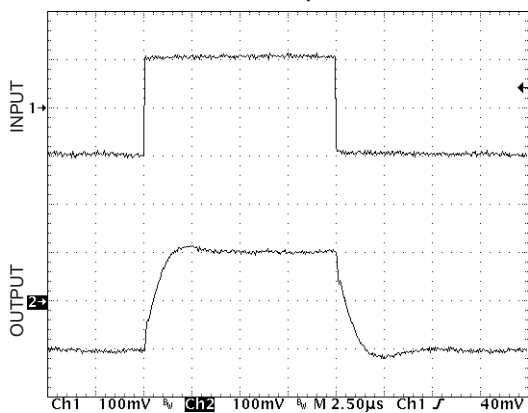
**Noninverting Large-Signal
Pulse Response**
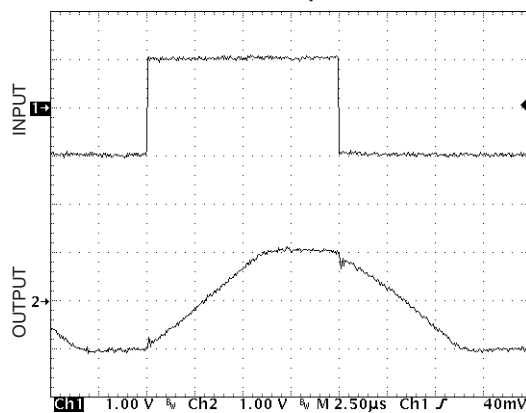
Input Voltage Noise vs. Frequency
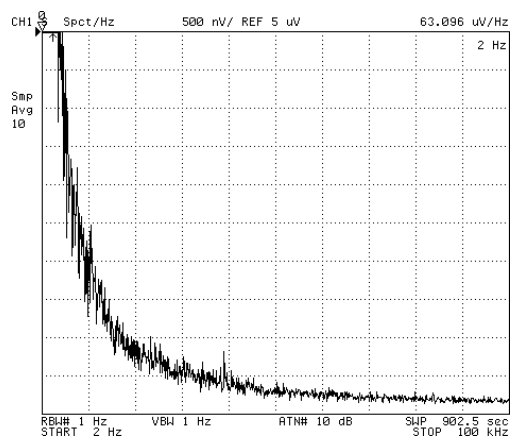
Application Information

Input Common-Mode Voltage

Some amplifiers exhibit undesirable or unpredictable performance when the inputs are driven beyond the common-mode voltage range, for example, phase inversion of the output signal. The LMC7101 tolerates input overdrive by at least 200mV beyond either rail without producing phase inversion.

If the absolute maximum input voltage (700mV beyond either rail) is exceeded, the input current should be limited to ±5mA maximum to prevent reducing reliability. A 10kΩ series input resistor, used as a current limiter, will protect the input structure from voltages as large as 50V above the supply or below ground. See Figure 1.
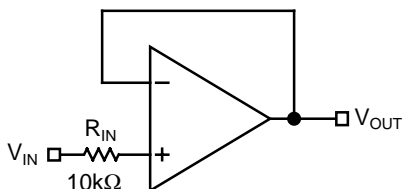
Figure 1. Input Current-Limit Protection

Output Voltage Swing

Sink and source output resistances of the LMC7101 are equal. Maximum output voltage swing is determined by the load and the approximate output resistance. The output resistance is:

$$R_{OUT} = \frac{V_{DROP}}{I_{LOAD}}$$

V_{DROP} is the voltage dropped within the amplifier output stage. V_{DROP} and I_{LOAD} can be determined from the V_O (output swing) portion of the appropriate Electrical Characteristics table. I_{LOAD} is equal to the typical output high voltage minus V+/2 and divided by R_{LOAD}. For example, using the Electrical Characteristics DC (5V) table, the typical output high voltage using a 2kΩ load (connected to V+/2) is 4.989V, which produces an I_{LOAD} of

$$1.245mA \left(\frac{4.989V - 2.5V}{2k\Omega} \right) = 1.245mA.$$

Voltage drop in the amplifier output stage is:

$$V_{DROP} = 5.0V - 4.989V$$

$$V_{DROP} = 0.011V$$

Because of output stage symmetry, the corresponding typical output low voltage (0.011V) also equals V_{DROP}. Then:

$$R_{OUT} = \frac{0.011V}{0.001245A} = 8.8 \approx 9\Omega$$

Driving Capacitive Loads

Driving a capacitive load introduces phase-lag into the output signal, and this in turn reduces op-amp system phase margin. The application that is least forgiving of reduced phase margin is a unity gain amplifier. The LMC7101 can typically drive a 100pF capacitive load connected directly to the output when configured as a unity-gain amplifier.

Using Large-Value Feedback Resistors

A large-value feedback resistor (> 500kΩ) can reduce the phase margin of a system. This occurs when the feedback resistor acts in conjunction with input capacitance to create phase lag in the fedback signal. Input capacitance is usually a combination of input circuit components and other parasitic capacitance, such as amplifier input capacitance and stray printed circuit board capacitance.

Figure 2 illustrates a method of compensating phase lag caused by using a large-value feedback resistor. Feedback capacitor C_{FB} introduces sufficient phase lead to overcome the phase lag caused by feedback resistor R_{FB} and input capacitance C_{IN}. The value of C_{FB} is determined by first estimating C_{IN} and then applying the following formula:

$$R_{IN} \times C_{IN} \leq R_{FB} \times C_{FB}$$
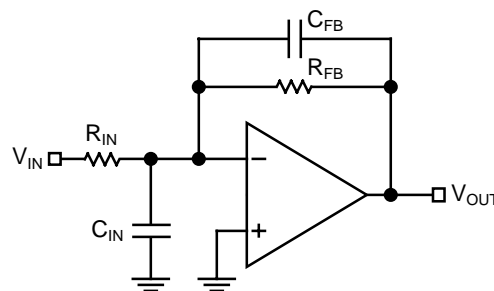
Figure 2. Cancelling Feedback Phase Lag

Since a significant percentage of C_{IN} may be caused by board layout, it is important to note that the correct value of C_{FB} may change when changing from a breadboard to the final circuit layout.

Typical Circuits

Some single-supply, rail-to-rail applications for which the LMC7101 is well suited are shown in the circuit diagrams of Figures 3 through 7.
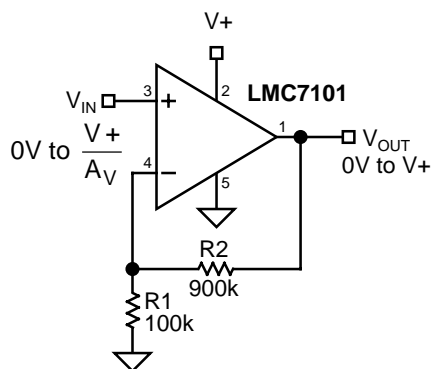
Figure 3a. Noninverting Amplifier
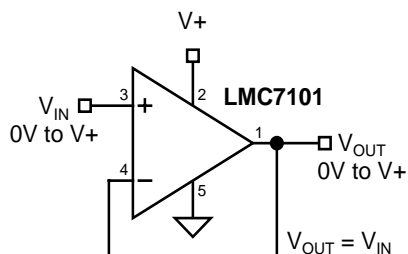
Figure 3b. Noninverting Amplifier Behavior

$$A_V = 1 + \frac{R2}{R1} \approx 10$$

Figure 4. Voltage Follower

$$V_{OUT} = V_{IN}$$
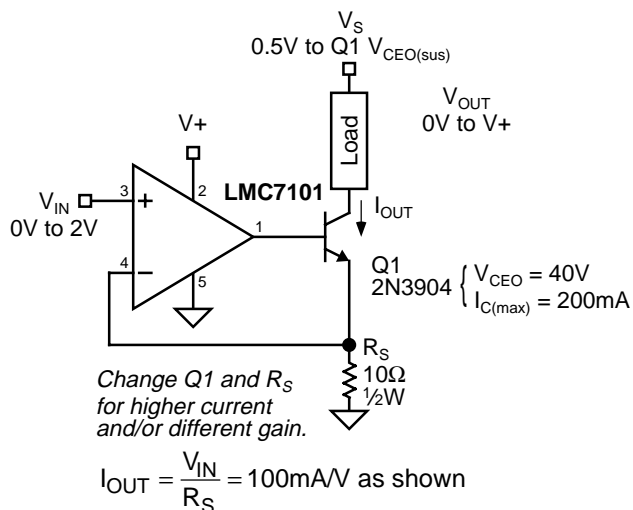
Figure 5. Voltage-Controlled Current Sink

Change Q1 and R_S for higher current and/or different gain.

$$I_{OUT} = \frac{V_{IN}}{R_S} = 100mA/V \text{ as shown}$$

Q1 2N3904 $\begin{cases} V_{CEO} = 40V \\ I_{C(max)} = 200mA \end{cases}$
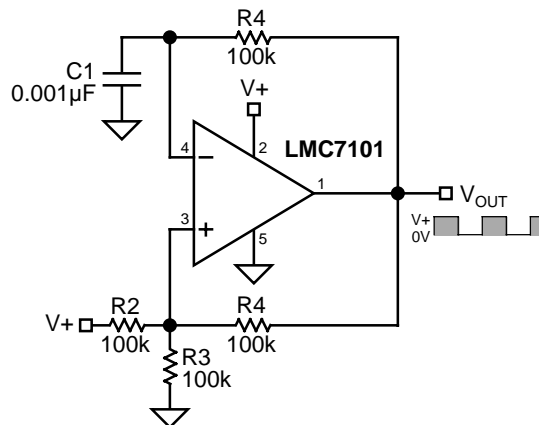
Figure 6. Square Wave Oscillator
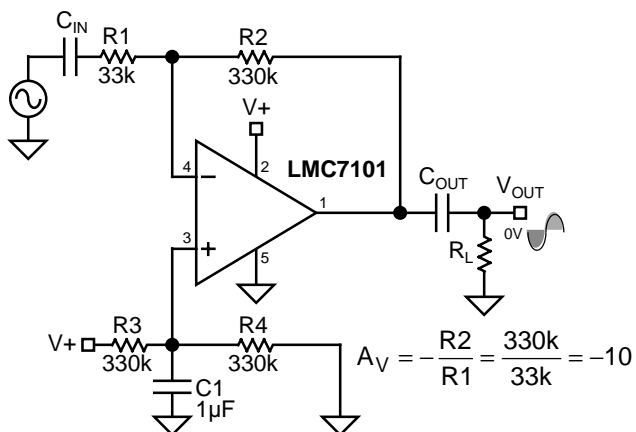
Figure 7. AC-Coupled Inverting Amplifier

$$A_V = -\frac{R2}{R1} = \frac{330k}{33k} = -10$$

Package Information

1.90 (0.075) REF

0.95 (0.037) REF

1.75 (0.069)
1.50 (0.059)

3.00 (0.118)
2.60 (0.102)

DIMENSIONS:
MM (INCH)

3.02 (0.119)
2.80 (0.110)

1.30 (0.051)
0.90 (0.035)

0.20 (0.008)
0.09 (0.004)

10°
0°

0.50 (0.020)
0.35 (0.014)

0.15 (0.006)
0.00 (0.000)

0.60 (0.024)
0.10 (0.004)

SOT-23-5 (M5)