1. Description

1.1. Project

Project Name	sdr
Board Name	custom
Generated with:	STM32CubeMX 4.27.0
Date	10/01/2018

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103VETx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

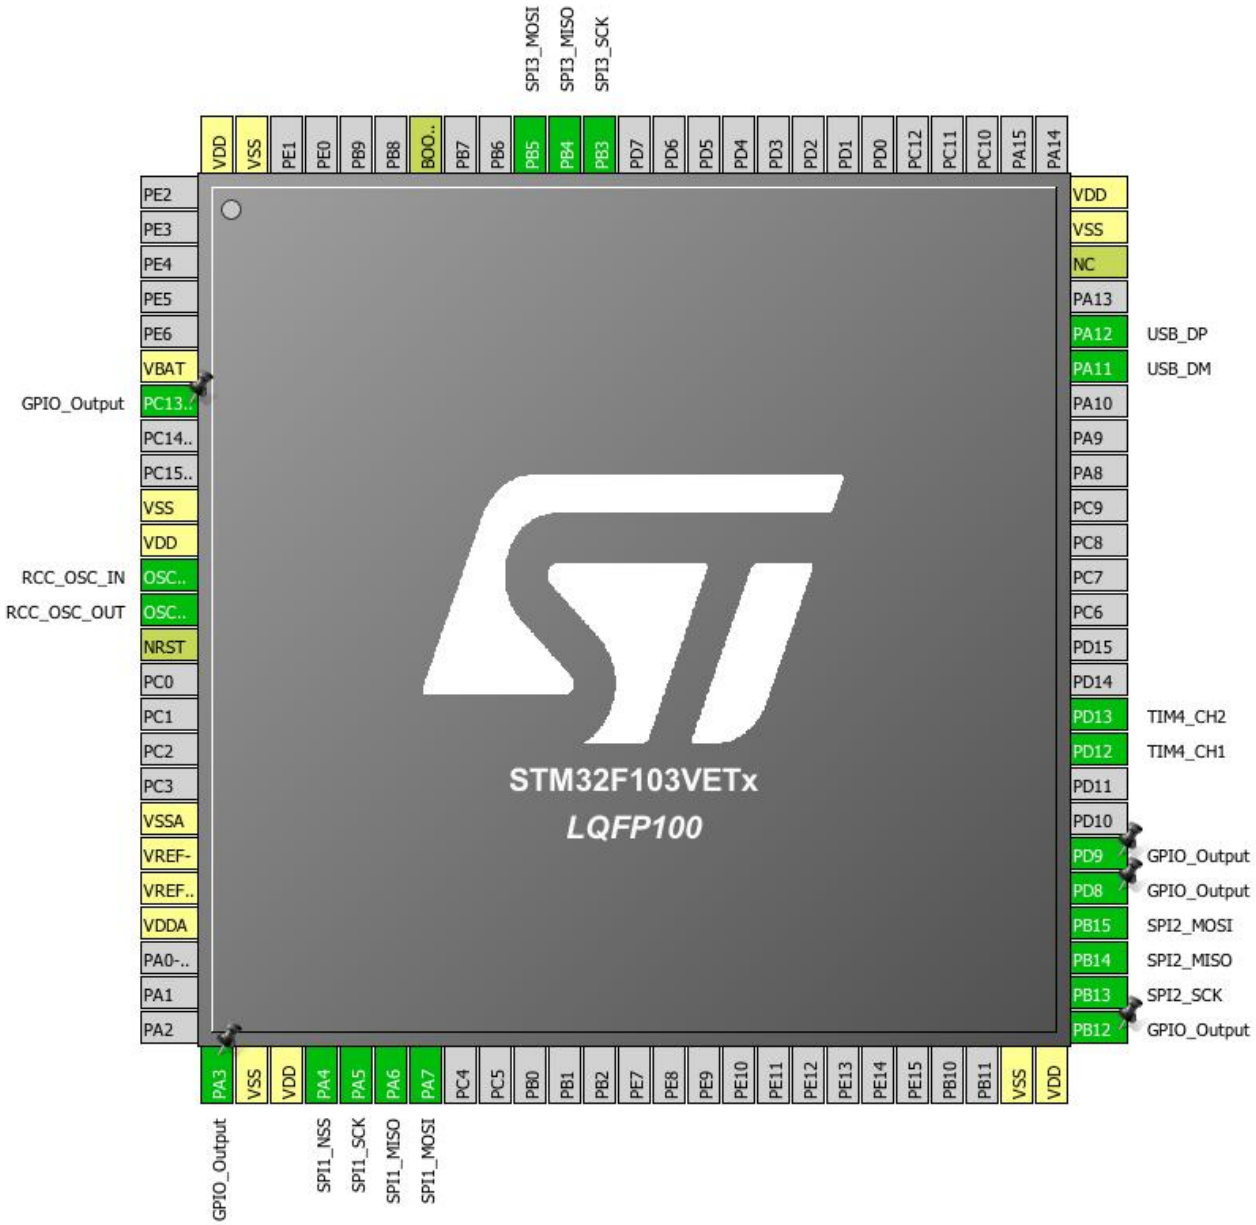

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PC13-TAMPER-RTC *	I/O	GPIO_Output	
10	VSS	Power		
11	VDD	Power		
12	OSC_IN	I/O	RCC_OSC_IN	
13	OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VSSA	Power		
20	VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
26	PA3 *	I/O	GPIO_Output	
27	VSS	Power		
28	VDD	Power		
29	PA4	I/O	SPI1_NSS	
30	PA5	I/O	SPI1_SCK	
31	PA6	I/O	SPI1_MISO	
32	PA7	I/O	SPI1_MOSI	
49	VSS	Power		
50	VDD	Power		
51	PB12 *	I/O	GPIO_Output	
52	PB13	I/O	SPI2_SCK	
53	PB14	I/O	SPI2_MISO	
54	PB15	I/O	SPI2_MOSI	
55	PD8 *	I/O	GPIO_Output	
56	PD9 *	I/O	GPIO_Output	
59	PD12	I/O	TIM4_CH1	
60	PD13	I/O	TIM4_CH2	
70	PA11	I/O	USB_DM	
71	PA12	I/O	USB_DP	
73	NC	NC		
74	VSS	Power		
75	VDD	Power		
89	PB3	I/O	SPI3_SCK	
90	PB4	I/O	SPI3_MISO	
91	PB5	I/O	SPI3_MOSI	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

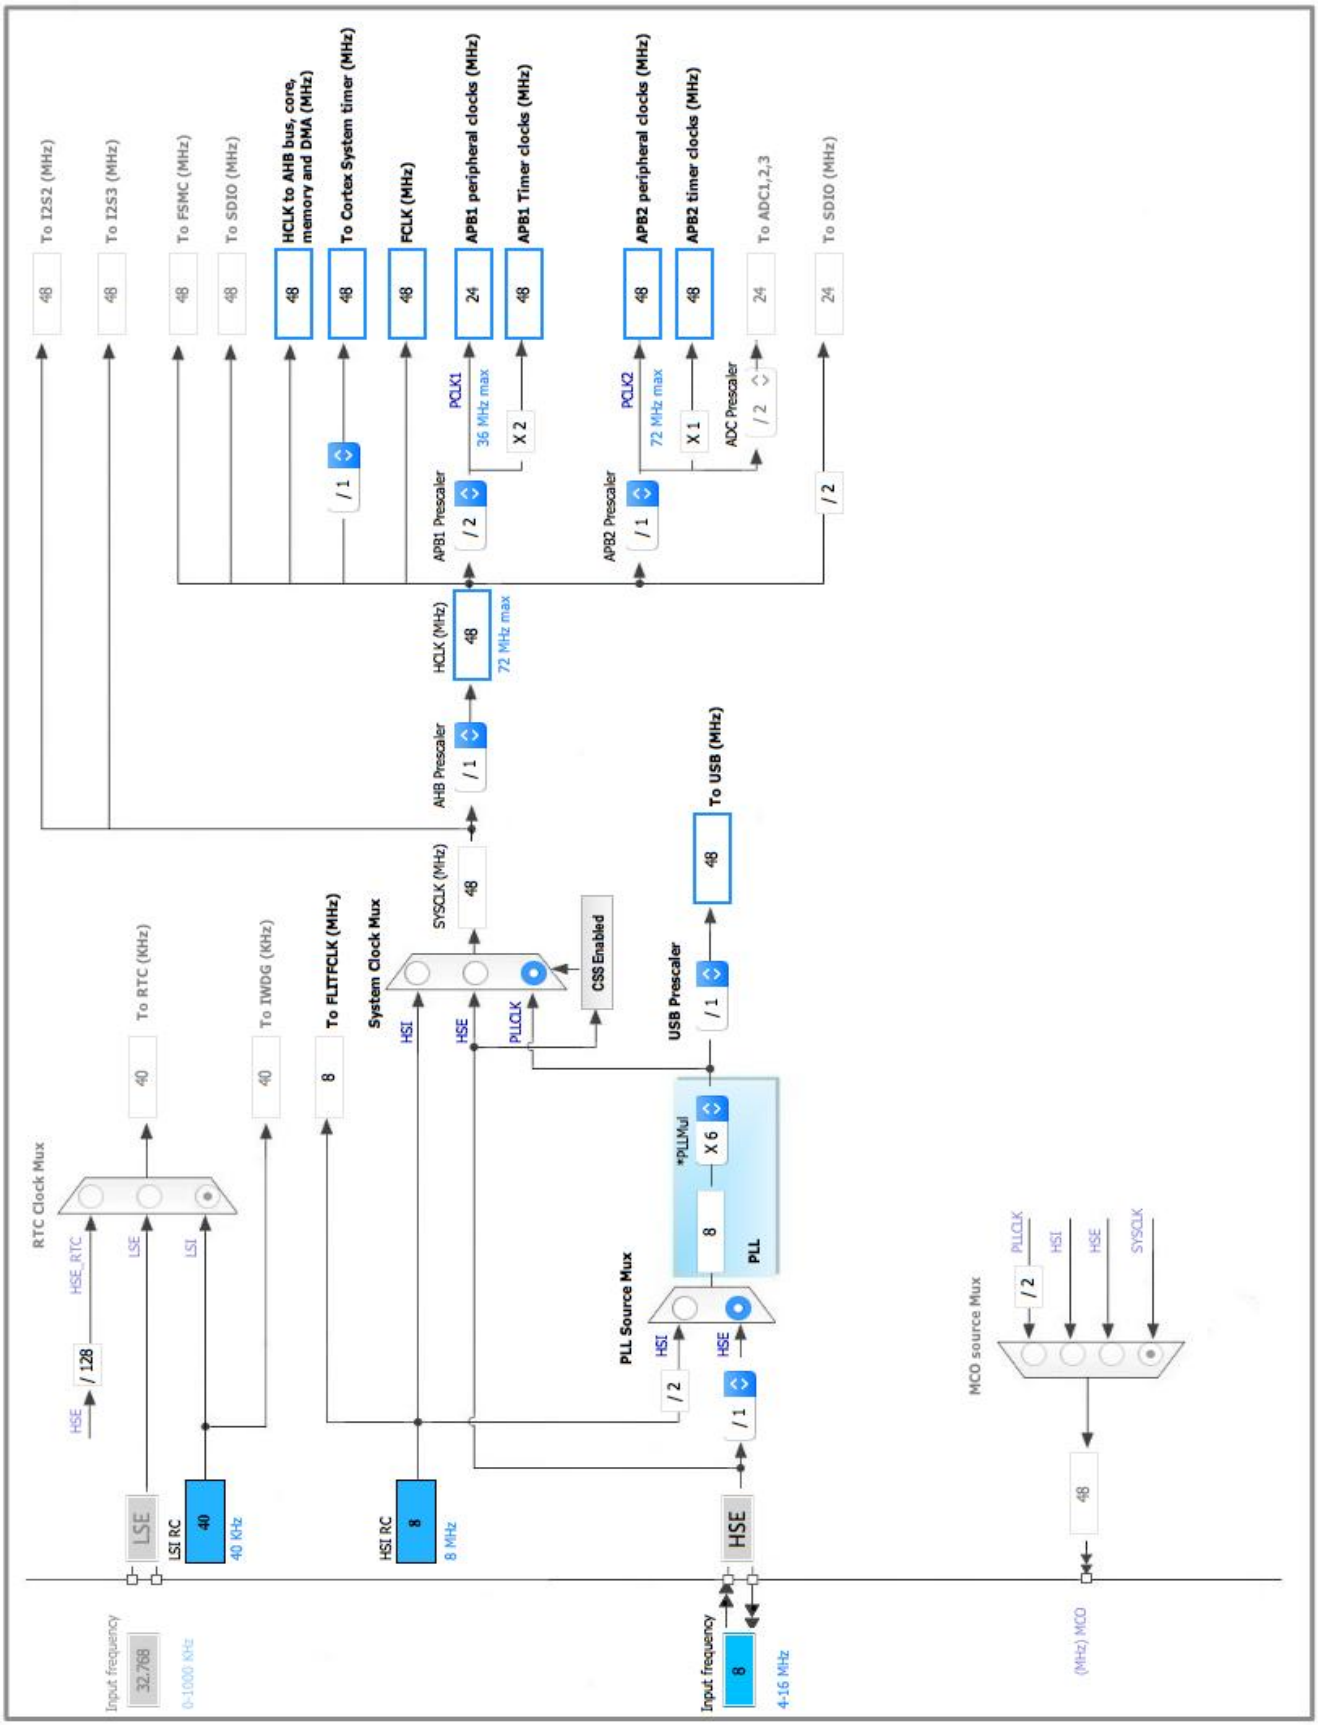

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

5.2. SPI1

Mode: Full-Duplex Master

Hardware NSS Signal: Hardware NSS Output Signal

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**32 ***
Baud Rate	**1.5 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Output Hardware

5.3. SPI2

Mode: Full-Duplex Master

5.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**12.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.4. SPI3

Mode: Full-Duplex Master

5.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**12.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.5. SYS

Debug: No Debug

Timebase Source: SysTick

5.6. TIM4

Combined Channels: Encoder Mode

5.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**65535 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	**Encoder Mode TI1 and TI2 ***
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

5.7. USB

mode: Device (FS)

5.7.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	8 Bytes

Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

5.8. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.8.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USB CDC Rx Buffer Size	1000
USB CDC Tx Buffer Size	1000

5.8.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA4	SPI1_NSS	Alternate Function Push Pull	n/a	**High ***	
	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	**High ***	
	PA6	SPI1_MISO	Input mode	No pull-up and no pull-down	**n/a**	
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	**High ***	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	n/a	**High ***	
	PB14	SPI2_MISO	Input mode	No pull-up and no pull-down	**n/a**	
	PB15	SPI2_MOSI	Alternate Function Push Pull	n/a	**High ***	
SPI3	PB3	SPI3_SCK	Alternate Function Push Pull	n/a	**High ***	
	PB4	SPI3_MISO	Input mode	No pull-up and no pull-down	**n/a**	
	PB5	SPI3_MOSI	Alternate Function Push Pull	n/a	**High ***	
TIM4	PD12	TIM4_CH1	Input mode	**Pull-up ***	n/a	
	PD13	TIM4_CH2	Input mode	**Pull-up ***	n/a	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PD8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PD9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB high priority or CAN TX interrupts	true	0	0
USB low priority or CAN RX0 interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM4 global interrupt	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		
SPI3 global interrupt	unused		

*** User modified value**

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103VETx
Datasheet	14611_Rev12

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Pack Report

9. Software Project

9.1. Project Settings

Name	Value
Project Name	sdr
Project Folder	/Users/danilbogdanov/work/sources-sdr/sdr
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

9.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No