Micronix

PRODUCT DATASHEET

Part No. : ***MX6040-16S8P-26650-M01***

1 Product Details :

Lithium Ion battery pack, 60V 41.6Ah, 16S8P Configuration of 3.6V 5200~5300mAh 26650 cell, With BMS, with MS Powder coated metal enclosure, with SB50 Connector

2 Product Features :

- **Long life of up to 1500 charge discharge cycles**
- **Built in Battery Management system which performs full charge cut off, full discharge cut off, short circuit protection and cell balance**
- **Compact and light weight**
- **Low Self Discharge Rate around 3% per month**
- **High Discharge current upto 65Amps**
- **High Charge current up to 10Amps**
- **High temperature performance**
- **High Depth Of Discharge up to 100%**

3. Specifications

ITEM	Unit	SPECIFICATION
Technology		Lithium Ion
Nominal Voltage	V	60V
Typical Capacity	Ah	41.6Ah
No of Cell	No.s	128
Dimension	mm	(customizable)
Individual Cell capacity	V, mAh	3.6V, 5200~5300mAh real capacity
Weight	kg	16.5 kg
Cell Configuration		16S8P(16 in series, 8 in parallel)
Battery Management Circuit functions		Over Voltage Protection, Under Voltage Protection, Cell balancing(Passive), Short Circuit Protection,Over Current Protection
Communication		Nil
Full Charge Cut Off Voltage	V	67.2 ± 1V Full charge cut off will happen in BMS once any of cell reaches 4.2V
Full Discharge Cut Off voltage (Charge end Voltage)	V	51 ± 1 V Full charge cut off will happen in

		BMS once any of cell reaches 2.9V
Maximum Charge Current	Amps	10
Charge Voltage	V	67.2V
Maximum Continuous Discharge Current	Amp	50
Maximum Peak Discharge Current	Amp	60
Operating Temperature	°C	Charge: 0°C to 50C Discharge: -20°C to 60°C
Storage Temperature	°C	1month: -20°C to 50°C 3months -20°C to 45°C
Enclosure type		MS Powder Coated Metal enclosure
Enclosure color		Black /Blue (Customizable)
IP rating		IP 67
O/P Termination		SB50 connector for discharge

5. Recommended Charger :

67.2V CC- CV Charger with below features

- Initially Charge battery in CC(Constant Current) mode, then switch to CV (Constant Voltage)mode
- CV limit : 67.2V
- CC Limit : 10Amps or less
- With zero start function (Charge battery even if battery Voltage drops to 0V)
- With reverse polarity protection

6. Bluetooth App display photos:

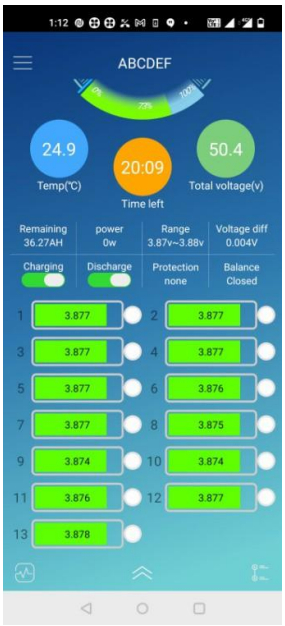

7. Safety Precautions :

1. Use a recommended charger only.
2. Charge battery at least once in a month.
3. Do not throw the battery into fire, or heat.
4. Do not expose the battery pack into water, it may get damaged and will not operate.
5. Do not externally short-circuit the battery pack terminals.
6. It is strongly recommended that the battery pack is not charged above the maximum charging ratings under any Circumstances.
7. Do not use the battery pack in other device. Differences in specification may damage the battery pack or device.
8. Do not deform the battery pack by applying pressure. It may be broken, causing leakage, internal short circuit.
9. Do not disassemble the battery pack into cells.
10. Do not cut or tear at the cable/connector/power glands