STM32
CubeMX

1. Description

1.1. Project

Project Name	WeatherStation
Board Name	NUCLEO-L476RG
Generated with:	STM32CubeMX 6.0.0
Date	03/18/2022

1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4

2. Pinout Configuration

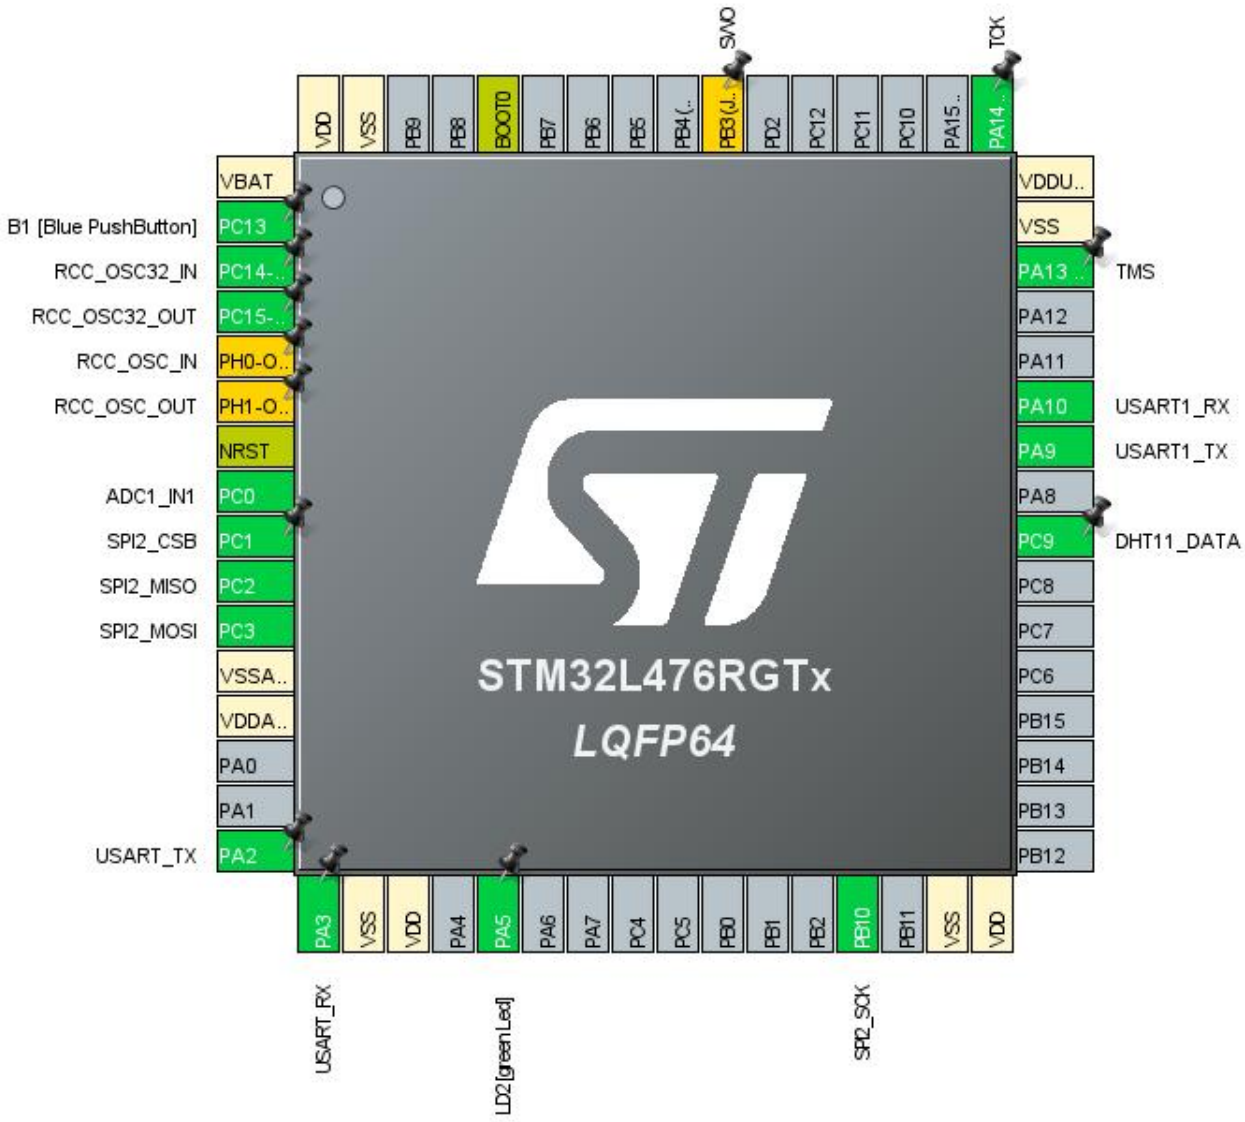

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN (PH0) *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT (PH1) *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0	I/O	ADC1_IN1	
9	PC1 **	I/O	GPIO_Output	SPI2_CSB
10	PC2	I/O	SPI2_MISO	
11	PC3	I/O	SPI2_MOSI	
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [green Led]
29	PB10	I/O	SPI2_SCK	
31	VSS	Power		
32	VDD	Power		
40	PC9 **	I/O	GPIO_Output	DHT11_DATA
42	PA9	I/O	USART1_TX	
43	PA10	I/O	USART1_RX	
46	PA13 (JTMS-SWDIO)	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDDUSB	Power		
49	PA14 (JTCK-SWCLK)	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 (JTDO-TRACESWO) *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

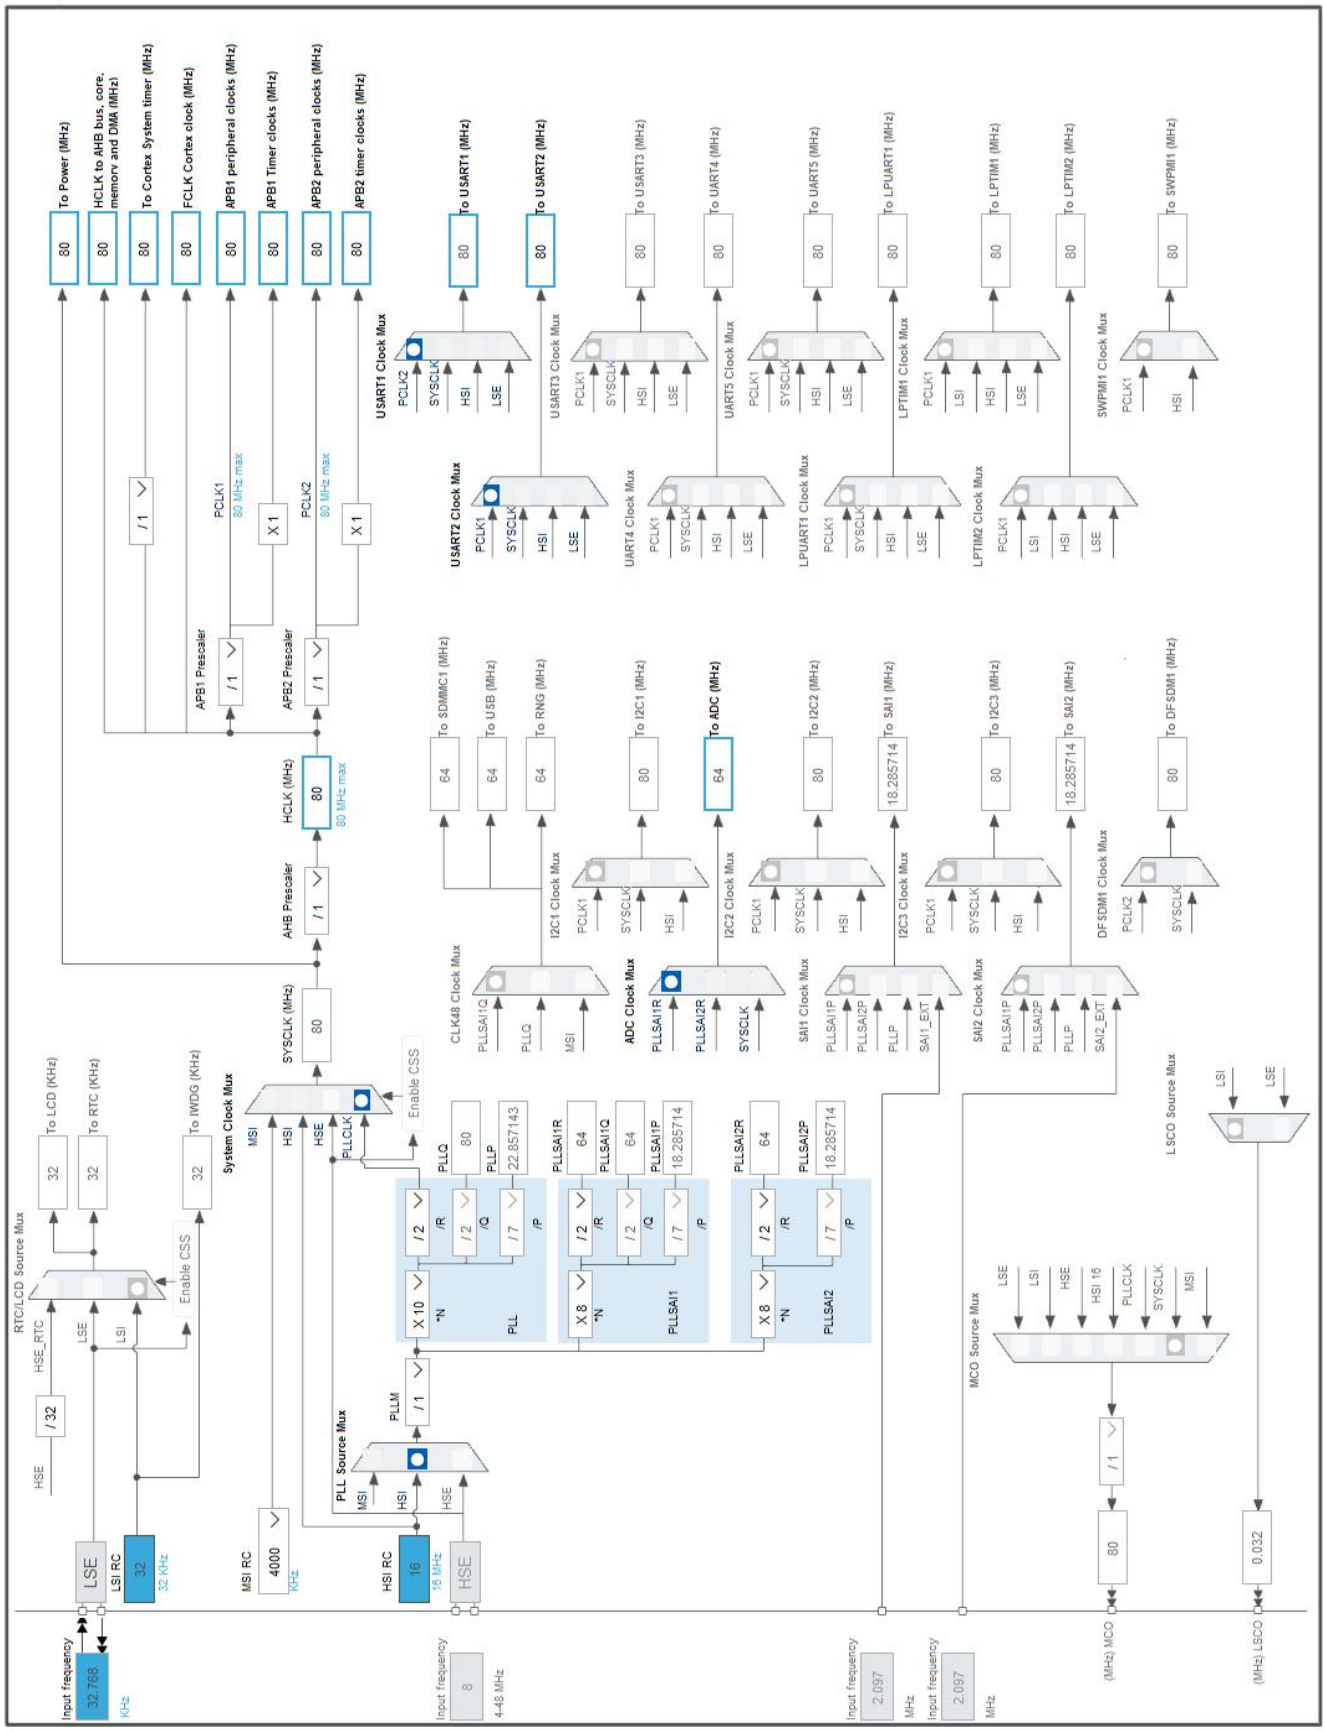

5. Software Project

5.1. Project Settings

Name	Value
Project Name	WeatherStation
Project Folder	C:\Users\jakub\OneDrive\Desktop\Studia\Studia_6_sem_3_rok\SR\Projekt\SteRo
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L4 V1.16.0
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	IP Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_USART2_UART_Init	USART2
4	MX_ADC1_Init	ADC1
5	MX_SPI2_Init	SPI2
6	MX_USART1_UART_Init	USART1

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	DS10198_Rev4

6.2. Parameter Selection

Temperature	25
Vdd	3.0

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	SRAM2	n/a
CPU Frequency	80 MHz	0 Hz
Clock Configuration	HSE PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	10.7 mA	1.18 µA
Duration	0.1 ms	0.9 ms
DMIPS	100.0	0.0
Ta Max	103.56	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	1.07 mA
Battery Life	4 months, 10 days, 3 hours	Average DMIPS	100.0 DMIPS

6.6. Chart

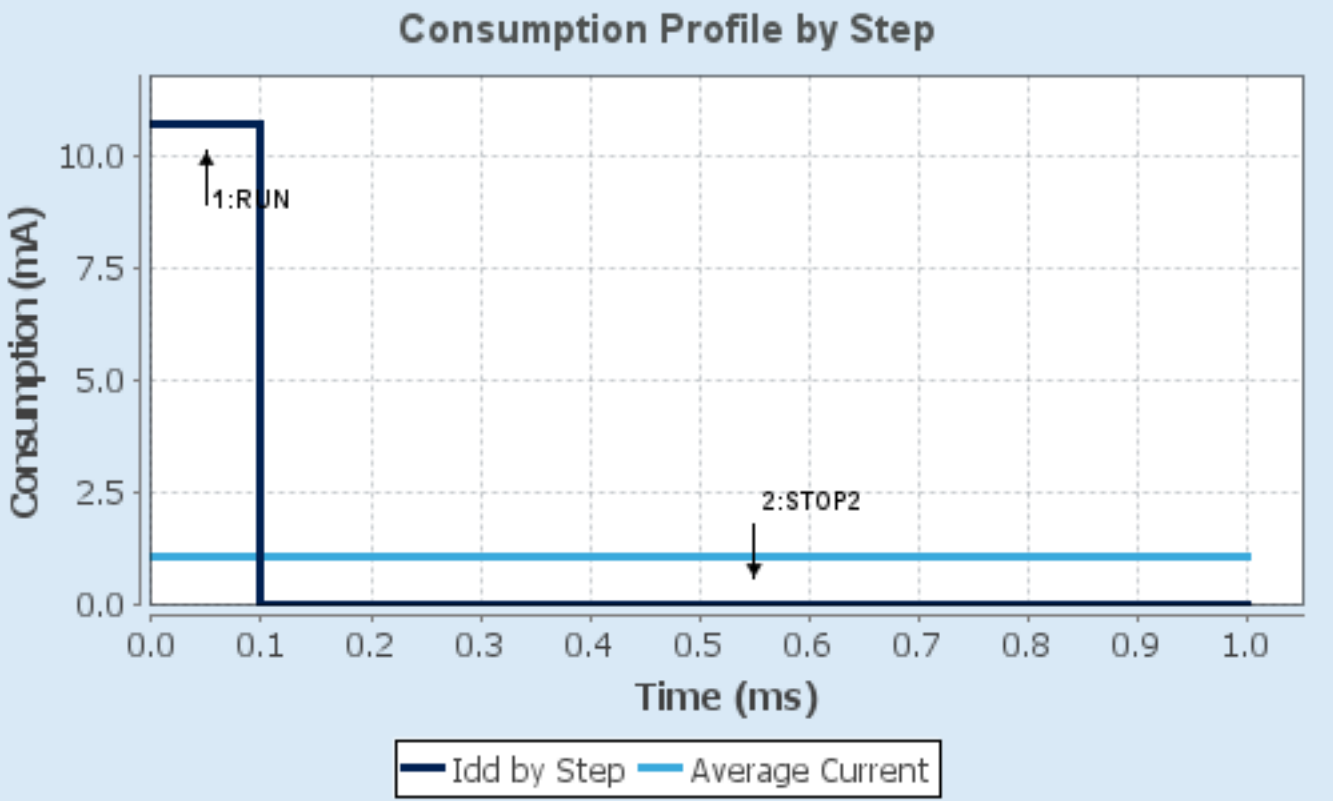
Consumption Profile by Step
Consumption (mA)
10.0
7.5
5.0
2.5
0.0
1:RUN
2:STOP2
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. IPs and Middleware Configuration

7.1. ADC1

IN1: IN1 Single-ended

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	Asynchronous clock mode divided by 1
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Enable Regular Oversampling	Disable
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 1
Sampling Time	2.5 Cycles
Offset Number	No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions	Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false

7.2. GPIO

7.3. RCC

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	**Enabled ***
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.4. SPI2

Mode: Full-Duplex Master

7.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**40.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

7.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.6. USART1

Mode: Asynchronous

7.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

7.7. USART2

Mode: Asynchronous

7.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC0	ADC1_IN1	Analog mode for ADC conversion	No pull-up and no pull-down	n/a	
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
SPI2	PC2	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PC3	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB10	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
SYS	PA13 (JTMS-SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14 (JTCK-SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	USART_RX
Single Mapped Signals	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
	PB3 (JTDO-TRACESWO)	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	**External Interrupt**	No pull-up and no pull-down	n/a	B1 [Blue PushButton]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
			Mode with Falling edge trigger detection			
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI2_CSB
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green Led]
	PC9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DHT11_DATA

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 interrupts	unused		
SPI2 global interrupt	unused		
USART1 global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	true	true	false
Hard fault interrupt	true	true	false
Memory management fault	true	true	false
Prefetch fault, memory access fault	true	true	false
Undefined instruction or illegal state	true	true	false
System service call via SWI instruction	true	true	false
Debug monitor	true	true	false
Pendable request for system service	true	true	false
System tick timer	true	true	true

*** User modified value**

9. System Views

9.1. Category view

9.1.1. Current

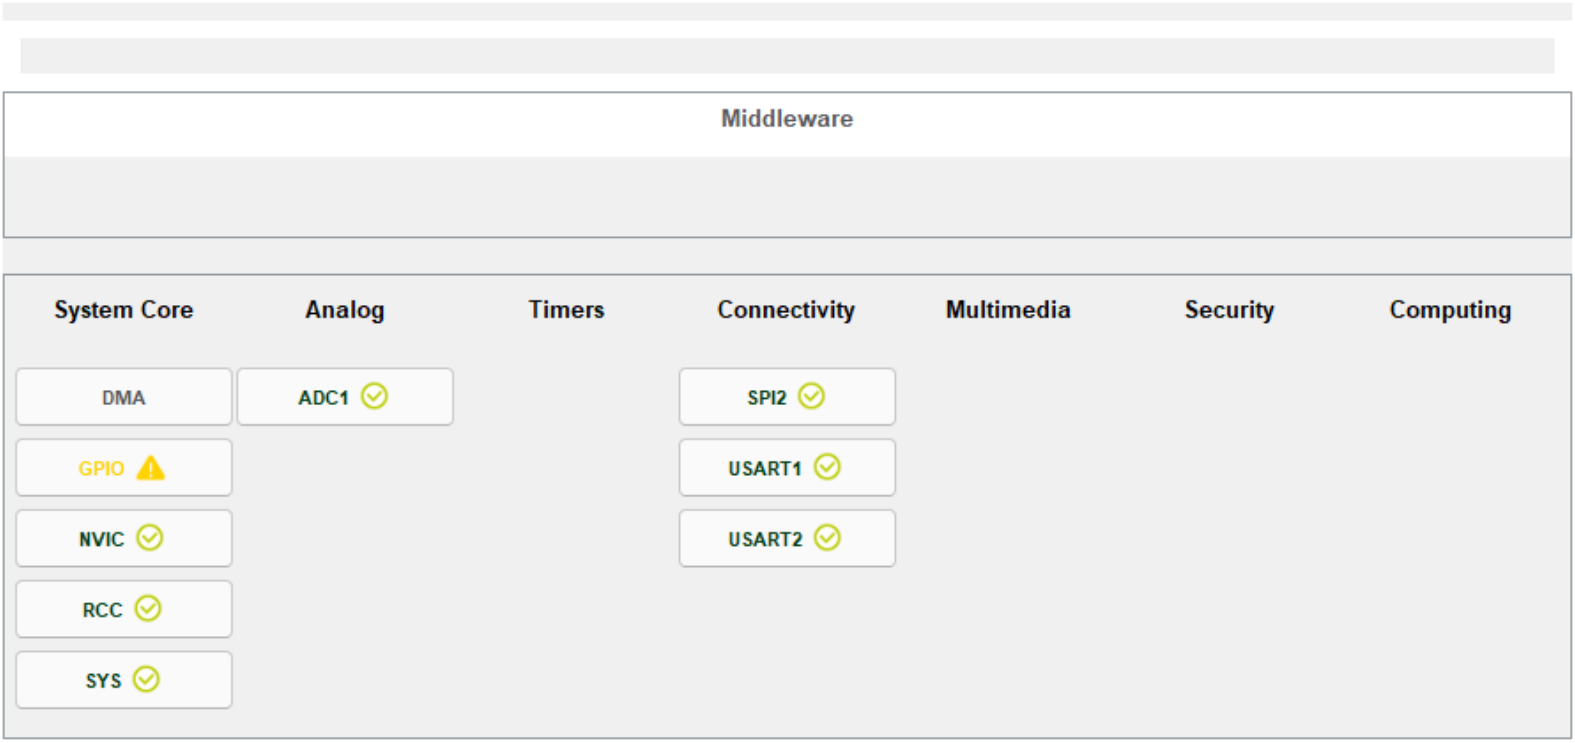

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00108832.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00083560.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00111498.pdf
Application note	http://www.st.com/resource/en/application_note/CD00160362.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00085385.pdf
Application note	http://www.st.com/resource/en/application_note/DM00087593.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00151811.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf
Application note	http://www.st.com/resource/en/application_note/DM00156964.pdf
Application note	http://www.st.com/resource/en/application_note/DM00150423.pdf
Application note	http://www.st.com/resource/en/application_note/DM00209748.pdf

Application note	http://www.st.com/resource/en/application_note/DM00125306.pdf
Application note	http://www.st.com/resource/en/application_note/DM00141025.pdf
Application note	http://www.st.com/resource/en/application_note/DM00144612.pdf
Application note	http://www.st.com/resource/en/application_note/DM00148033.pdf
Application note	http://www.st.com/resource/en/application_note/DM00209768.pdf
Application note	http://www.st.com/resource/en/application_note/DM00216518.pdf
Application note	http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note	http://www.st.com/resource/en/application_note/DM00227538.pdf
Application note	http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note	http://www.st.com/resource/en/application_note/DM00269143.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note	http://www.st.com/resource/en/application_note/DM00223574.pdf
Application note	http://www.st.com/resource/en/application_note/DM00226326.pdf
Application note	http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note	http://www.st.com/resource/en/application_note/DM00260952.pdf
Application note	http://www.st.com/resource/en/application_note/DM00263732.pdf
Application note	http://www.st.com/resource/en/application_note/DM00269146.pdf
Application note	http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note	http://www.st.com/resource/en/application_note/DM00264868.pdf
Application note	http://www.st.com/resource/en/application_note/DM00355687.pdf
Application note	http://www.st.com/resource/en/application_note/DM00311483.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note	http://www.st.com/resource/en/application_note/DM00367673.pdf
Application note	http://www.st.com/resource/en/application_note/DM00373474.pdf
Application note	http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note	http://www.st.com/resource/en/application_note/DM00371863.pdf
Application note	http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354333.pdf
Application note	http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note	http://www.st.com/resource/en/application_note/DM00445657.pdf

Application note	http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note	http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00209772.pdf
Application note	http://www.st.com/resource/en/application_note/DM00476869.pdf
Application note	http://www.st.com/resource/en/application_note/DM00660597.pdf
Application note	http://www.st.com/resource/en/application_note/DM00725181.pdf