OUTPUT DIAGRAM

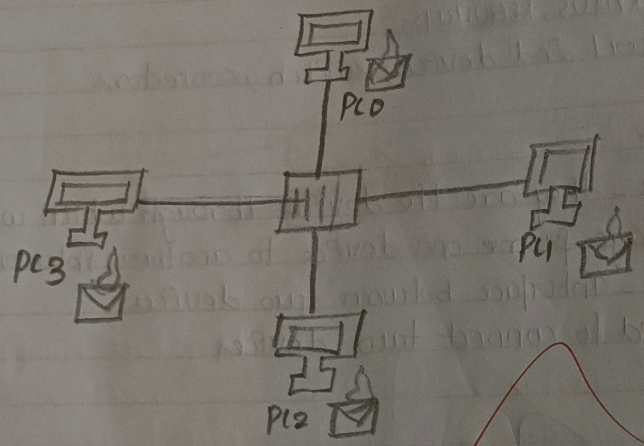

Expt.No.....9..... Page No.....

DATA LINK LAYER TRAFFIC STIMULATION USING PACKET TRACER
ANALYSIS OF CSMA/CD & CSMA/CA

AIM:

To Implement DLL traffic stimulation using packet tracer
Analysis of CSMA/CD & CSMA/CA

SOFTWARE/APPARATUS REQUIER

packet tracer, end devices, switches, connectors

procedure:

1. open software (packet tracer)
2. choose the PC's and switch and drag it to window
3. connect all end devices to switch
4. Assign IP address for all end devices
5. Using ping command, establish communication between two host devices
6. Display packet transmission in stimulation mode

RESULT:

Thus, DLL traffic stimulation using packet tracer Analysis of CSMA/CD & CSMA/CA is Implemented Succ

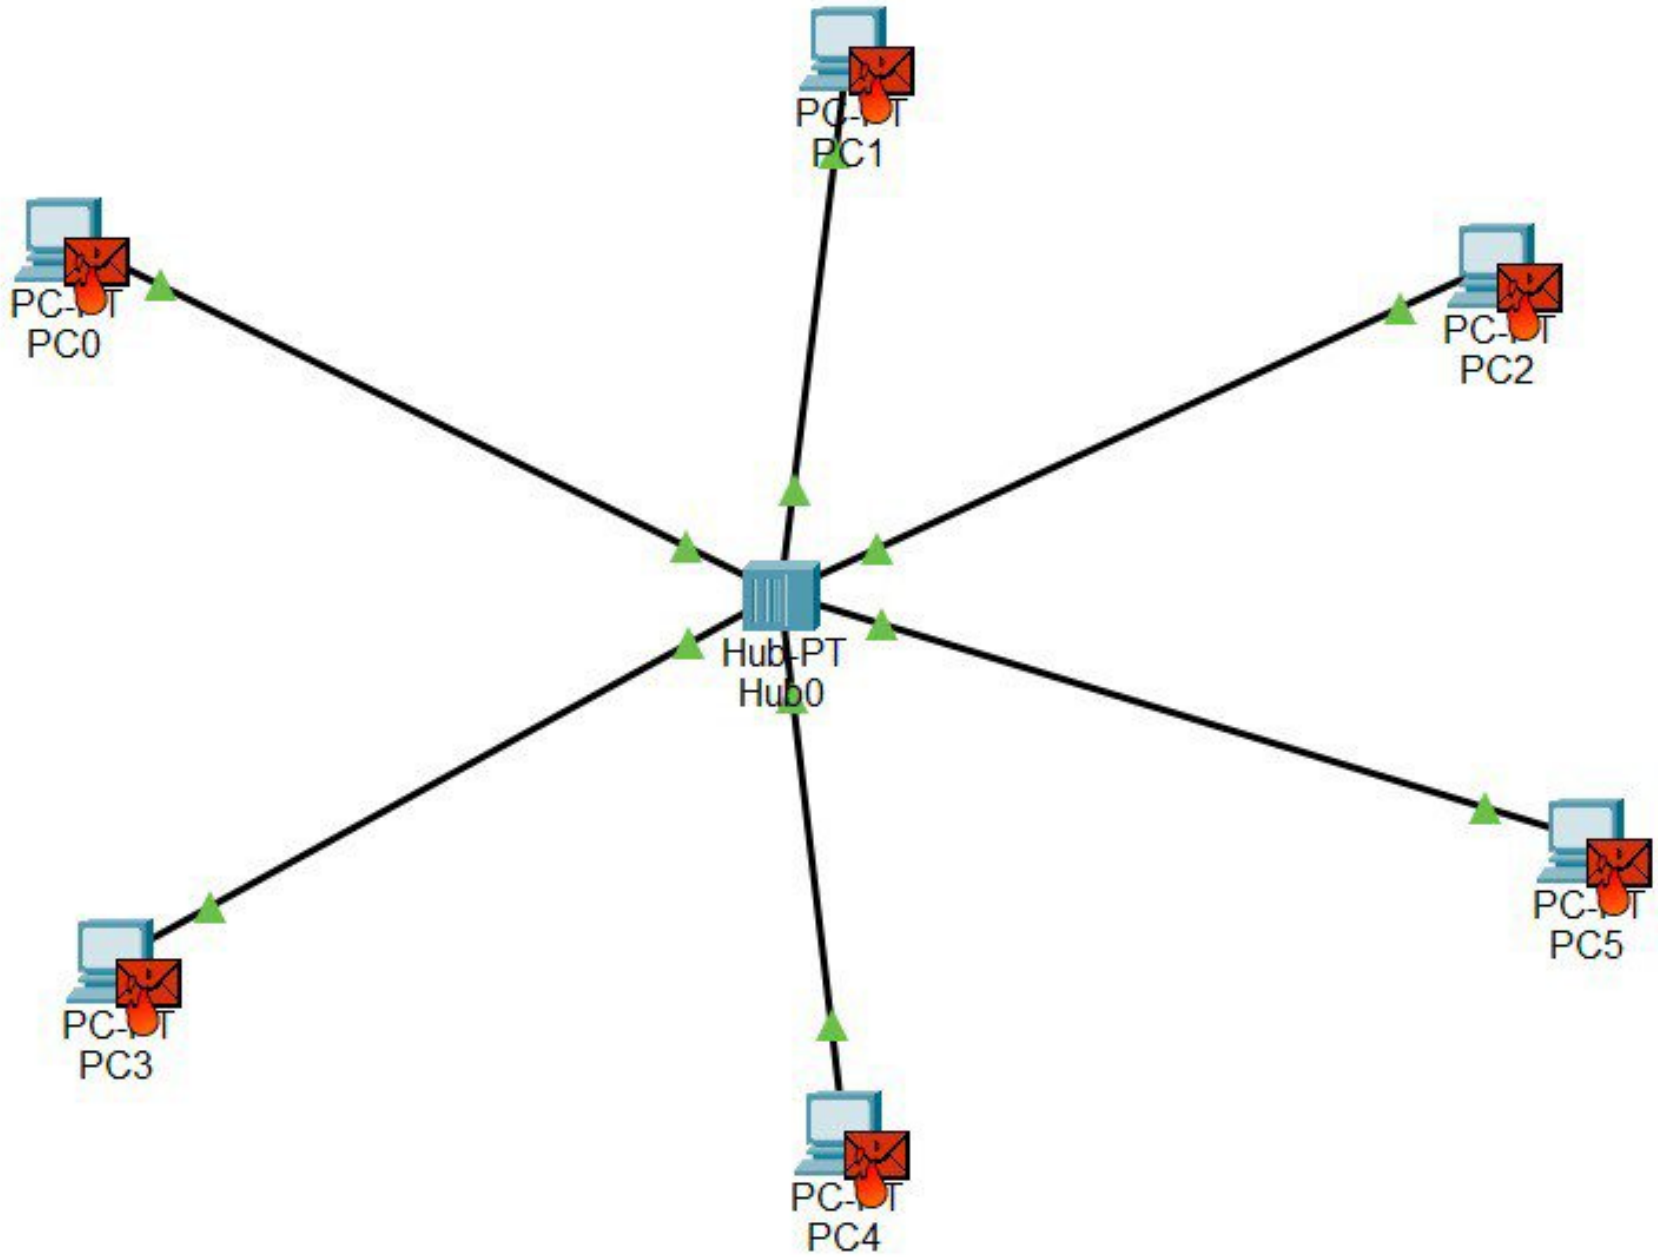
PC-PT
PC1
PC-PT
PC0
PC-PT
PC2
Hub-PT
Hub0
PC-PT
PC3
PC-PT
PC5
PC-PT
PC4