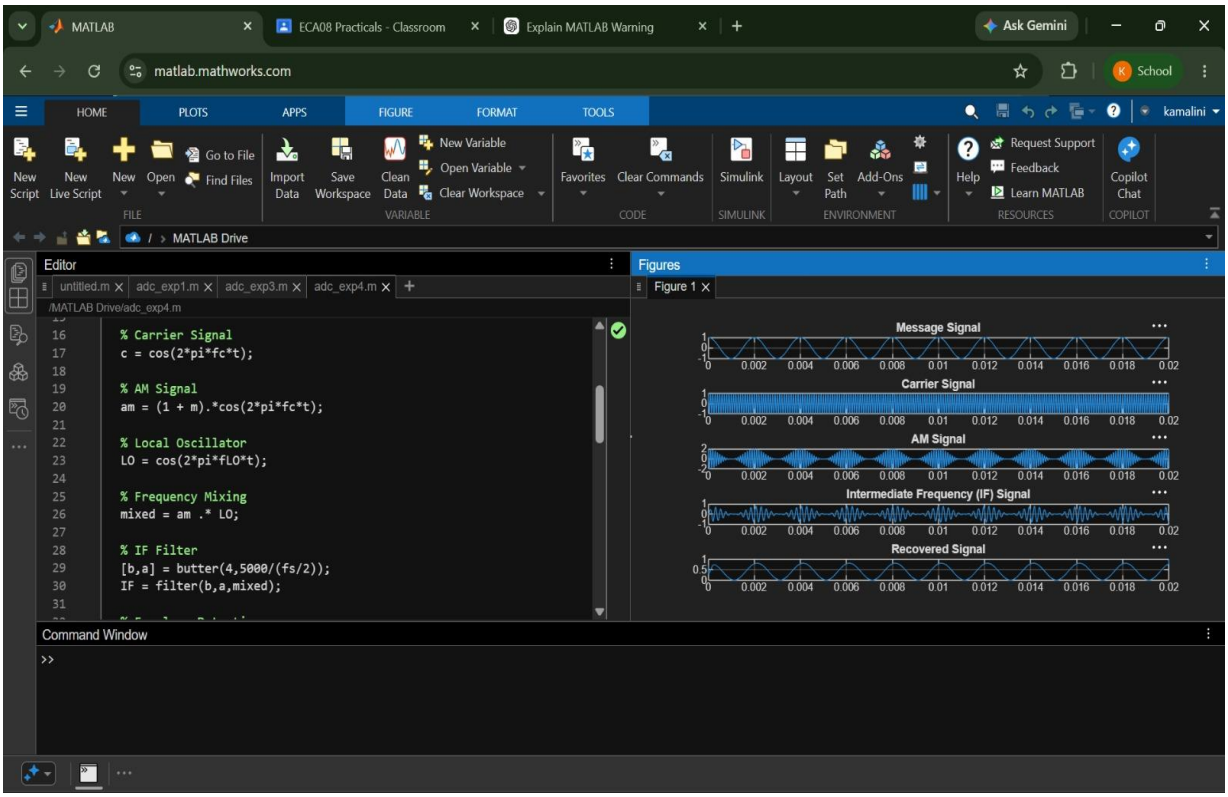
Experiment-4

Code:

```
clc;
clear;
close all;
% Parameters
fs = 100000;
t = 0:1/fs:0.02;
fm = 500; % Message frequency
fc = 10000; % Carrier frequency
fLO = 14550; % Local Oscillator (IF = 4550 Hz)
% Message Signal
m = cos(2*pi*fm*t);
% Carrier Signal
c = cos(2*pi*fc*t);
% AM Signal
am = (1 + m).*cos(2*pi*fc*t);
% Local Oscillator
LO = cos(2*pi*fLO*t);
% Frequency Mixing
mixed = am .* LO;
% IF Filter
[b,a] = butter(4,5000/(fs/2));
IF = filter(b,a,mixed);
% Envelope Detection
env = abs(hilbert(IF));
% Display
figure;
subplot(4,1,1)
```

```
plot(t,m)
title('Message Signal')
grid on
figure;
subplot(5,1,2)
plot(t,c)
title('Carrier Signal')
grid on
subplot(5,1,3)
plot(t,am)
title('AM Signal')
grid on
subplot(5,1,4)
plot(t,IF)
title('Intermediate Frequency (IF) Signal')
grid on
subplot(5,1,5)
plot(t,env)
title('Recovered Signal')
grid on;
```


MATLAB
ECA08 Practicals - Classroom
Explain MATLAB Warning
Ask Gemini
matlab.mathworks.com
School
HOME
PLOTS
APPS
FIGURE
FORMAT
TOOLS
kamalini
New Script
New Live Script
New
Open
Go to File
Find Files
FILE
Import Data
Save Workspace
Clean Data
New Variable
Open Variable
Clear Workspace
VARIABLE
Favorites
Clear Commands
CODE
Simulink
SIMULINK
Layout
Set Path
Add-Ons
ENVIRONMENT
Help
Request Support
Feedback
Learn MATLAB
RESOURCES
Copilot Chat
COPILOT
MATLAB Drive
Editor
untitled.m
adc_exp1.m
adc_exp3.m
adc_exp4.m
/MATLAB Drive/adc_exp4.m
% Carrier Signal
c = cos(2*pi*fc*t);
% AM Signal
am = (1 + m).*cos(2*pi*fc*t);
% Local Oscillator
LO = cos(2*pi*fLO*t);
% Frequency Mixing
mixed = am .* LO;
% IF Filter
[b,a] = butter(4,5000/(fs/2));
IF = filter(b,a,mixed);
Figures
Figure 1
Message Signal
Carrier Signal
AM Signal
Intermediate Frequency (IF) Signal
Recovered Signal
0 0.002 0.004 0.006 0.008 0.01 0.012 0.014 0.016 0.018 0.02
Command Window
>>