


CO-1

ASSESSMENT - 3

Implement an inter VLAN that has two VLAN structures VLAN 10 should be designed with star topology and VLAN 20 must be designed with bus topology

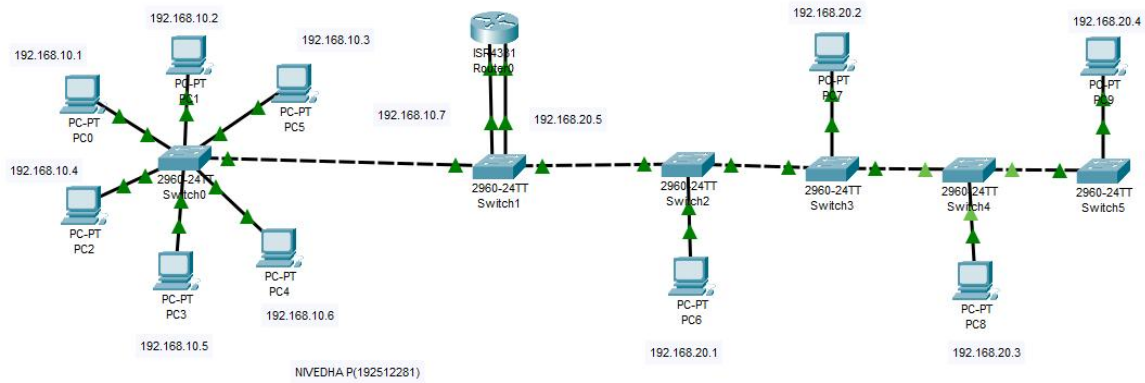

PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.4

Pinging 192.168.10.4 with 32 bytes of data:

Reply from 192.168.10.4: bytes=32 time=189ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time=3ms TTL=128
Reply from 192.168.10.4: bytes=32 time=18ms TTL=128

Ping statistics for 192.168.10.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 189ms, Average = 52ms

C:\>
```