CO1 AT 3

TASK A)

1.Implement an Inter VLAN that has two VLAN structure were VLAN 10 should be design with star topology and VLAN 20 must design with bus topology

OUTPUT

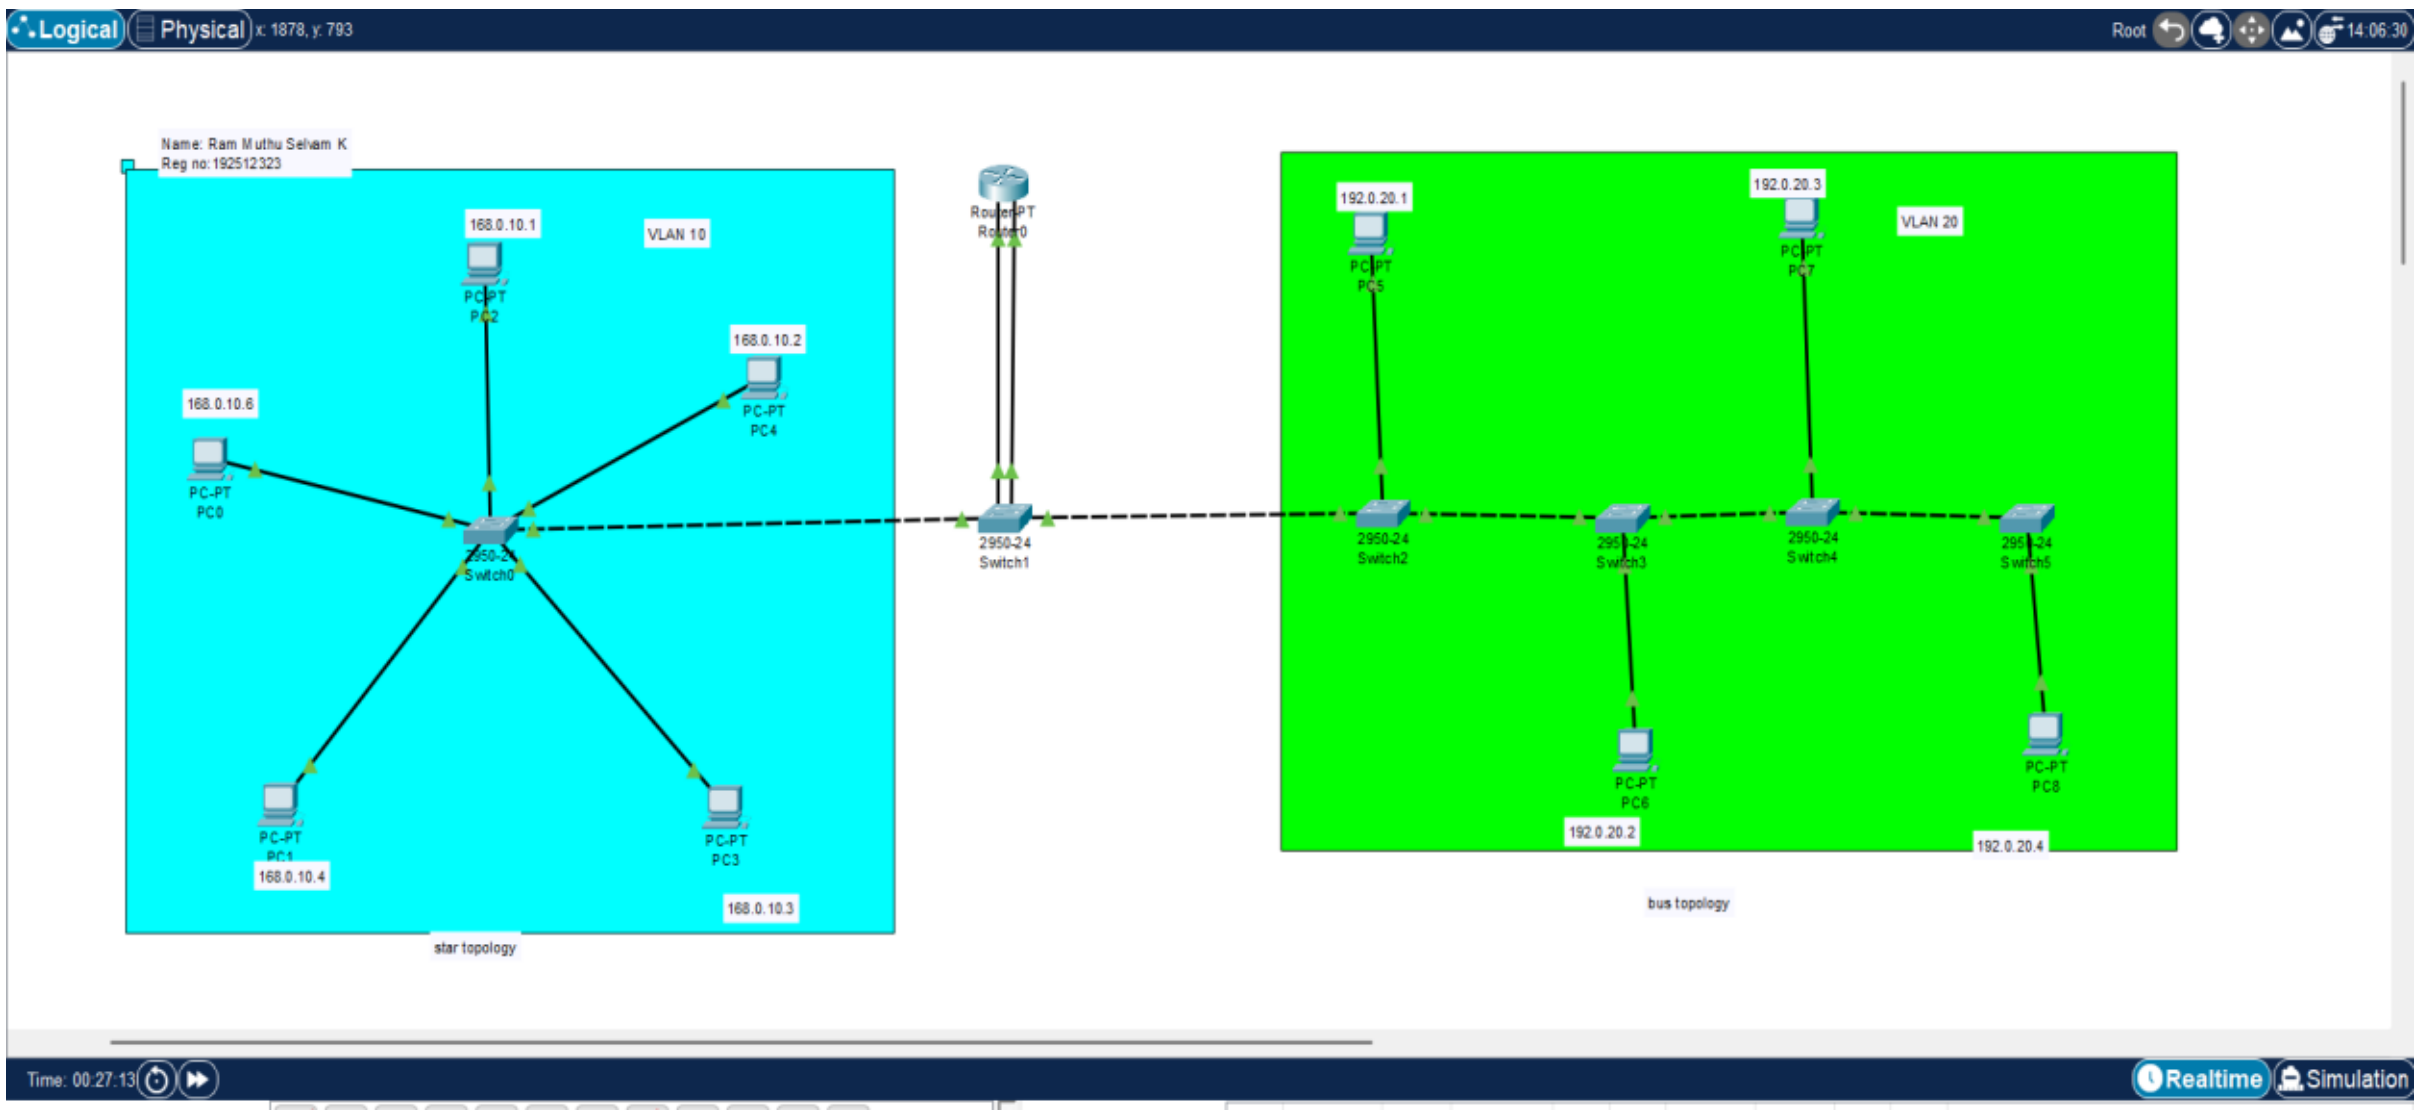

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 168.0.10.3

Pinging 168.0.10.3 with 32 bytes of data:

Reply from 168.0.10.3: bytes=32 time<1ms TTL=128
Reply from 168.0.10.3: bytes=32 time<1ms TTL=128
Reply from 168.0.10.3: bytes=32 time<1ms TTL=128
Reply from 168.0.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 168.0.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.0.20.3

Pinging 192.0.20.3 with 32 bytes of data:

Request timed out.
Reply from 192.0.20.3: bytes=32 time<1ms TTL=127
Reply from 192.0.20.3: bytes=32 time=1ms TTL=127
Reply from 192.0.20.3: bytes=32 time<1ms TTL=127

Ping statistics for 192.0.20.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.0.20.3

Pinging 192.0.20.3 with 32 bytes of data:

Reply from 192.0.20.3: bytes=32 time<1ms TTL=127
Reply from 192.0.20.3: bytes=32 time=1ms TTL=127
Reply from 192.0.20.3: bytes=32 time=1ms TTL=127
Reply from 192.0.20.3: bytes=32 time=6ms TTL=127

Ping statistics for 192.0.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 6ms, Average = 2ms

C:\>
```