# Modeling Power Amplifiers with Memory Polynomial of Delay-Dependent Order

Synthesis of behavioral modeling results, NMSE evaluation, and VHDL implementation

**Leonardo de Andrade Santos**
Department of Electrical Engineering
Universidade Federal do Paraná
Curitiba, PR, Brazil
leonard.andrade@ufpr.br

**Eduardo de Gonçalves de Lima**
Department of Electrical Engineering
Universidade Federal do Paraná
Curitiba, PR, Brazil
eduardo.goncalves@ufpr.br

**Sibilla Batisa da Luz Franca**
Department of Electrical Engineering
Universidade Federal do Paraná
Curitiba, PR, Brazil
sibilla@ufpr.br

**ABSTRACT**

This paper synthesizes an investigation into behavioral modeling of RF power amplifiers for digital pre-distortion. The work starts from the classic Memory Polynomial (MP) model and proposes a variation where the maximum polynomial order depends on the memory delay. The central hypothesis is that the largest portion of nonlinearity is concentrated in the current sample, while older delays can be represented with lower orders. The methodology was evaluated in software through least squares identification and validation with the Normalized Mean Square Error (NMSE) metric, in addition to a fixed-point VHDL implementation for hardware feasibility analysis. The results indicate that the decreasing distribution of orders along memory preserves model accuracy, improves the performance-to-coefficient ratio, and reduces structural complexity, with gains also observed after logic synthesis. Together, the evidence shows that the selective adjustment of orders along memory constitutes a consistent strategy to approximate modeling performance and implementation efficiency.

**KEYWORDS**

Digital pre-distortion, power amplifier, Memory Polynomial, NMSE, VHDL

## 1 Introduction

Power amplifiers operating near saturation exhibit pronounced nonlinearity and memory effects, which compromise the spectral quality of broadband signals. In modern wireless communication systems, this behavior becomes particularly critical, as spectral spreading and envelope distortion degrade transmission efficiency and hinder coexistence with adjacent channels. In this scenario, digital pre-distortion relies on mathematical models capable of representing amplifier behavior with good precision and computational cost compatible with practical implementation.

[1] early showed that memory modeling is essential for pre-distortion of broadband signals. Later, [2] consolidated this line by treating behavioral modeling and baseband pre-distortion as central elements in the design of linearizers for RF amplifiers. In a broader design perspective, [3] and [4] discuss how trade-offs between linearity, efficiency, and complexity condition the choice of mathematical model and implementation architecture.

Within this context, the Memory Polynomial has become a particularly attractive solution for combining good representation capacity with relatively simple estimation. In practical applications, [5] shows the importance of viable models for FPGA implementation, while [6] explores extensions based on Volterra series to improve the behavioral description of power amplifiers. In the national academic scope, [7], [8], and [9] reinforce the relevance of memory models in different identification and linearization strategies. Already [10] explicitly highlights the potential to reduce the complexity of the memory polynomial without significantly losing performance.

Despite these advances, the traditional MP formulation adopts the same polynomial order for all memory branches, which may impose unnecessary operations when the contribution of older delays is already small. This work therefore investigates an alternative formulation in which the maximum order is defined individually for each delay, concentrating greater complexity only on the most relevant terms.

In addition to algorithmic interest, this issue is particularly important when the model needs to be transported to digital platforms with constraints on area, operating frequency, and power consumption. In such scenarios, the number of coefficients, the depth of the multiplication chain, and the volume of registers cease to be secondary details and directly influence the viability of the solution. Thus, a slightly simpler model may be preferable to another marginally more accurate when the loss in NMSE is small and the gain in implementation cost is expressive.

With this background, the objective of this paper is to gather the main theoretical, experimental, and hardware results associated with the delay-dependent order hypothesis. The central contribution is not restricted to the mathematical formulation of the model, but also includes a joint reading between identification performance, parametric sensitivity, and architectural impact. In this way, the analysis seeks to answer not only whether the model reduces error, but whether this reduction remains technically justifiable when observed from the digital implementation viewpoint.

## 2 Premise

The central premise is that the most intense nonlinearity is in the current sample, so older delays can use lower orders. This hypothesis aligns with reported modeling results and complexity

reduction strategies. Under this, the search for efficient configurations considers structural cost, using the Pareto frontier to identify better performance-complexity trade-offs.

This premise fits the physical interpretation of many power amplifiers with short memory, where thermal and electrical mechanisms leave a temporal signature that becomes less intense with delay. Employing identical orders in all delays overparameterizes the problem.

From identification, specific orders per delay reduce uninformative terms, containing collinearity and clarifying coefficient interpretation. Instead of expanding indiscriminately, the proposal organizes complexity by expected relevance.

## 3 Methodology

The proposed model is described by

$$y(n) = \sum_{m=0}^{M} \sum_{p=1}^{P_m} h_{p,m} x(n-m)\ |x(n-m)|^{p-1}, \qquad (1)$$

where $P_m$ represents the maximum order associated with delay $m$. The classic MP is recovered as a particular case when all orders are equal. The main advantage of this formulation is to preserve linearity in the parameters, allowing coefficient estimation by least squares with a potentially smaller regression matrix than the conventional model.

For experimental evaluation, models with memory depth $M = 2$ and order combinations $(P_0, P_1, P_2)$ ranging from 1 to 5 were considered. This choice produces a sufficiently broad search space to evidence sensitivity trends, without compromising comparative analysis between configurations. The adopted strategy consisted of estimating each configuration independently, recording its NMSE, and then relating this performance to the number of coefficients employed by the model. In this way, it was possible to observe not only which configuration offers the lowest error, but which ones remain competitive when incorporating structural cost into the analysis.

Performance was measured through NMSE,

$$\mathrm{NMSE} = 10 \log_{10} \left( \frac{\sum |e(n)|^2}{\sum |y_{\mathrm{real}(n)}|^2} \right), \qquad (2)$$

comparing the measured amplifier output with the model-estimated output. Since NMSE normalizes the error energy by the reference signal energy, it allows direct comparison of models with different numbers of terms and different parameterization strategies. More negative values indicate better adherence between the model and the observed amplifier behavior.

In addition to software evaluation, two architectures were described in VHDL: the original MP version and the truncated version with delay-dependent orders. In hardware implementation, the focus was to verify how selective order reduction impacts the main synthesis metrics. This step is important because the practical usefulness of a behavioral model does not depend only on its fitting quality, but also on the possibility of being implemented with predictable cost on reconfigurable or dedicated platforms.

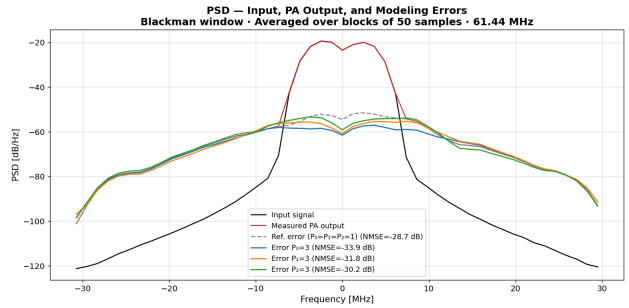


Figure 1: Spectral comparison between input signal, measured amplifier output, and modeling errors for different order configurations.

In terms of workflow, the methodology can be summarized in four steps: definition of candidate order sets; coefficient estimation by least squares; performance evaluation via NMSE; and finally, comparison between algorithmic cost and implementation cost. This chaining allows the analysis to go beyond the purely numerical level and reach a design perspective, more appropriate for digital pre-distortion applications in real systems.

## 4 Results

The experiments showed that model complexity should be concentrated in the current instant. In the analyzed LDMOS set, a complete model with $(P_0, P_1, P_2) = (5, 5, 5)$ reached NMSE of −38.47 dB, but the coefficient energy analysis indicated monotonic decay along delays. NMSE sensitivity confirmed this behavior, as illustrated in Fig. 2: when varying each branch individually between 1 and 5, the gain associated with $P_0$ was 6.66 dB, while $P_1$ and $P_2$ produced gains of 3.43 dB and 1.49 dB, respectively.

This result is relevant because it shows that the best absolute performance does not necessarily coincide with the most efficient configuration. Although the complete configuration is still the reference for highest accuracy, the difference between it and well-chosen truncated models becomes relatively small when compared to the complexity reduction obtained. In other words, a significant portion of the modeling capacity is already captured by a reduced set of terms, as long as the order distribution respects the relative importance of each delay.

In addition to NMSE in the time domain, spectral analysis reinforces this interpretation. When observing the power spectral density of the signals involved, it is noted that configurations with better performance reduce modeling error also in regions adjacent to the main band, which is particularly relevant for digital pre-distortion applications, as shown in Fig. 1. The spectral evidence shows that increasing order in more important branches shifts the error to lower levels, while increments in less relevant delays produce comparatively modest gains.

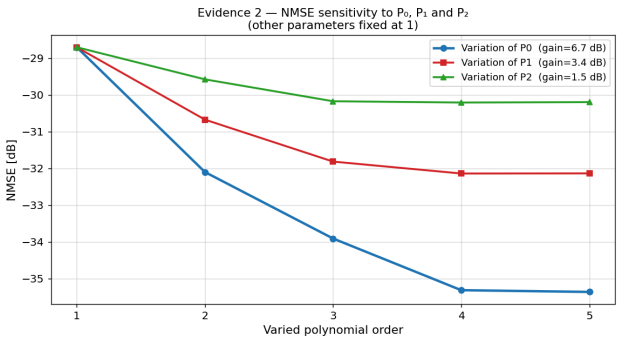


Figure 2: NMSE sensitivity to orders $P_0$, $P_1$, and $P_2$, highlighting the predominance of the current instant.

| Configuration | Coefficients | NMSE GaN | NMSE LDMOS |
|---|---|---|---|
| $(1, 1, 1)$ | 3 | $-21,66$ dB | $-28,71$ dB |
| $(3, 2, 1)$ | 6 | $-25,53$ dB | $-34,75$ dB |
| $(4, 3, 2)$ | 9 | $-25,64$ dB | $-36,31$ dB |
| $(5, 3, 2)$ | 10 | $-25,49$ dB | $-37,00$ dB |
| $(5, 5, 5)$ | 15 | $-26,10$ dB | $-37,51$ dB |

Table 1: Modeling performance for different order configurations and numbers of coefficients.

Fig. 1 shows that a large part of the gain can be obtained with intermediate models, without the need to keep the maximum order at all delays. Configurations with decreasing orders preserve the observed trend and approach the performance of the complete model with a smaller number of coefficients.

In the exhaustive evaluation of 125 combinations, models such as $(3, 2, 1)$, $(4, 3, 2)$, and $(5, 3, 2)$ offered the best compromise between number of coefficients and performance. In both GaN and LDMOS, the parameter $P_0$ was primarily responsible for the NMSE improvement, while older delays quickly saturated at lower orders.

Another important aspect of the analysis is that the ranking of the best solutions does not depend only on the device under consideration, since the global trend remains consistent across the evaluated datasets. This strengthens the interpretation that the delay-dependent order hypothesis is not a one-off adjustment to a specific experiment, but rather a structural regularity of the modeling problem. Even when the absolute NMSE values vary across technologies, the relevance hierarchy among the memory branches remains similar.

From a design perspective, this stability is particularly useful. If the optimal configuration changed abruptly across different datasets, the proposal would have limited value as a model synthesis guideline. However, the recurrence of solutions with decreasing orders indicates a robust practical directive: starting with a higher order at zero delay and progressively reducing complexity in subsequent delays tends to produce competitive solutions already in the first design iterations.

## 5 Hardware Evaluation and Pareto

The VHDL synthesis evaluation compared the classic MP architecture with the truncated version with delay-dependent orders. The $(5, 3, 2)$ configuration reduces by about 40% the main synthesis resources, maintaining NMSE close to the complete model, as shown in Fig. 2. This result reinforces that algorithmic simplification also translates into effective cost reduction in digital implementation.

From an architectural viewpoint, this reduction should not be interpreted only as savings in stored coefficients. The order reduction in less relevant branches implies fewer partial products, lower adder depth, and lower pressure on intermediate registers. In practice, this contributes to simplifying the data path and may facilitate timing closure in more aggressive frequency implementations.

Fig. 2 shows the comparison of hardware resources between the complete MP architecture and truncated versions.

| Architecture | Coef. | Reduction | Cells | Registers |
|---|---|---|---|---|
| MP complete $(5, 5, 5)$ | 15 | – | 100% | 100% |
| MP truncated $(5, 3, 2)$ | 10 | 40% | 60% | 60% |
| MP truncated $(4, 3, 2)$ | 9 | 40% | 58% | 58% |

Table 2: Comparison of hardware resources between the complete MP architecture and truncated versions.

The Pareto frontier between hardware complexity and NMSE performance reveals that $(4, 3, 2)$ and $(5, 3, 2)$ dominate the solution space, as seen in Fig. 3. Configurations with higher orders in less relevant delays require more resources without proportional gains. Thus, selective polynomial order reduction preserves the useful model performance while favoring more compact architectures.

The Pareto frontier represents the set of non-dominated solutions in the multi-objective optimization space, where no point can be improved in one criterion without worsening in the other. In this work's context, it highlights that configurations with orders decreasing along memory delays offer the best balance between modeling precision and structural efficiency, avoiding unnecessary overparameterizations.

In the VHDL implementation, the truncated version maintained functional equivalence with the Python reference model and presented reductions close to 40% in main synthesis metrics, including wires, wire bits, cells, and registers. These results show that reducing polynomial order in older delays does not represent only algorithmic savings, but also concrete digital architecture simplification.

This result has direct practical implications for embedded systems and transmitters with resource constraints. In many cases, a small NMSE loss is acceptable as long as the model continues to satisfy the system's linearization requirements and allows a more

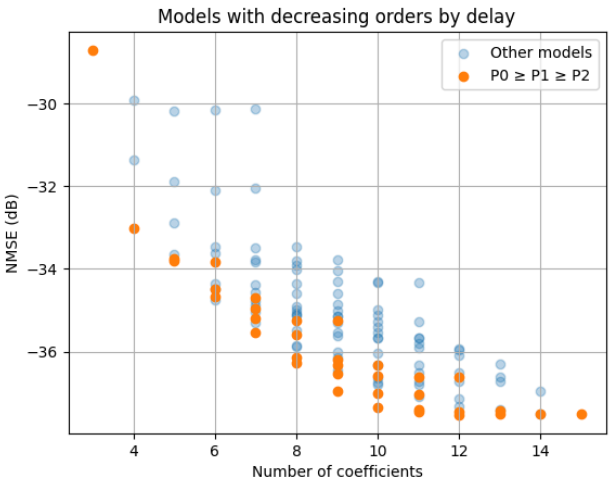


Figure 3: Pareto frontier illustrating the trade-off between model complexity (number of coefficients) and modeling performance (NMSE) for different polynomial order configurations.

compact and energy-efficient implementation. The Pareto frontier helps precisely formalize this decision, replacing intuitive choices with a quantitative comparison criterion between performance and cost.

## 6 Discussion

The results allow interpreting the proposal from modeling and implementation perspectives. The delay-dependent order model reorganizes complexity coherently with observed relevance. By reducing low-contribution terms, it transforms conceptual gain into measurable hardware savings.

The work does not claim all amplifiers should use the same profile. The results suggest a guideline: polynomial order need not be uniform, and assuming uniformity may mask efficient solutions. As memory depth grows, this becomes more valuable to avoid indiscriminate expansion.

The joint analysis reinforces model choice as an engineering compromise, interpreting fitting quality alongside constraints. The proposed model internalizes this in the behavioral structure design.

## 7 Conclusion

The study confirms that the MP model with delay-dependent polynomial order is an efficient alternative for behavioral modeling of power amplifiers. The proposal preserves the precision of the classic MP, reduces the number of necessary terms, and favors more compact digital implementations. Sensitivity results showed that the greatest contribution to NMSE improvement is concentrated in the branch associated with the current instant, while older delays can be represented with lower orders without proportional performance loss.

From the implementation viewpoint, the VHDL analysis demonstrated that this complexity reorganization is not only a mathematical simplification, but a concrete architectural advantage. Configurations such as $(4, 3, 2)$ and $(5, 3, 2)$ stood out for combining good modeling performance with expressive synthesis resource reduction, making them particularly attractive for practical digital pre-distortion applications. As a consequence, the work offers a promising basis for applications with area and consumption constraints, maintaining consistency both in software evaluation and hardware validation.

## 8 Acknowledgments

This study was financed in part by the National Council for Scientific and Technological Development and by the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior – Brasil (CAPES) – Finance Code 001.

## 9 References

[1] J. Kim and K. Konstantinou, "Digital predistortion of wideband signals basedon power amplifier model with memory," *Electronics Letters*, vol. 37, no. 23, pp. 1417–1418, 2001, doi: 10.1049/el:20010940.

[2] E. G. de Lima and G. Ghione, "Behavioral modeling and digital base-band predistortion of RF power amplifiers," Doctoral dissertation, 2009.

[3] S. C. Cripps, *RF power amplifiers for wireless communications.* Artech House, 2006, p. 456.

[4] P. Kenington, *High Linearity RF Amplifier Design.* Artech House Publishers, 2000.

[5] A. Kwan, F. Ghannouchi, O. Hammi, M. Helaoui, and M. Smith, "Look-up table-based digital predistorter implementation for field programmable gate arrays using long-term evolution signals with 60 MHz bandwidth," *IET Science, Measurement & Technology*, vol. 6, no. 3, pp. 181–188, 2012, doi: 10.1049/iet-smt.2011.0025.

[6] E. J. Bonfim and E. G. de Lima, "A Modified Two Dimensional Volterra-Based Series for the Low-Pass Equivalent Behavioral Modeling of RF Power Amplifiers," *Progress In Electromagnetics Research M*, vol. 47, pp. 27–35, 2016, doi: 10.2528/PIER-M15122806.

[7] E. John, "Modelagem comportamental de amplificadores de potência de radiofrequência usando termos unidimensionais e bidimensionais de séries de Volterra," Master's thesis, 2016.

[8] C. Luiza and R. Machado, "Modelagem comportamental de amplificadores de potência usando soma de produtos entre filtros digitais de resposta ao impulso finita e tabelas de busca unidimensionais," Master's thesis, 2016. [Online]. Available: https://acervodigital.ufpr.br/xmlui/bitstream/handle/1884/46250/R%20-%20D%20-%20CAROLINA%20LUIZA%20RIZENTAL%20MACHADO.pdf?sequence=1&isAllowed=y)

[9] J. H. Chavez, "Estudo comparativo entre as arquiteturas de identificação de pré-distorcedores digitais através das aprendizagens direta e indireta," Master's thesis, 2018.

[10] L. Schuartz and E. Lima, "Polinômios com Memória de Complexidade Reduzida e sua Aplicação na Pré-distorção Digital de Amplificadores de Potência," Master's thesis, 2017.