


W.O.P.R. / divided storage and inset base

Seven RGB panels per side. Two main-cup layouts. Recessed screw heads. Gray and flush white text.


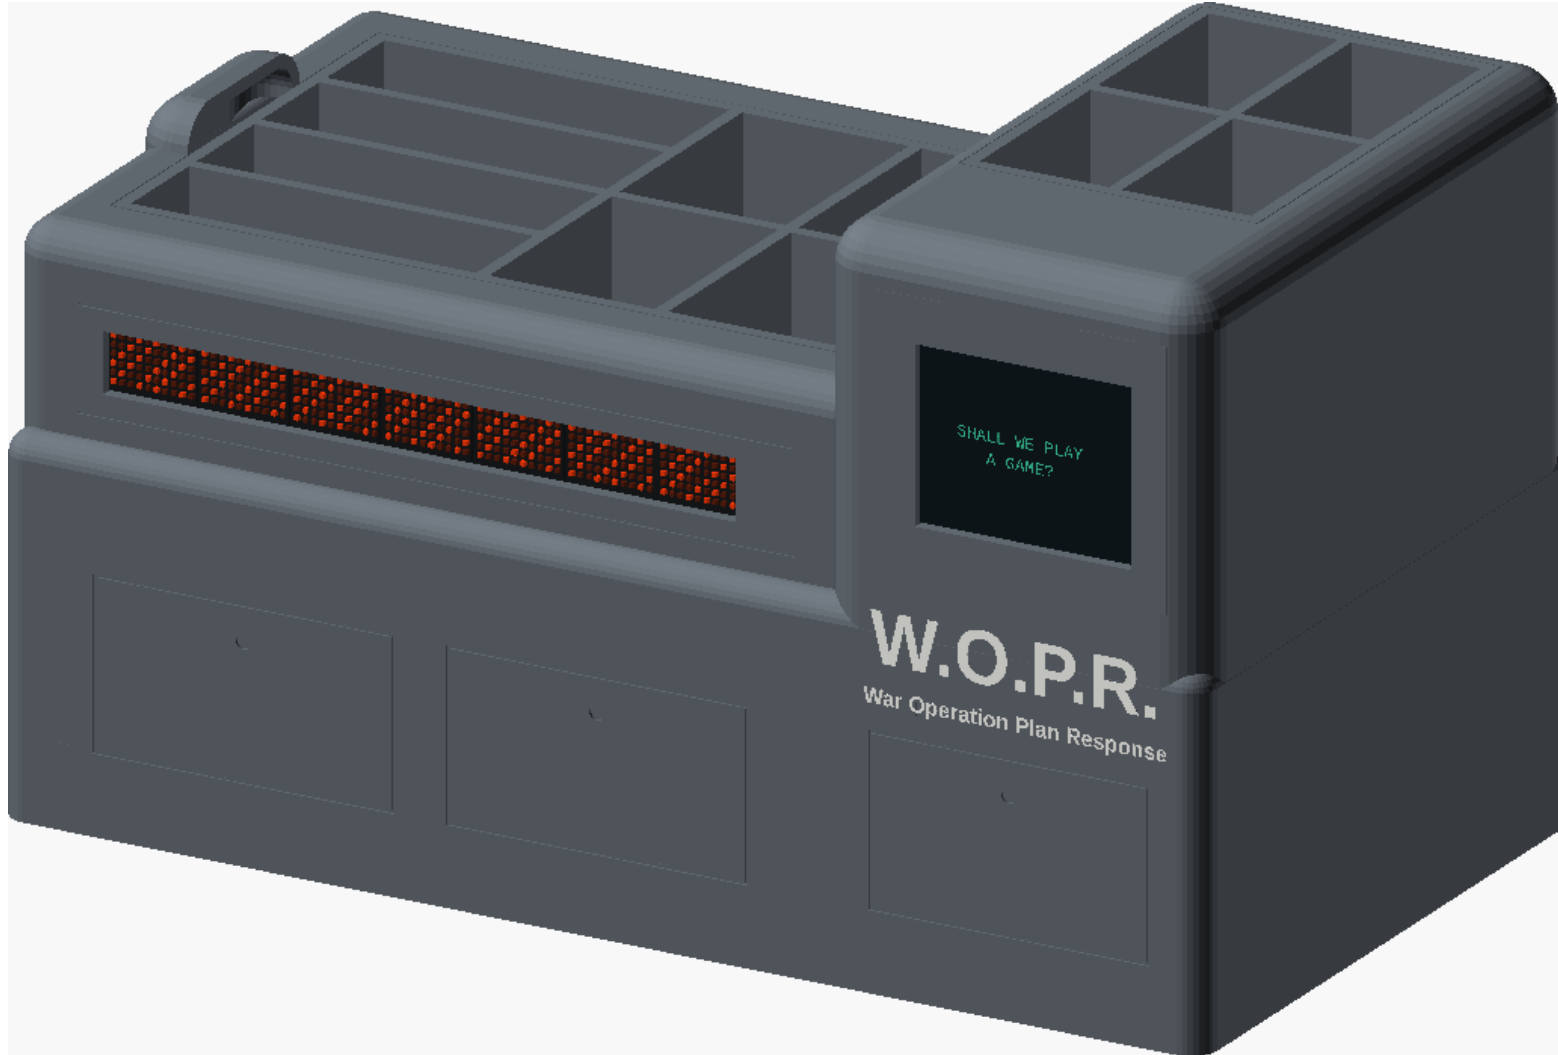


279.4 x 155 x 165 mm | 11.00 x 6.10 x 6.50 in | 3 mm nominal shell

OpenSCAD model render. Colored LEDs and display are hardware previews, not printed material.

Seven-panel banks, the same case

Fourteen boards total: seven adjacent boards behind one continuous window on each side.

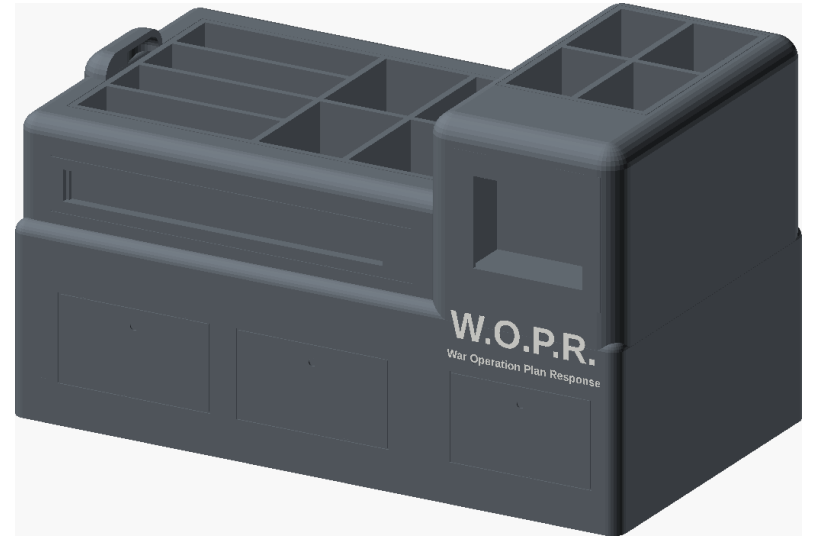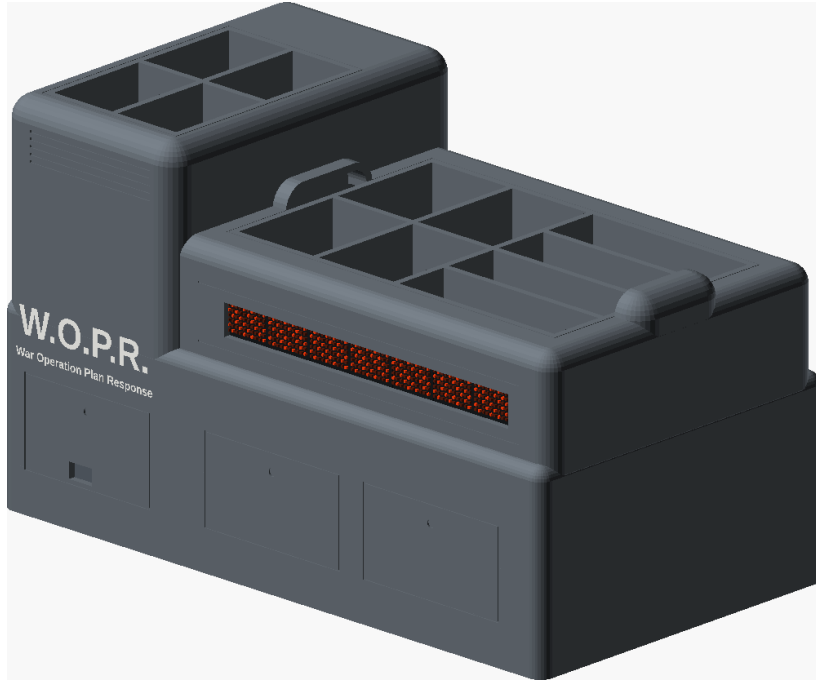

CASE WITHOUT ELECTRONICS

The tower cup has crossed dividers, making four deep compartments.

Both long sides carry white W.O.P.R. / War Operation Plan Response lettering.

The main touchscreen is on one side, directly above its logo.

Main cup: four shallow compartments in one half, four deep compartments in the other.


The inset base has 3 mm of screw-head space above the lower body edge.

Remove the pen cups and base for rear access. Fit the electronics first, then lower the cups into place.

Overall envelope and panel placement

All views below come from the same SCAD geometry. Dimensions are nominal, not a film-prop measurement.

PRIMARY LONG SIDE

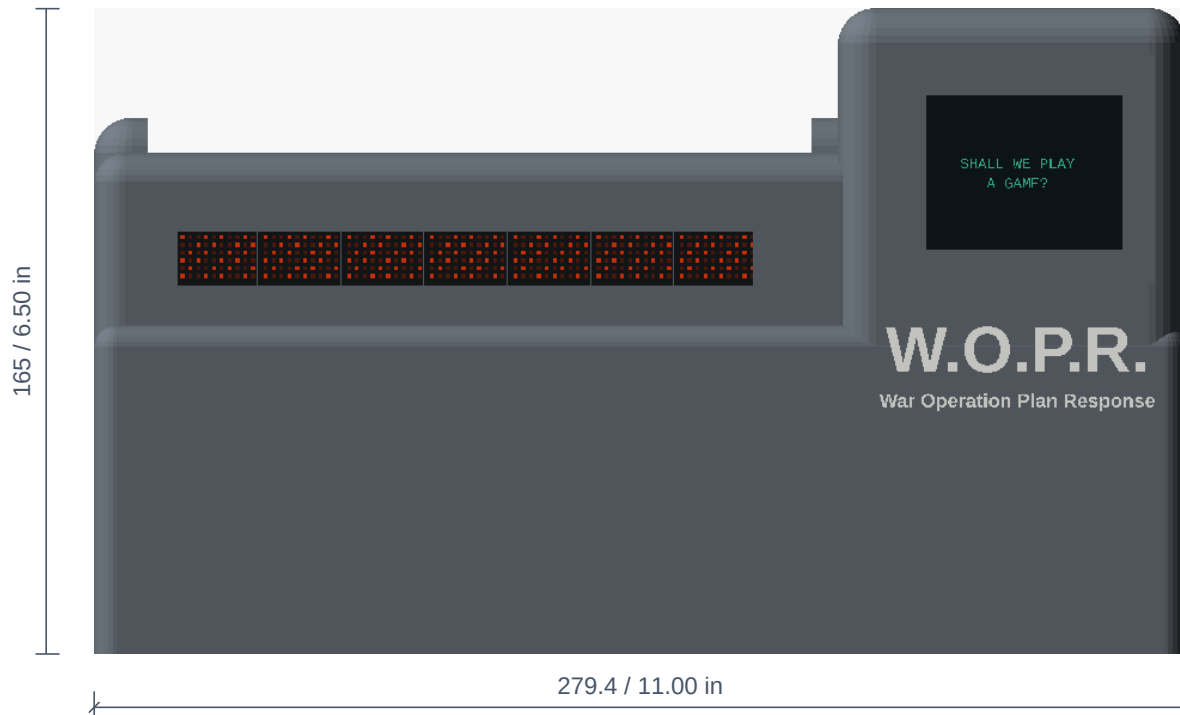


LED centers: $X = 31.235 + i \times 21.255$; $i = 0$ through 6.

TFT center: $X = 236$; $Z = 124$. Lower case top: $Z = 128$.

Spine top: $Z = 137$. Tower top: $Z = 165$.

Shell: 279.4 mm long. Inset base: 272.8 x 148.4 mm.

TOWER END

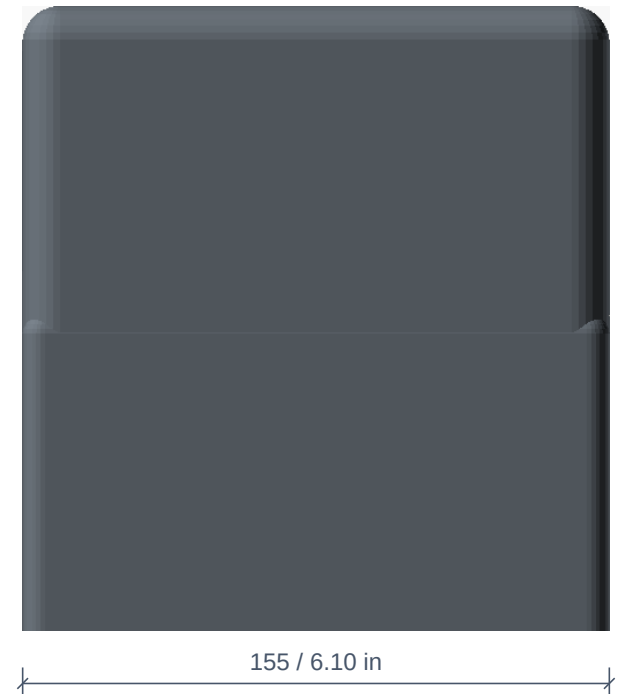

Rear TFT pocket: 65.6 x 53.6.

Front TFT window: 50.1 x 39.6.



Rear LED bank pocket:

149.085 wide x 18.38 high.

Top, rear and service access

Common axes: X along the 11-inch length, Y front to rear, Z up from the base.

PLAN SECTION / Z = 127

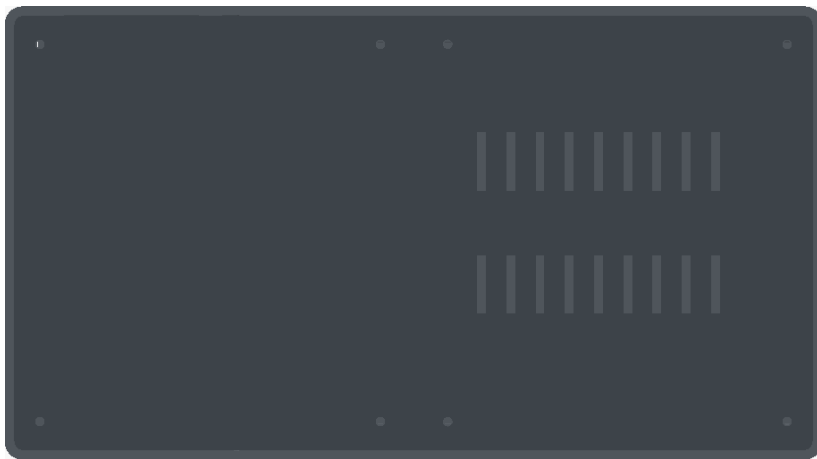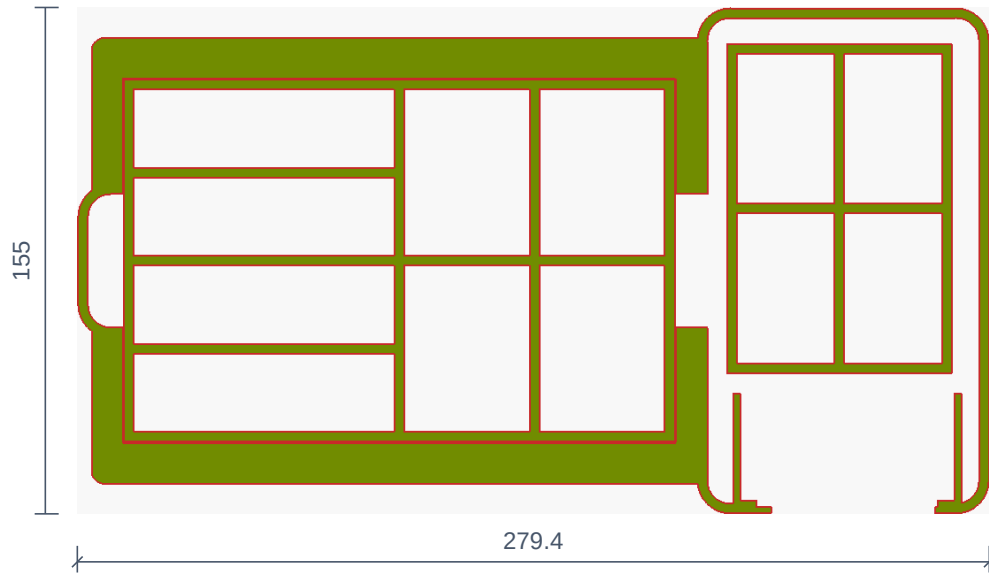

OPPOSITE LONG SIDE



BOTTOM / ONE REMOVABLE BASE

Main cup: 38.1 mm shallow / 85 mm deep.

Tower cup: crossed dividers, four deep cells.

Both cups have 3 mm walls, floors and dividers.

Lift the cups out to reach the rear fasteners.


Eight M3 base screws; 3.3 clearance / 2.5 pilots.

Cup-to-case clearance: 0.30 mm per side.


Both main-cup versions are included

Print either main-cup STL. Left/right is defined when looking at the W.O.P.R. logo side.

SHALLOW LEFT / FOUR SHALLOW + FOUR DEEP

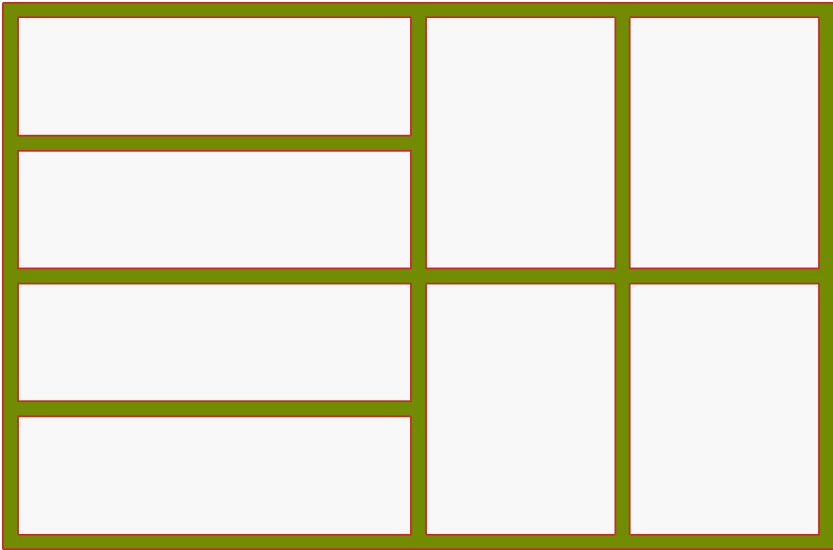


SHALLOW RIGHT / MIRRORRED LAYOUT

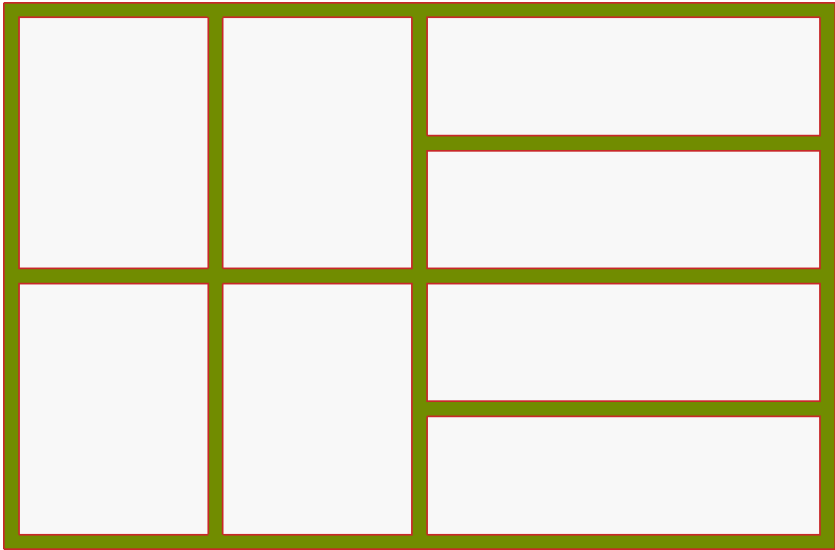

MAIN CUP SECTION / LEVEL RIM AT Z = 128



TOWER / FOUR COMPARTMENTS

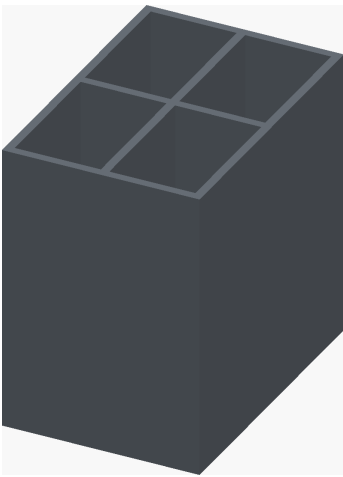


Shallow: 38.1 mm (1.50 in). Deep: 85 mm. Main-cup dividers: 3 mm thick.

The base sits inside the body

Exactly 3 mm from the underside of the plate to the bottom edge of the body.



SECTION THROUGH A FRONT BASE SCREW

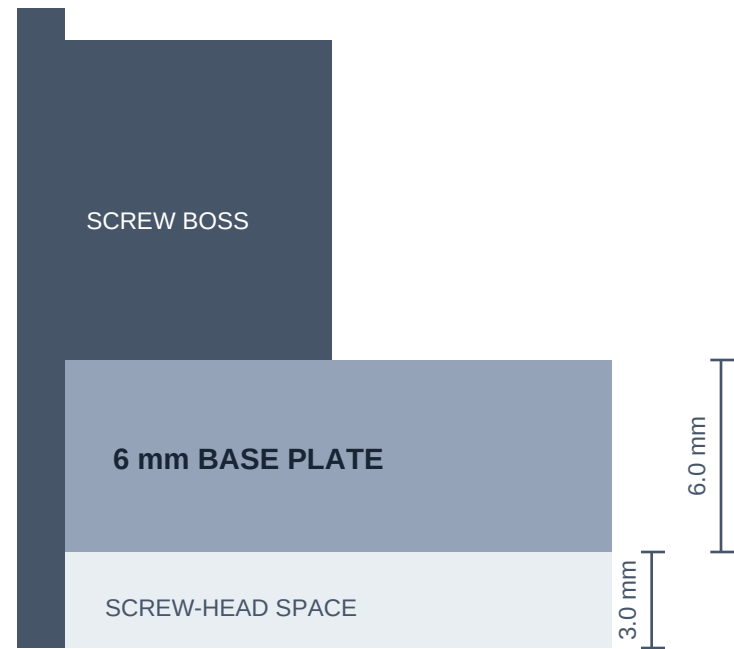

BODY BOTTOM / Z = 0

Base footprint: 272.8 x 148.4 mm, inside the 279.4 x 155 mm body.


3.3 mm inset per side = 3 mm shell wall + 0.3 mm assembly clearance.

Plate underside Z = 3. Plate top and screw-boss seats Z = 9.

Use M3 heads no taller than 3 mm; the old counterbores have been removed.

A full inch behind the display

Section through X = 236. The bay is open at the rear for wires and installation from below.

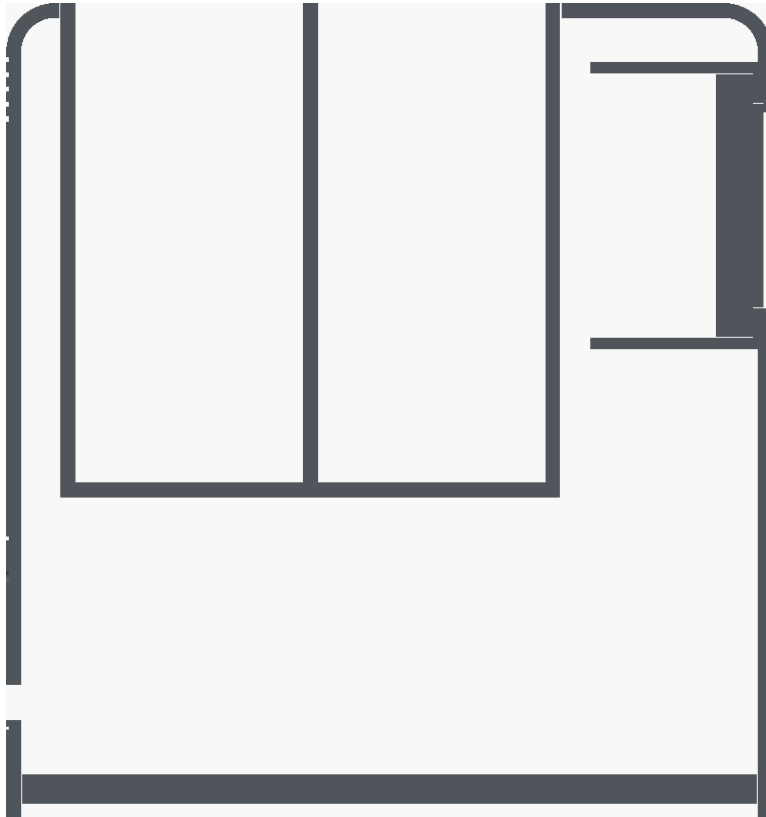

SCAD SECTION / LOOKING ALONG X

DEPTH CHAIN / DETAIL



Rear-loading pocket: 65.6 x 53.6; front bezel hides PCB.

Front opening: 50.1 x 39.6; left +4.5, right -1, top -2.

Four hidden blind pilots: diameter 1.8 for M2 screws.

V2 hole pitch: 59.690 x 47.498 (landscape).

Front glass is nominally 2 mm below the case face.


Tower cup starts at Y = 43, beyond the 36.9 mm bay.

The 25.4 mm bay excludes the 9.5 mm hardware depth.

Mount positions follow manufacturer CAD; assembly thickness and tolerances still need a physical check.

Install from the inside

Rear access shown with the base and removable pen cups removed. Physical fit remains untested.

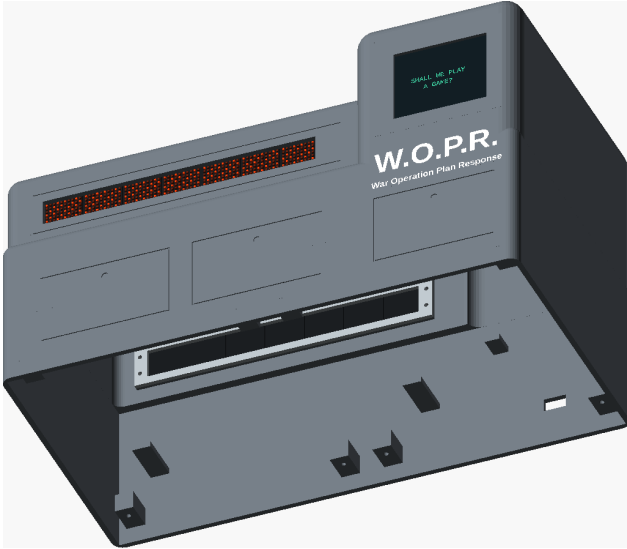

UNDERSIDE / REAR MOUNTING ACCESS

PRINT FILES

OPEN wopr-parts.3mf alone in Bambu Studio.

gray-shell.stl: one continuous structural case.

white-text.stl: aligned lettering; import with gray-shell.

base.stl: one continuous removable underside.

cup-main-shallow-left / shallow-right: choose ONE.

cup-tower.stl: four compartments with crossed dividers.

led-retainer.stl: print two; screws enter from inside.

3 mm walls/dividers. White text: 0.8 mm deep, flush.

No splice strips. Test fit-coupon.stl before the case.

Shell and base need a 280 x 155 mm area, plus brim.

Assign the two filament colors explicitly in the slicer.

CHECKED: Eight STL exports are watertight; each structural part is a single solid.

CHECKED: 3 mm base recess, 38.1 mm shallow cells, dividers and mounting clearances.

NOT CHECKED: Actual print, hardware fit, touch access, electrical power or operating temperature.

Proportions are adapted from visual references. This is a review draft, not a measured replica.

SOURCES / MANUFACTURER DATA AND VISUAL REFERENCE

Seed product + board CAD	https://wiki.seeedstudio.com/rgb_matrix_for_xiao/
Adafruit #3315 / 65 x 53 x 9.5 mm	https://www.adafruit.com/product/3315
Adafruit V2 mounting geometry	https://github.com/adafruit/Adafruit-2.4-TFT-FeatherWing-PCB
Miniatua / visual proportions only	https://www.miniatua.com/work/wopr/