Q.5 Let signals $x(t) = 40\ \mathrm{sinc}(20t-1)$ and $y(t) = x(t)\cos\left(2\pi \times 10^3 t\right)$.

(a) Find the Fourier transform of $x(t)$.

(7 marks)

(b) Find the Fourier transform of $y(t)$ and plot its spectrum with proper labeling.

(13 marks)

Q3. Consider the time-domain periodic signal, $x(t) = 2 + \cos\left(12t + \frac{\pi}{3}\right) + \sin(16t)$.

(a) The complex exponential Fourier series expansion of $x(t)$ is given by :

$$x(t) = \sum_{k=-\infty}^{\infty} c_k \exp\left(j2\pi \frac{k}{T_p} t\right).$$

Find T_p and c_k.

(5 marks)

(b) Determine the Fourier transform $X(f)$ of $x(t)$.

(2 marks)

(c) Sketch the magnitude spectrum and phase spectrum of $x(t)$ with proper labelling.

(3 marks)

Q6. The signal $x(t)$ whose spectrum $X(f) = A \cdot \mathrm{rect}\left(\frac{f+f_a}{\alpha}\right) + B \cdot \mathrm{tri}\left(\frac{f+f_b}{\beta}\right)$ is shown in Figure Q6 below.

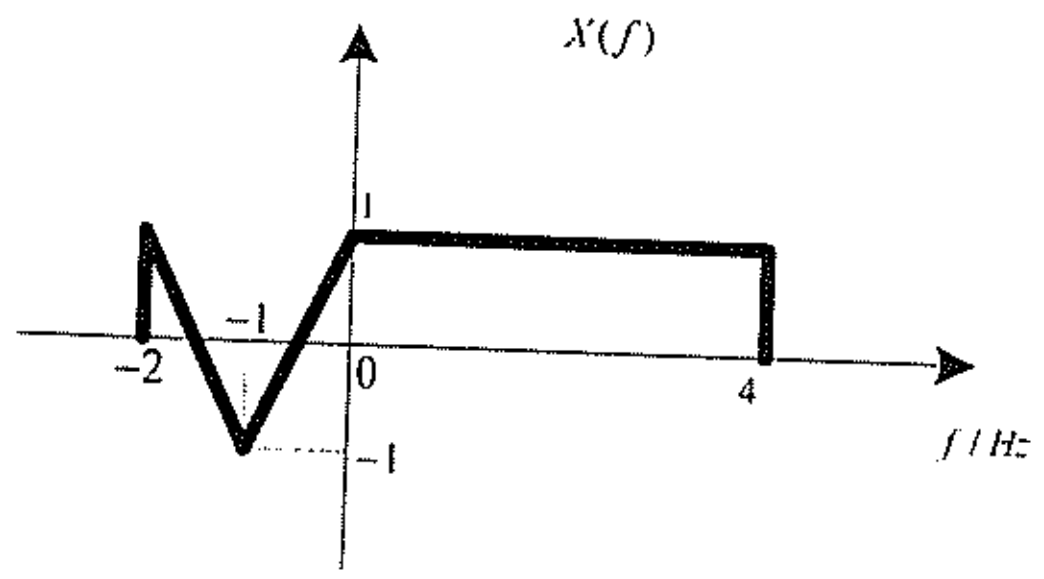

Figure Q6

(a) Find the values of the parameters A, f_a, α, B, β and f_b.

(6 marks)

(b) Find the time domain signal, $x(t)$, of $X(f)$?

(8 marks)

(c) Signal $y(t) = x(t)e^{j2\pi t} - 6\mathrm{sinc}(6\overset{t}{\cancel{f}})e^{j4\pi t}$. Sketch the magnitude and phase spectra of $y(t)$ with proper labelling.

Q3. The spectrum, $X(f)$, of an energy signal, $x(t)$, is given by

$$X(f) = \cos(\pi f)\operatorname{rect}(f) * \left[-\frac{1}{2}\delta(f+1) + \delta(f) - \frac{1}{2}\delta(f-1) \right].$$

(a) Sketch the magnitude spectrum, $|X(f)|$, and phase spectrum, $\angle X(f)$, of $x(t)$. Label your sketch clearly and adequately.

(6 marks)

(b) Compute the energy of $x(t)$ contained within its 1st-null bandwidth.

(4 marks)

Q3. Consider the signal $x(t)$ given by:

$$x(t) = 3 + je^{-j14t} + \cos\left(8t + \frac{\pi}{4}\right) + (2+3j)e^{j6t} - je^{j14t}$$

(a) What is the fundamental frequency of $x(t)$?

(2 marks)

(b) Obtain the Fourier series coefficients of $x(t)$.

(4 marks)

(c) Sketch the magnitude and phase spectra of $x(t)$.

(4 marks)

Q6. An energy pulse is modeled by $q(t) = \operatorname{sinc}^2(t) * [1.1\operatorname{sinc}(1.1t)]$, where '*' denotes convolution. The spectrum, $Q(f)$, of $q(t)$ is sampled in the frequency domain to form $X(f) = Q(f)\sum_k \delta(f - 0.1k)$. Let $x(t)$ denote the inverse Fourier transform of $X(f)$

.

(a) Draw a labeled sketch of the spectrum, $Q(f)$, of $q(t)$.

(4 marks)

(b) Draw a labeled sketch of the spectrum, $X(f)$, of $x(t)$.

(4 marks)

(c) By inspection of the sketch in Part (b), or otherwise, determine whether or not $x(t)$ is periodic. If $x(t)$ is periodic, find its fundamental frequency, its Fourier series coefficients, c_k, and its average power.

(12 marks)

Q.4 The continuous-frequency spectrum of a signal $x(t)$ is given by

$$X(f) = 2\delta(f+40) + 2\delta(f+30) + 3\delta(f+20) + 4 \\ +3\delta(f-20) + 2\delta(f-30) + 2\delta(f-40)$$

(a) Draw an adequately labeled sketch of the power spectral density, $P_x(f)$, of $x(t)$. (4 marks)

(b) What is the average power of $x(t)$? (2 marks)

(c) The 80% power containment bandwidth of a power signal is defined as the smallest bandwidth that contains at least 80% of the average signal power. What is the 80% power containment bandwidth of $x(t)$? (4 marks)

Q2. The Fourier transform, $X(f)$ of the signal $x(t)$ is a half-cosine shaped amplitude spectrum as shown in Figure Q2.

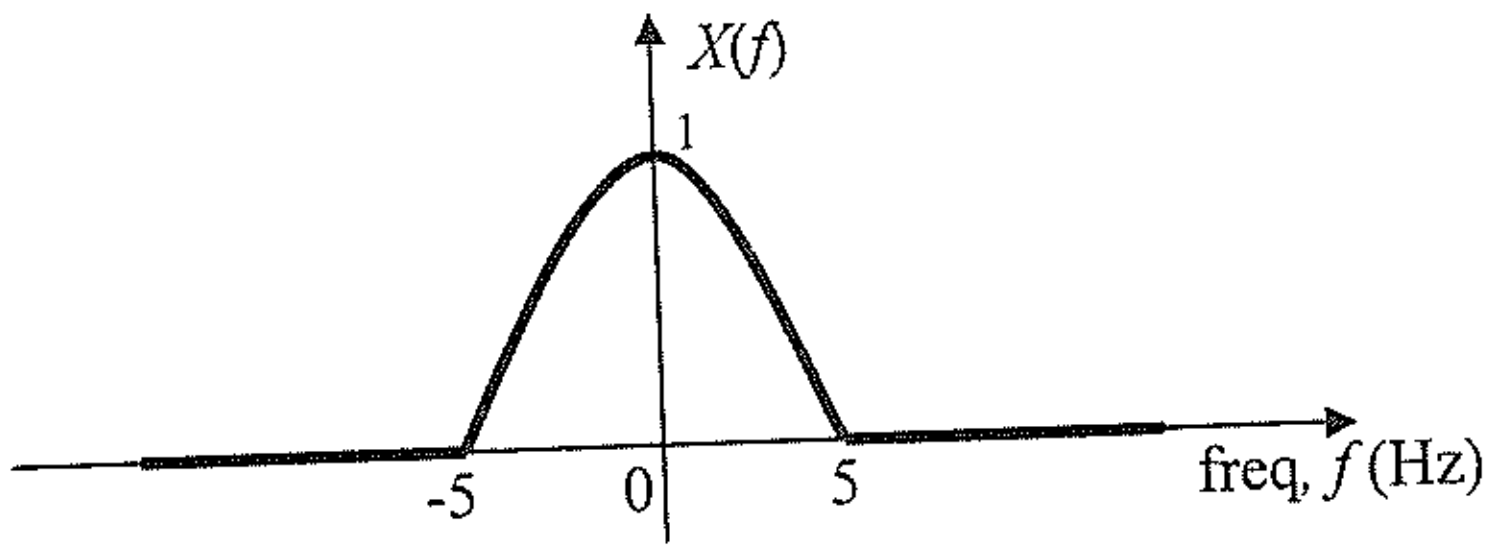

Figure Q2

(a) Provide the expression for $X(f)$ in terms of the frequency f. (2 marks)

(b) Derive the energy of the signal $x(t)$. (6 marks)

(c) The signal $x(t)$ is sampled at 15 Hz. Sketch the amplitude spectrum of the sampled signal. (2 marks)

Q2. Consider the periodic signal $x(t) = 10\sin(3t) + 4\cos\left(4.5t + \frac{\pi}{6}\right) + e^{j\left(t+\frac{\pi}{4}\right)} + 2$.

(a) Find the fundamental frequency, f_o, and period, T, of $x(t)$. (3 marks)

(b) Find the Fourier series coefficients, c_k, of $x(t)$ and find the Fourier transform, $X(f)$, of $x(t)$. (5 marks)

(c) Find the average power of $x(t)$.

Q7. (a) The amplitude spectrum of the signal $x(t)$ is shown in Figure Q7-1, and the signal $y(t) = x(t)\cos(40\pi t)$ is sampled at a frequency of 20 Hz to obtain the sampled signal $y_s(t)$.

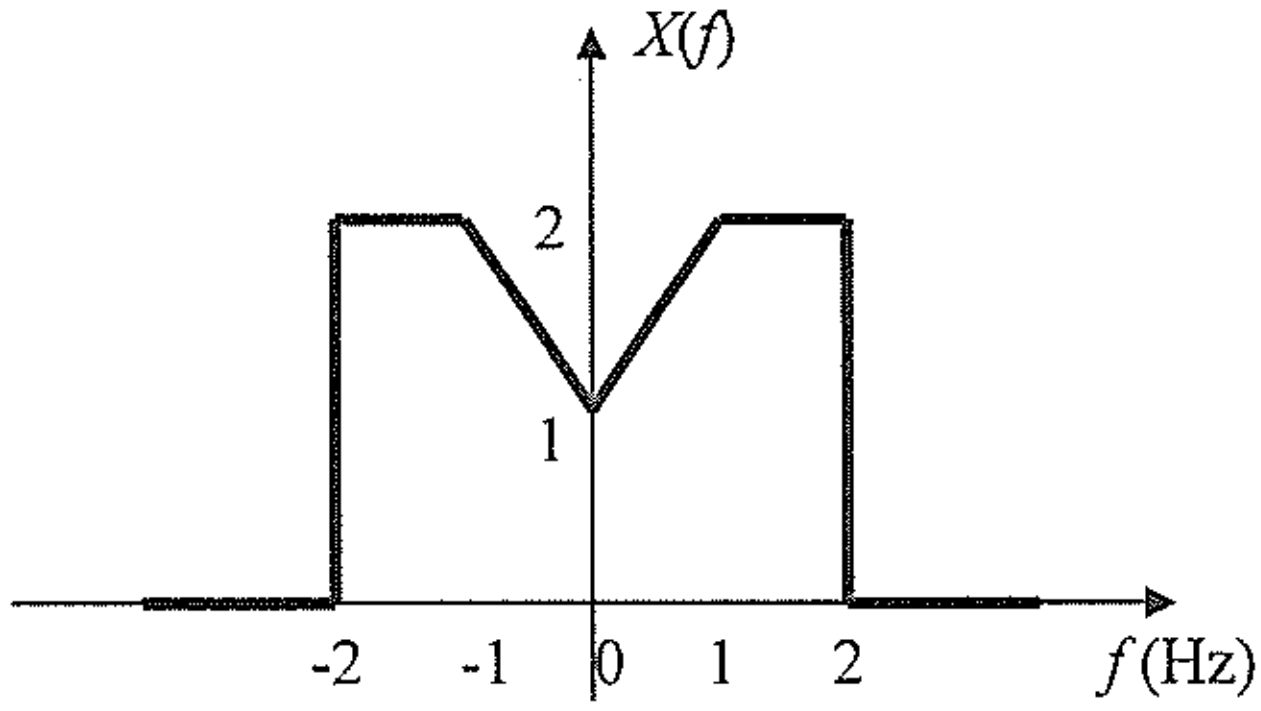

Figure Q7-1

i. What is the Nyquist frequency for signal $y(t)$?

(2 marks)

ii. The signal $y(t)$ is sampled at 20 Hz to give the signal $y_s(t)$. Determine the Fourier transform, $Y_s(f)$, of the sampled signal $y_s(t)$ and sketch its magnitude spectrum.

(6 marks)

iii. Can the signal $y(t)$ be recovered from the sampled signal $y_s(t)$? Explain your answer.

(2 marks)

(b) The amplitude spectrum of the signal $a(t)$ is shown in Figure Q7-2. Assume that the phase spectrum is zero.

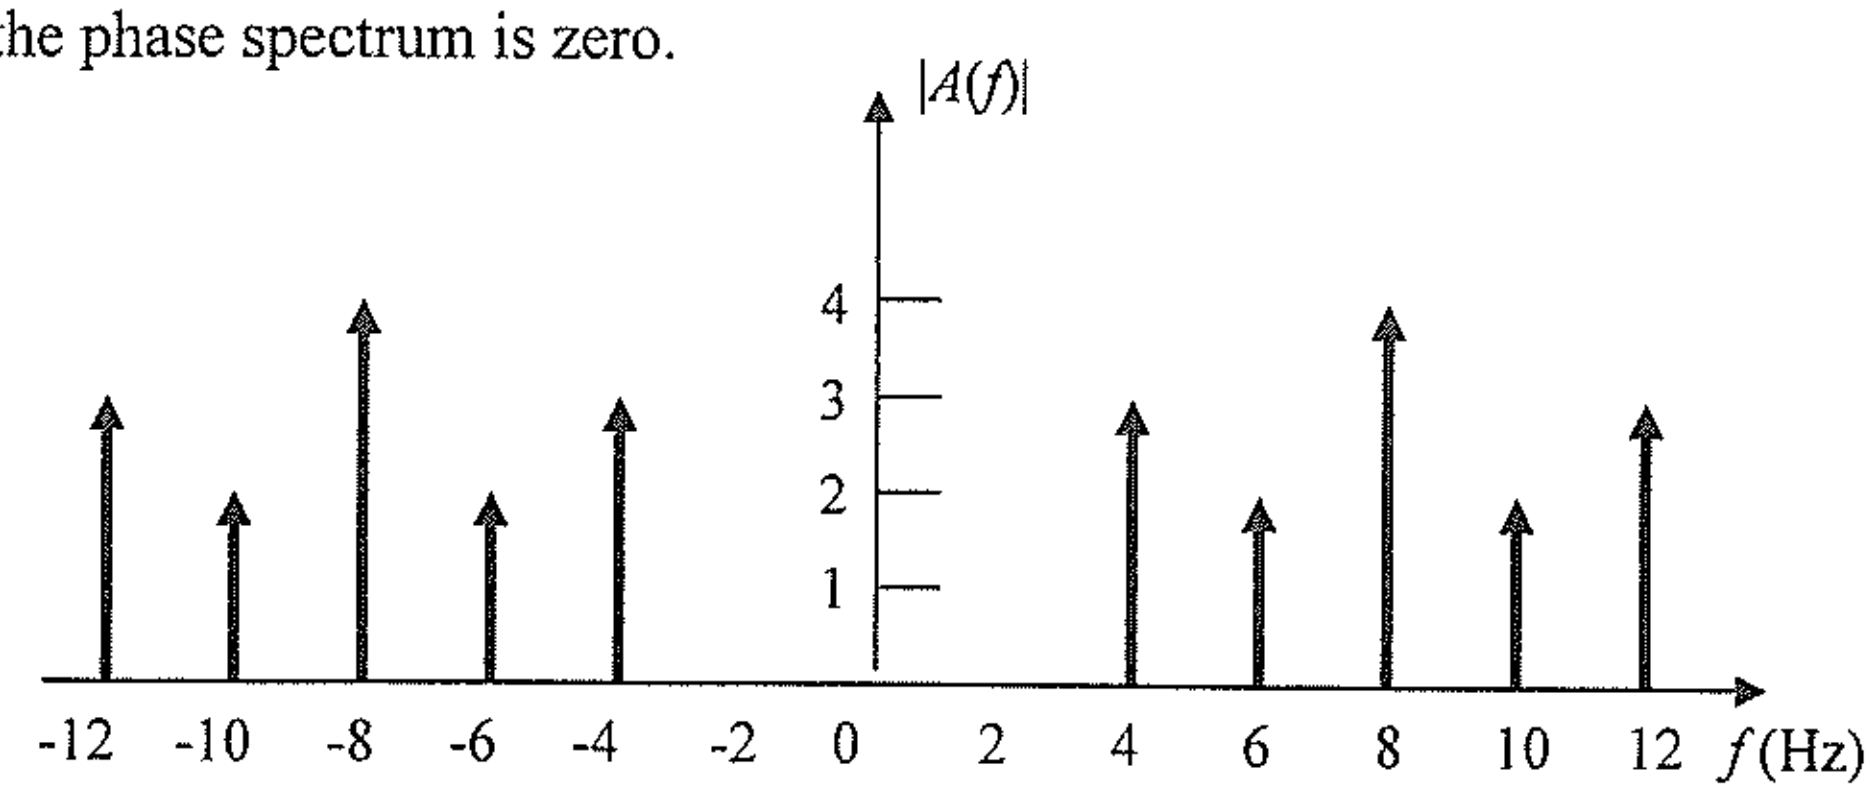

Figure Q7-2

i. Derive the signal $a(t)$.

(4 marks)

ii. Is $a(t)$ a power or an energy signal? Find the corresponding power or energy?

(4 marks)

iii. What is the bandwidth of the signal $a(t)$?

Q1. The spectrum, $X(f)$, of a periodic signal $x(t)$ is shown in Figure Q1.

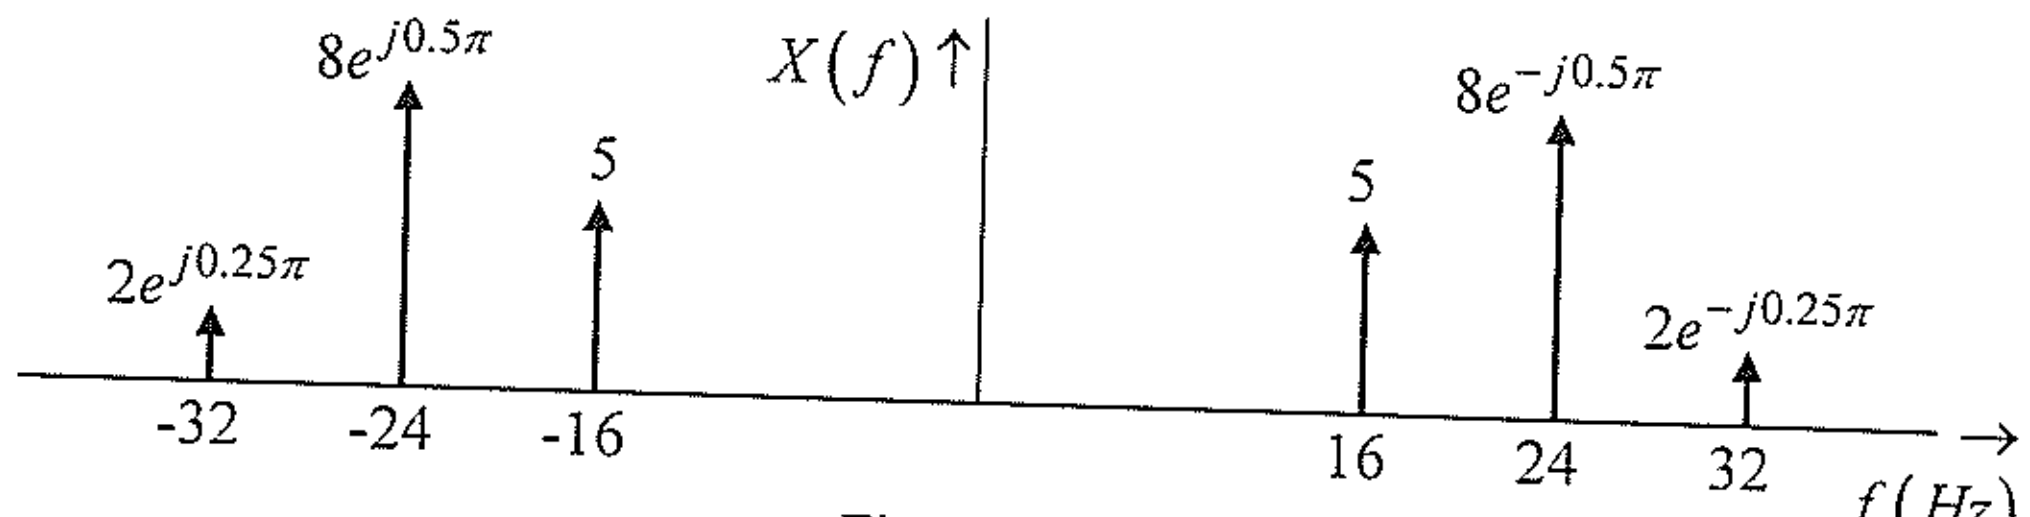

Figure Q1

(a) Find the dc value and average power of $x(t)$. (5 marks)

(b) Express $x(t)$ as a function of real sinusoids. (5 marks)

Q7. Two time-domain periodic signals are given by $x(t) = 2\text{sinc}(2.5t - 0.5) * \sum_{n=-\infty}^{\infty} \delta(t - 2n)$ and $y(t) = x(t)\cos(20\pi t)$.

(a) Find fundamental frequency, f_p, of $x(t)$ and its Fourier transform, $X(f)$.

(8 marks)

(b) Determine the complex exponential Fourier series coefficients, c_k, of $x(t)$ and sketch the magnitude spectrum of $x(t)$ with proper labelling. Find the power, P_1 of $x(t)$.

(6 marks)

(c) Derive the Fourier transform, $Y(f)$, of $y(t)$ in terms of $X(f)$ and find the power, P_2 of $y(t)$?

(6 marks)

Q.6 Suppose $x(t) = 2\text{sinc}(2t)$, $y(t) = \left[\sum_{k=-\infty}^{\infty} 2\,\text{rect}\left(\frac{t-4k}{2}\right)\right] - 1$ and $z(t) = x(t) \otimes y(t)$, where the symbol $\otimes$ denotes the convolution operator.

(a) Determine the Fourier transforms $X(f)$, $Y(f)$ and $Z(f)$ of $x(t)$, $y(t)$ and $z(t)$, respectively, and sketch their corresponding amplitude spectra.

(14 marks)

(b) Determine the average power of $z(t)$.

(3 marks)

(c) If $z(t)$ is sampled at a frequency of 2.5 Hz, sketch the amplitude spectrum of the sampled signal.

Q2. The energy spectral density of a signal $x(t)$ is given by

$$E_x(f) = 16\exp(-2|f|) \text{ Joules/Hz}.$$

(a) Find the 3dB bandwidth of $x(t)$. (5 marks)

(b) Find $X(f)$ if the phase spectrum of $x(t)$ is given by $\angle X(f) = -0.5f$. (5 marks)

Q2. Figure Q2 shows the half-cosine amplitude spectrum, $X(f)$, of the signal $x(t)$.

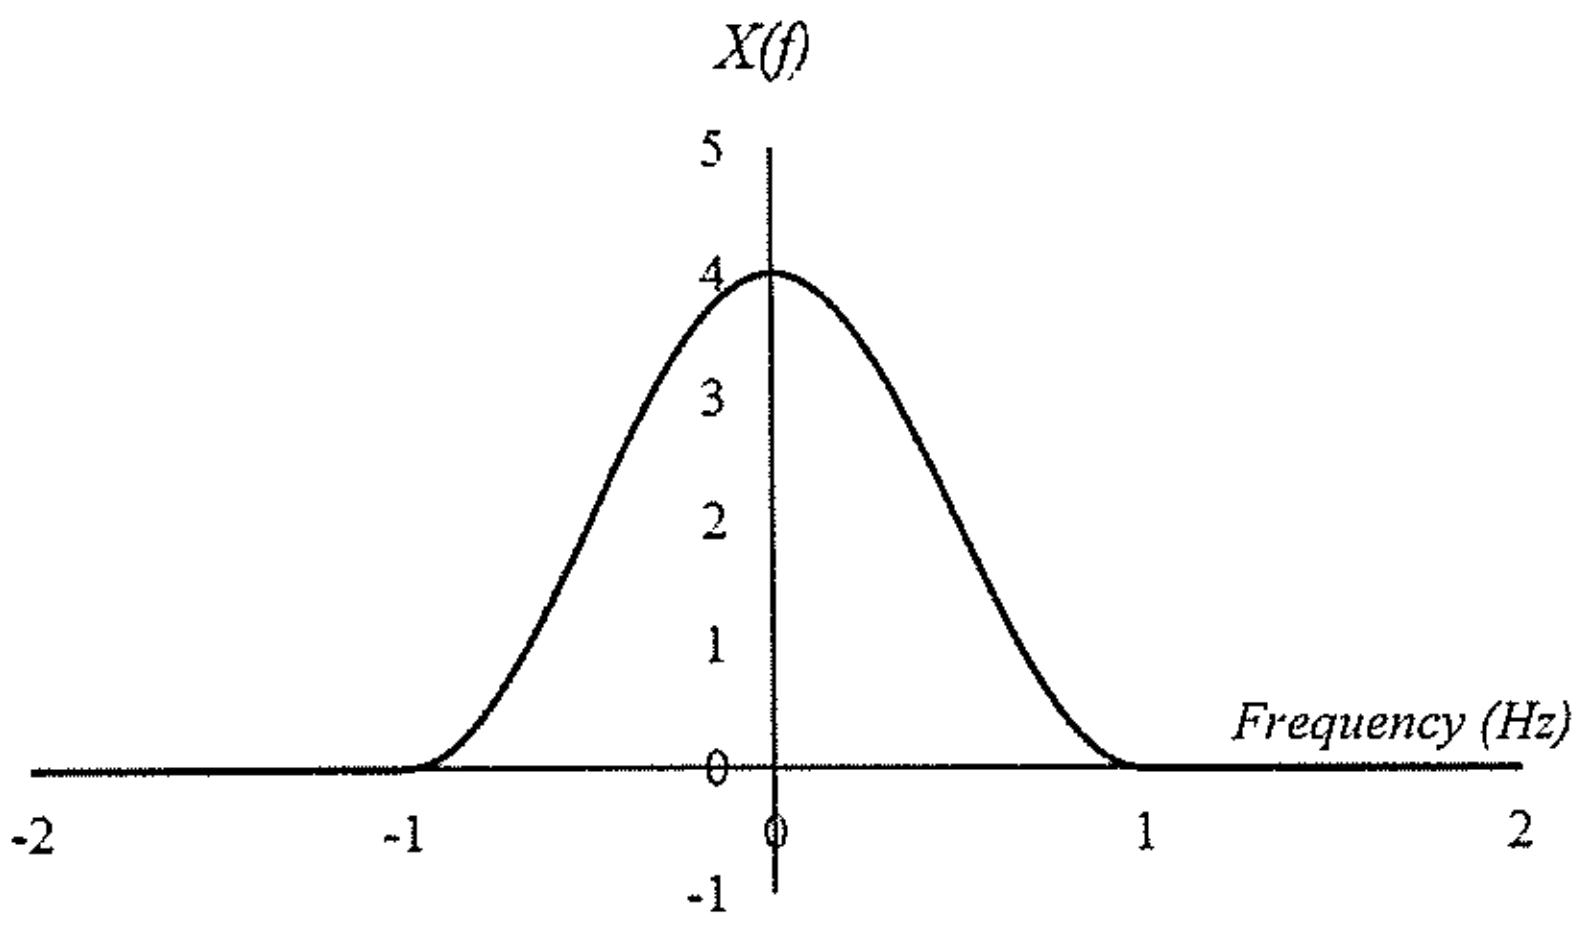

Figure Q2 : Amplitude Spectrum, $X(f)$

(a) What is the energy of signal $x(t)$? (3 marks)

(b) What is the 3dB bandwidth of signal $x(t)$? (3 marks)

(c) Determine the expression for signal $x(t)$. (4 marks)

Q7. A signal $x(t)$ is given by

$$x(t) = 4\cos(2\pi f_c t)\left[\operatorname{rect}\left(\frac{Wt}{2}\right) \otimes \operatorname{sinc}(2Wt)\right]$$

where f_c and W are positive real constants, $f_c >> W$, and the symbol $\otimes$ denotes convolution.

(a) Determine the Fourier transform, $X(f)$, of the signal $x(t)$.

(8 marks)

(b) Find the bandwidth of $x(t)$ and determine the corresponding Nyquist sampling frequency of $x(t)$.

(5 marks)

(c) If the signal $x(t)$ is sampled at a frequency of $2f_c$ to give the sampled signal $x_s(t)$, give the expression for the Fourier transform of $x_s(t)$.

(7 marks)

Q.1 The signal $x(t) = \operatorname{sinc}(2t)$ is sampled at 4 Hz to obtain the sampled signal, $x_s(t)$.

(a) Derive the Fourier transform, $X_s(f)$, of the sampled signal $x_s(t)$ and sketch its spectrum.

(6 marks)

(b) What is the Nyquist sampling frequency?

(2 marks)

(c) If $x(t)$ is sampled at a frequency of 2 Hz, sketch and label the sampled signal.

(2 marks)

Q4. The signal $x(t) = \operatorname{sinc}^2(5t)$ is sampled at 15Hz to produce the signal $x_s(t)$.

(a) Derive the Fourier transform of the sampled signal $x_s(t)$.

(6 marks)

(b) Sketch the spectrum of the sampled signal $x_s(t)$.

(4 marks)

Q.8 Figure Q8(a) shows a vowel synthesizer which consists of a linear time-invariant (LTI) filter driven by an impulse train

$$e(t) = 2\sum_{n=-\infty}^{\infty} \delta(t-10n).$$

The impulse response, $h(t)$, of the LTI filter is plotted in Figure Q8(b) where $h(t)=0$ for $t<0$, and

$$H(f) = \Im\{h(t)\} = \frac{40}{(13-20f^2)+j4f}$$

is the Fourier transform of $h(t)$.

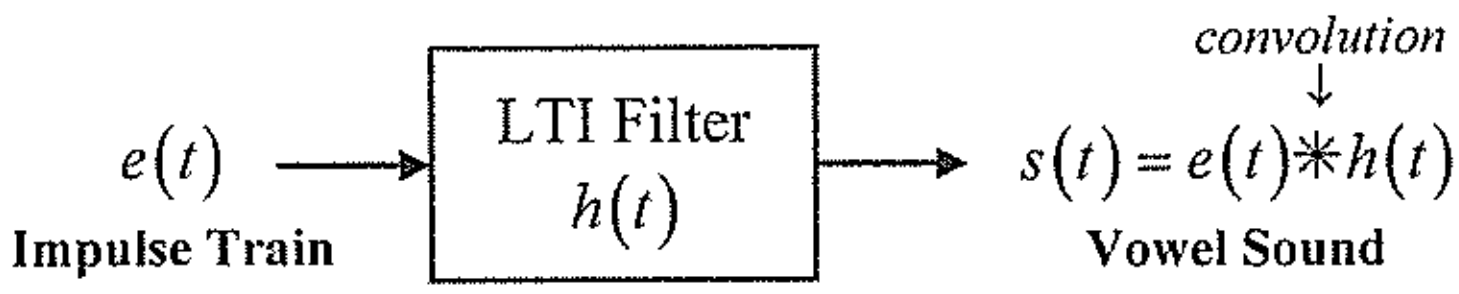

Figure Q8(a)

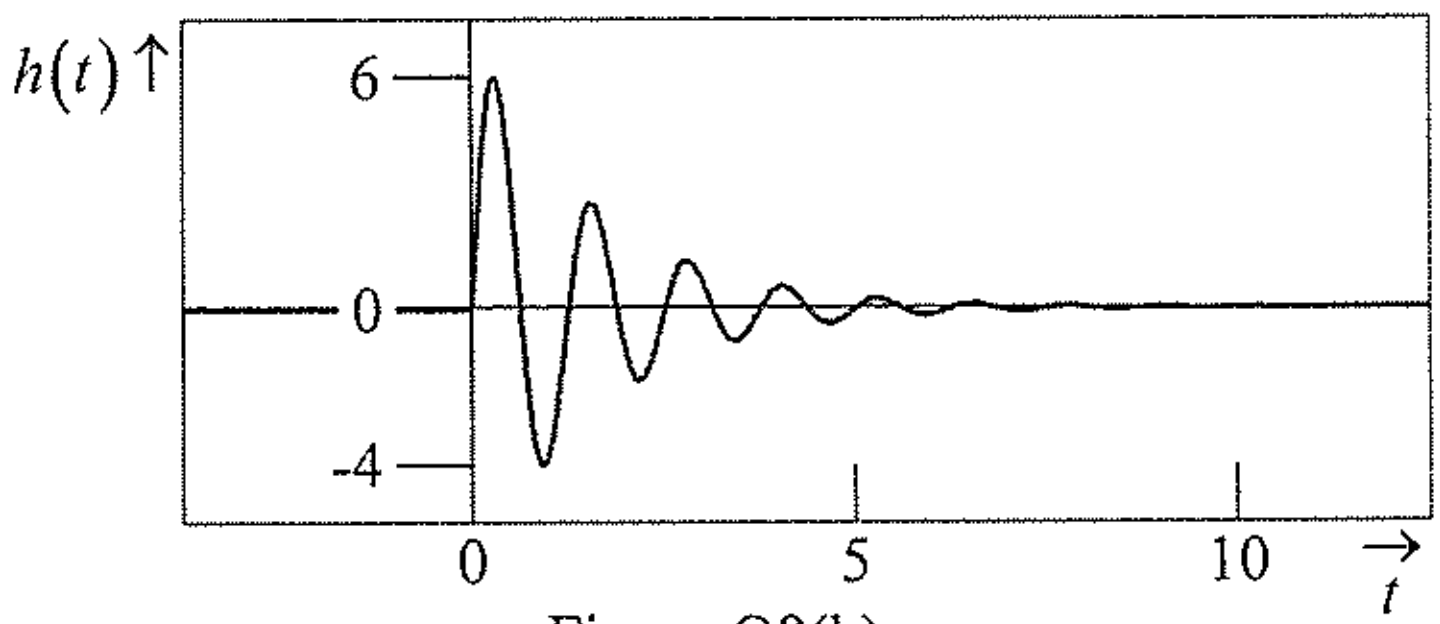

Figure Q8(b)

(a) Draw an adequately labeled sketch of $s(t)$.

(5 marks)

(b) Derive the spectrum, $S(f)$, of $s(t)$.

(6 marks)

(c) i. Find the complex exponential Fourier series coefficients, c_k, of $s(t)$.

(5 marks)

ii Based on the value of c_0 alone, can we claim with absolute certainty that the average power of $s(t)$ is greater than the average value of $s(t)$? Explain your answer.

(4 marks)

END OF QUESTIONS

Q6. Figure Q6 shows a lower-single-sideband (LSSB) modulator where $x(t)$ is the input message signal and $y(t)$ is the output modulated signal. In Figure Q6, $X(f)$ and $Y(f)$ are the Fourier transforms of $x(t)$ and $y(t)$, respectively, and $h(t)$ is the impulse response of the ideal lowpass filter.

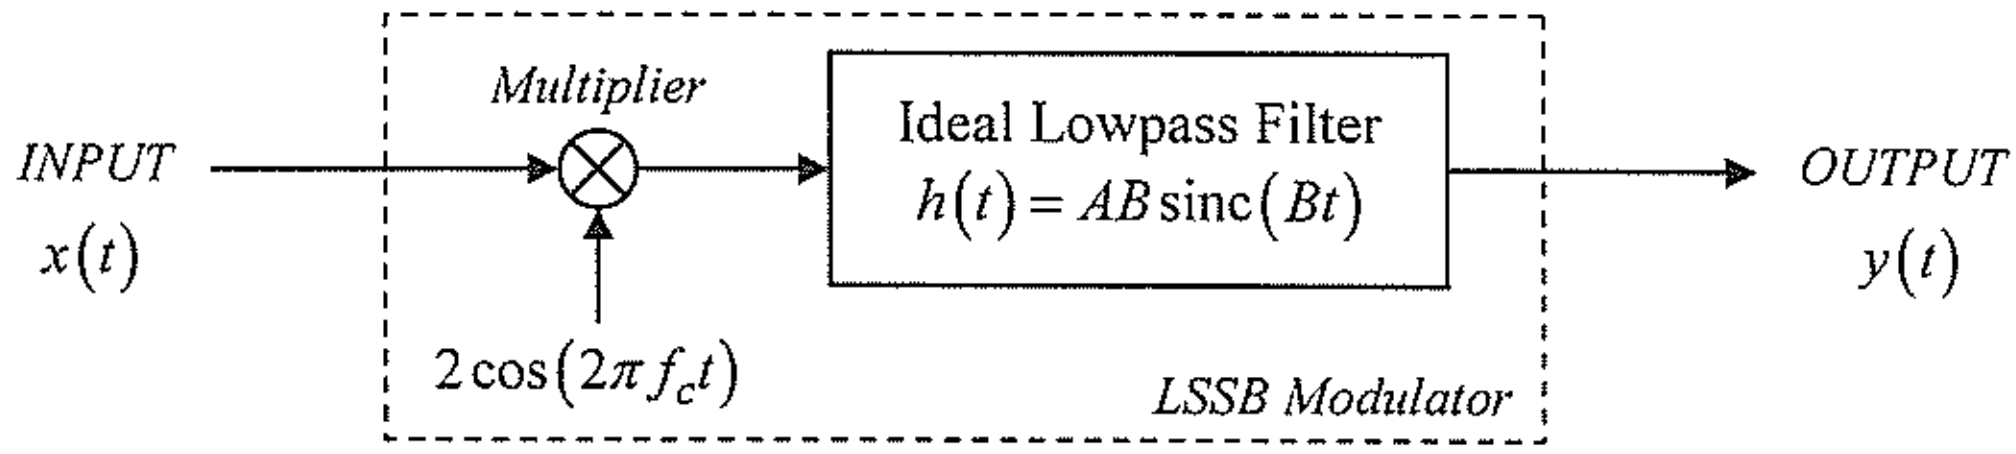

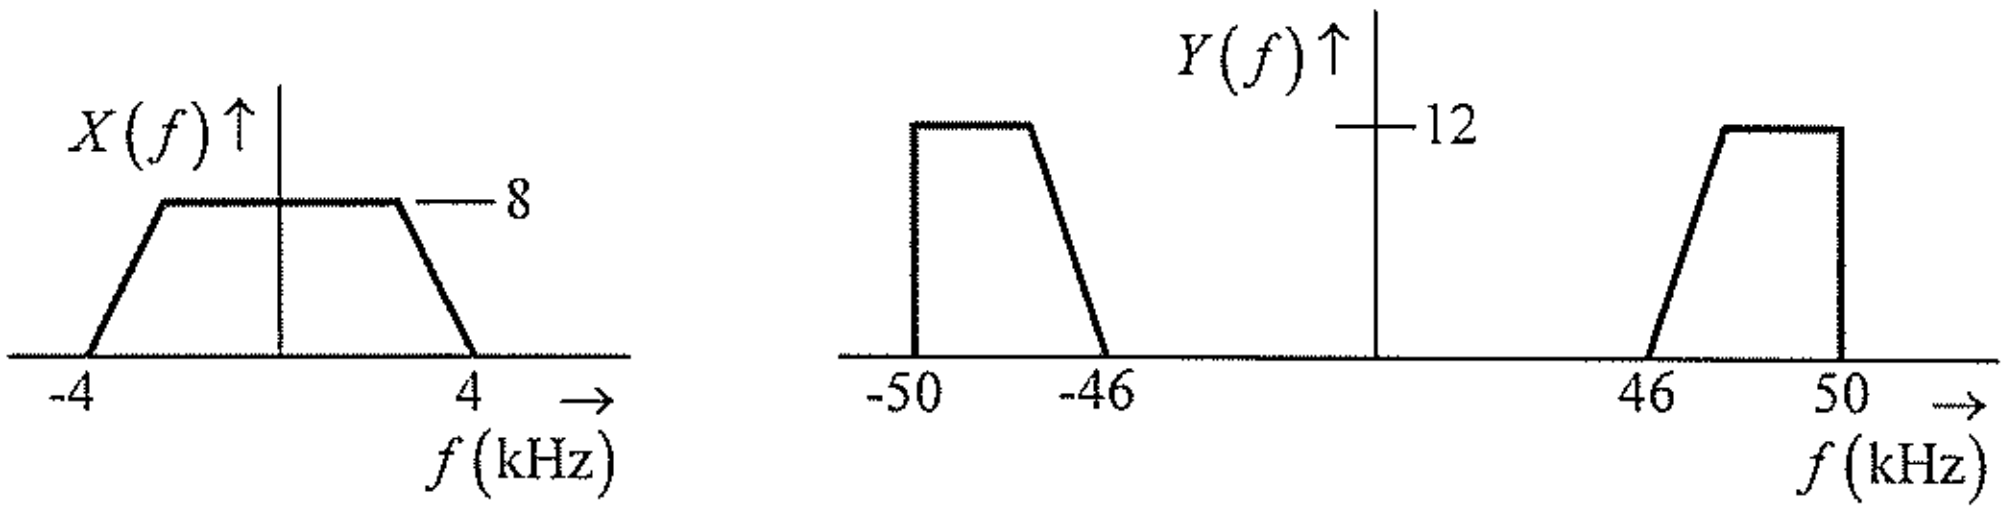

Figure Q6

(a) Find the values of f_c, A and B. (12 marks)

(b) Suppose we apply $y(t)$ to the input of another LSSB modulator to produce $z(t)$ at its output. Find the relationship between $z(t)$ and $x(t)$ if the LSSB modulator is identical to the one used in Part (a).

(8 marks)

END OF QUESTIONS