EE2023E Signals & Systems Quiz
Semester 2 AY2014/15

Date : 16 March 2015 **Time Allowed : 1.5 hours**

Instructions :

1. Answer all 4 questions. Each question carries 10 marks.
2. This is a closed book quiz.
3. Tables of Fourier transforms and trigonometric identities are given on Pages 11 and 12.
4. No programmable or graphic calculator is allowed.
5. Write your answers in the spaces indicated in this question paper. Attachment is not allowed.
6. Write your name, matric number and lecture group in the spaces indicated below.

Name : ________________________________

Matric # : ______________________________

Question #	Marks
1	
2	
3	
4	
Total Marks	

Q.1 The discrete-frequency spectrum of two signals $x(t)$ and $y(t)$ are shown in figure below. Following questions are based this figure.

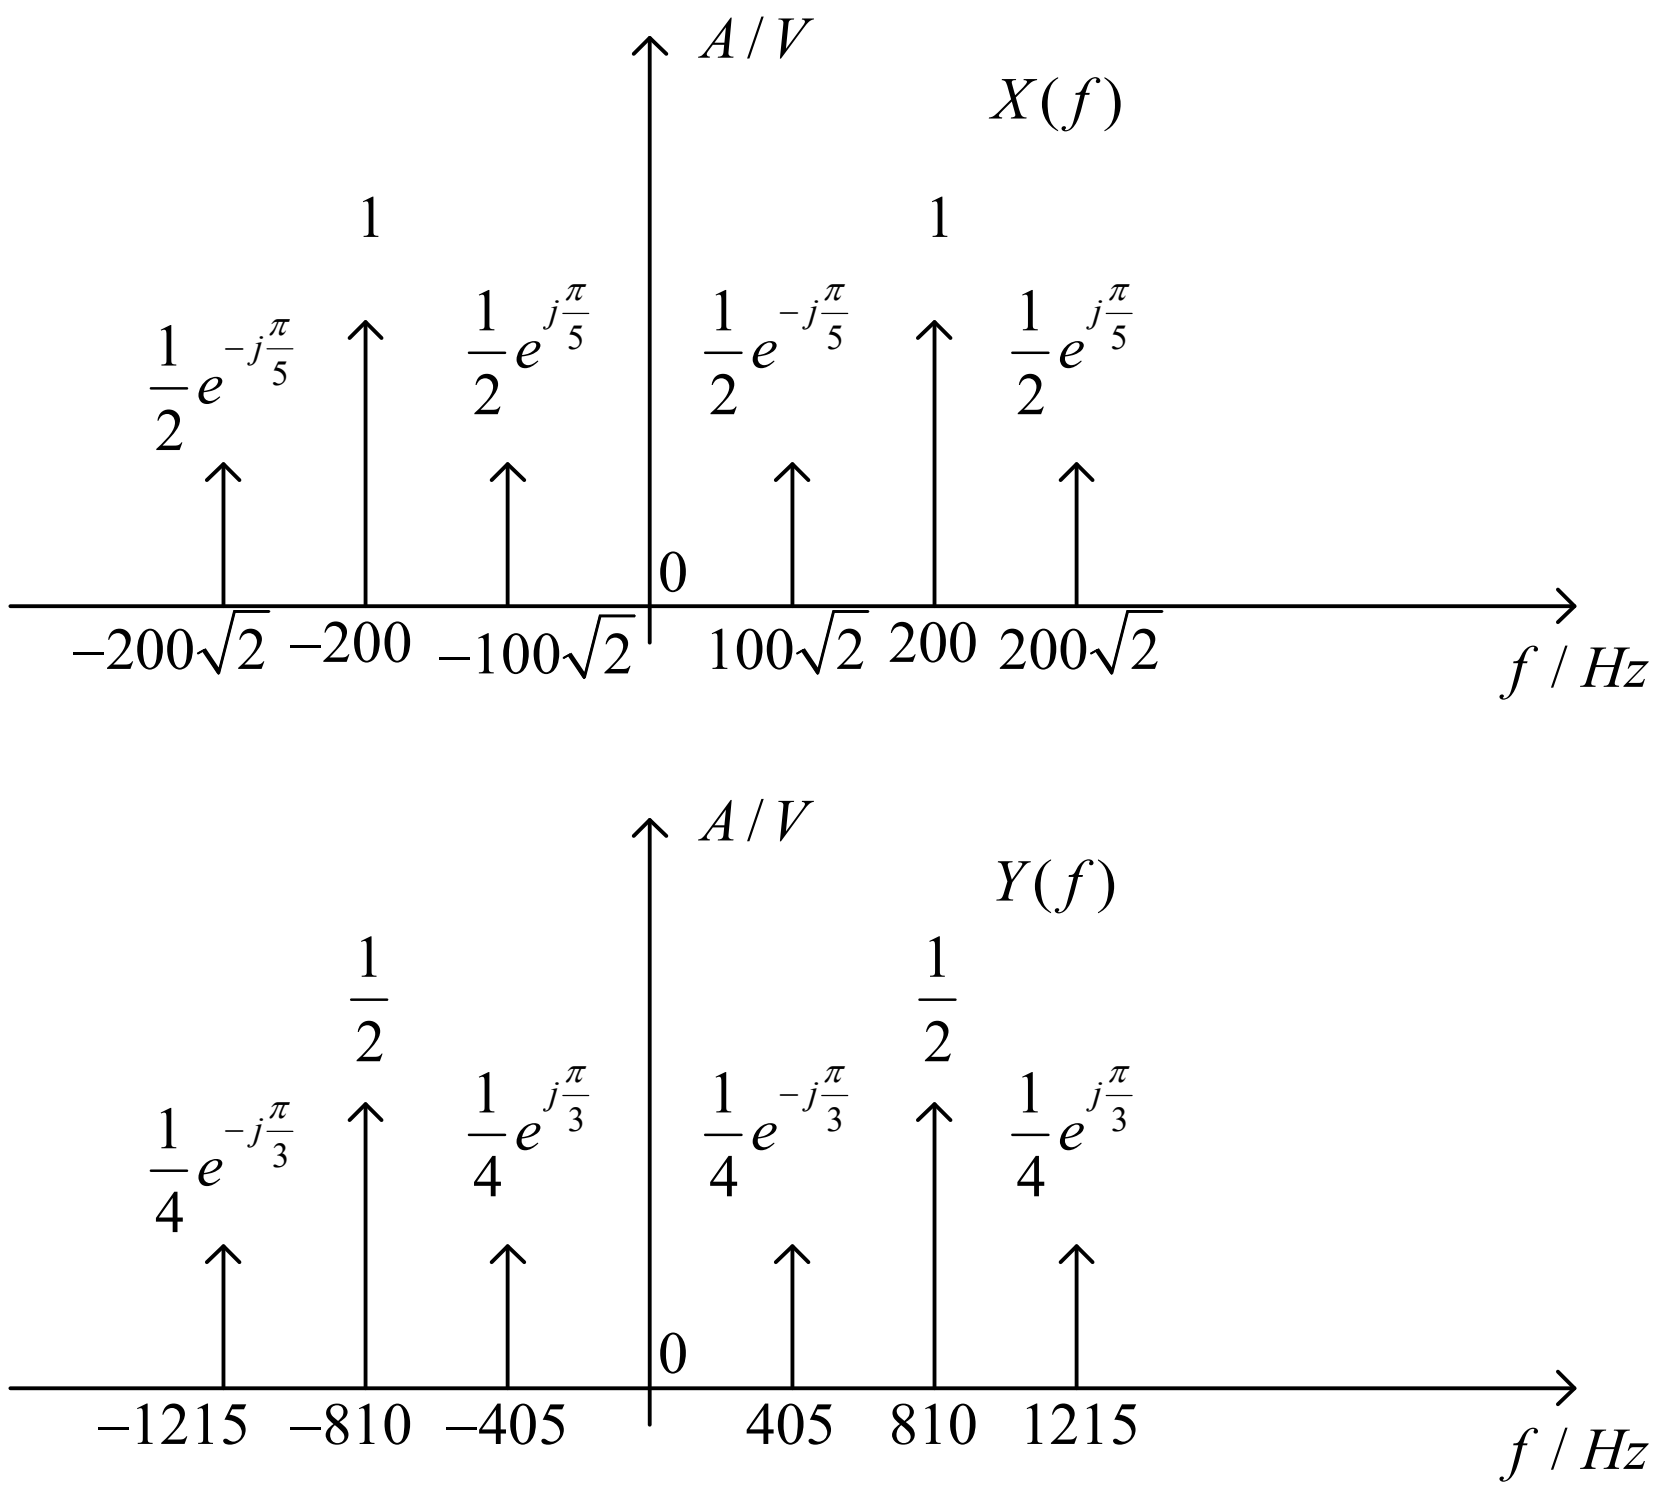

Figure Q.1

(a) Determined the powers of $x(t)$ and $y(t)$.

(b) Indicate the fundamental frequency(ies) for the periodic signal(s) in $x(t)$ and $y(t)$.

(c) Indicate the Fourier series for the periodic signal(s) in $x(t)$ and $y(t)$.

(d) Show how you can generate $y(t)$ if only two signals $y_1(t) = \cos(810\pi t + \frac{\pi}{3})$, $y_2(t) = \cos(1620\pi t)$, an analog multiplier and an analog adder are available.

Q.1 ANSWER

Q.1 ANSWER ~ continued

Q.2. (a) Determine the Fourier transform of the signal $x(t)$ shown in Figure Q.2, where the hump in the middle of the pulse comprises a half cosine signal shape.

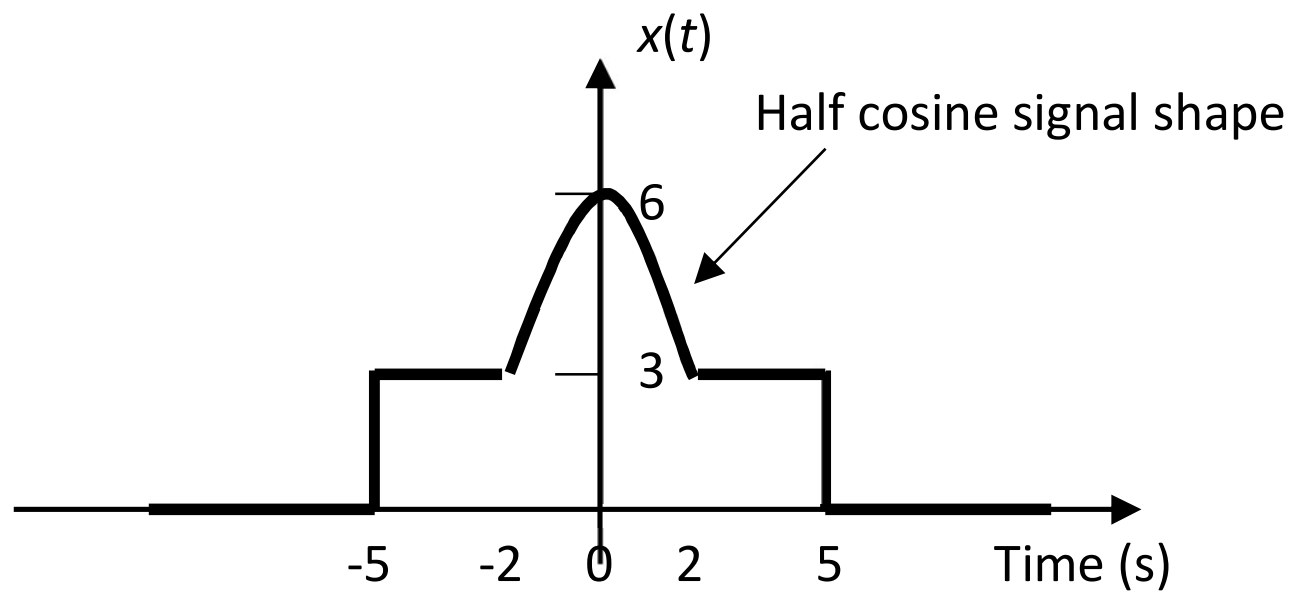

Figure Q.2

(b) Using the replication property of the Dirac-δ function, the periodic signal $x_p(t)$can be obtained as:

$$x_p(t) = x(t) \otimes \sum_{k=-\infty}^{\infty} \delta(t-15k)$$

where the period is 15 seconds, and $\otimes$ denotes convolution. Derive the Fourier transform, $X_p(f)$, of the periodic signal $x_p(t)$ based on this approach.

Q.2 ANSWER

Q.2 ANSWER ~ continued

Q.3 Figure Q.3(a) below shows the amplitude spectrum $Z(f)$ of signal $z(t)$. Figure Q.3(b) is the time domain waveform of the periodic signal $v(t)$.

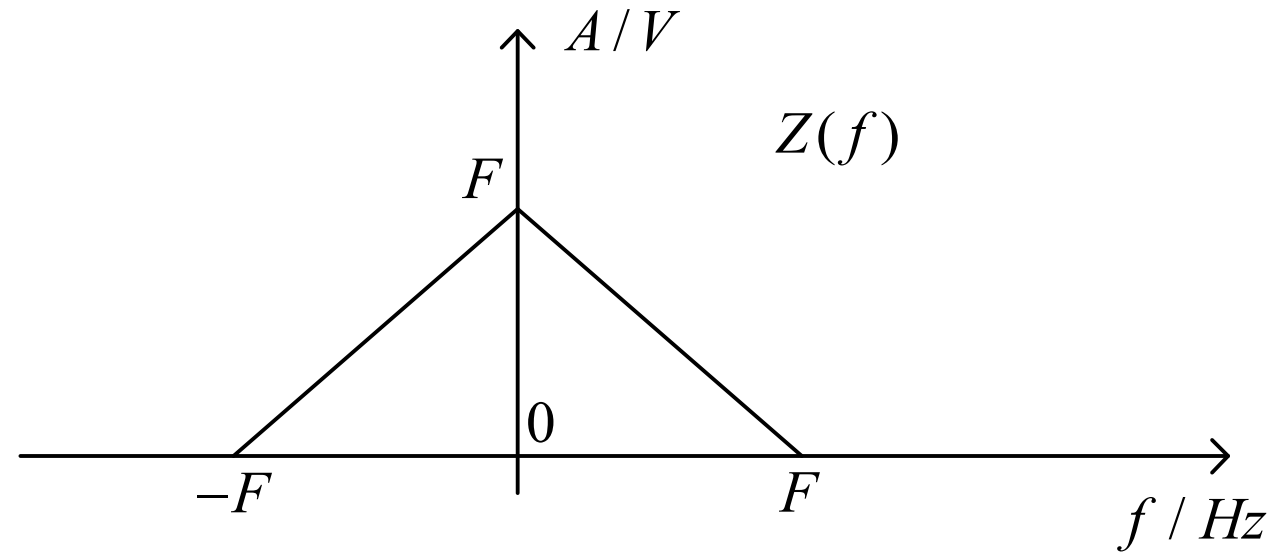

a

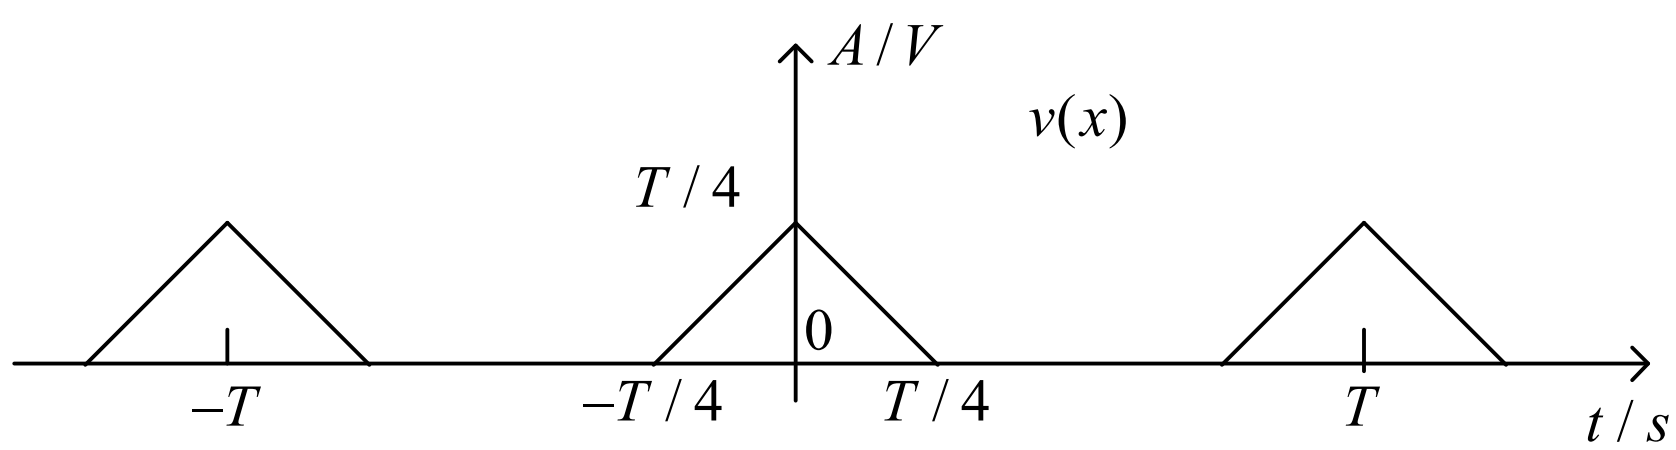

b

(a) What is the expression for $Z(f)$?

(b) Find the 3 dB bandwidth of $z(t)$ and the percentage of energy within its 3 dB bandwidth.

(c) What is the Fourier series expansion of $v(t)$?

Q.3 ANSWER

Q.3 ANSWER ~ continued

Q.4. The signal $x(t)$ shown in Fig.Q.4 is sampled at 2Hz to form a sampled signal $x_s(t)$.

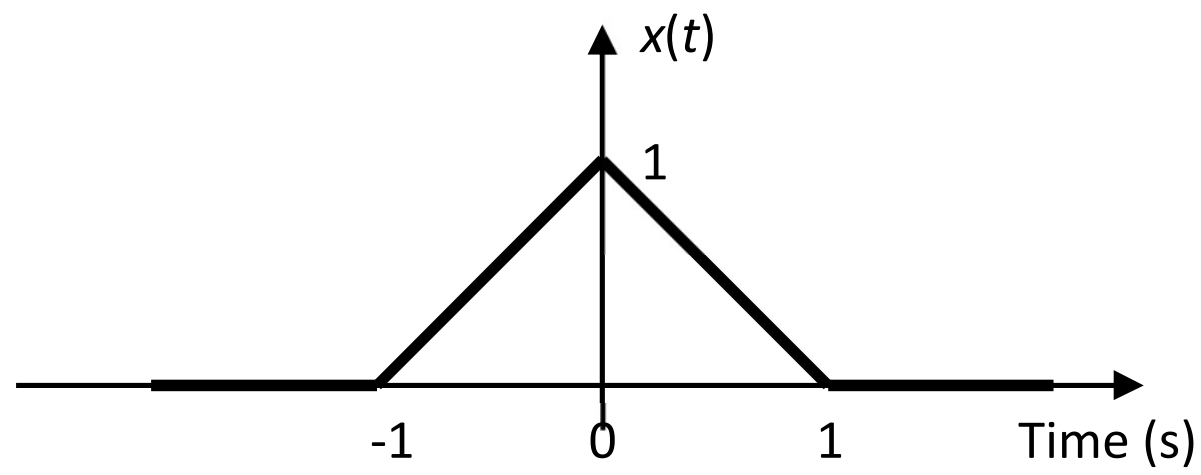

Figure Q.4

(a) Sketch and label the sampled signal $x_s(t)$.

(b) Determine the Fourier Transform, $X_s(f)$, of the sampled signal $x_s(t)$.

(c) Sketch the amplitude spectrum of $X_s(f)$.

Q.4 ANSWER

Q.4 ANSWER ~ continued

This page is intentionally left blank to facilitate detachment of the formula sheet for easy reference. Anything written on this page will not be graded.

Fourier Series: $$\begin{cases} X_k = \dfrac{1}{T}\displaystyle\int_{\tilde{t}}^{\tilde{t}+T} x(t)\exp(-j2\pi k\,t/T)\,dt \\ x(t) = \sum_{k=-\infty}^{\infty} X_k \exp(j2\pi k\,t/T) \end{cases}$$

Fourier Transform: $$\begin{cases} X(f) = \displaystyle\int_{-\infty}^{\infty} x(t)\exp(-j2\pi ft)\,dt \\ x(t) = \displaystyle\int_{-\infty}^{\infty} X(f)\exp(j2\pi ft)\,df \end{cases}$$

FOURIER TRANSFORMS OF BASIC FUNCTIONS

	$x(t)$	$X(f)$
Constant	K	$K\delta(f)$
Unit Impulse	$\delta(t)$	**1**
Unit Step	$u(t)$	$\frac{1}{2}\left[\delta(f)+\frac{1}{j\pi f}\right]$
Sign (or Signum)	$\mathrm{sgn}(t)$	$\frac{1}{j\pi f}$
Rectangle	$\mathrm{rect}\left(\frac{t}{T}\right)$	$T\,\mathrm{sinc}(fT)$
Triangle	$\mathrm{tri}\left(\frac{t}{T}\right)$	$T\,\mathrm{sinc}^2(fT)$
Sine Cardinal	$\mathrm{sinc}\left(\frac{t}{T}\right)$	$T\,\mathrm{rect}(fT)$
Complex Exponential	$\exp(j2\pi f_o t)$	$\delta(f-f_o)$
Cosine	$\cos(2\pi f_o t)$	$\frac{1}{2}\left[\delta(f-f_o)+\delta(f+f_o)\right]$
Sine	$\sin(2\pi f_o t)$	$-\frac{j}{2}\left[\delta(f-f_o)-\delta(f+f_o)\right]$
Gaussian	$\exp\left(-\frac{t^2}{\alpha^2}\right)$	$\alpha\pi^{0.5}\exp(-\alpha^2\pi^2 f^2)$
Comb	$\sum_{m=-\infty}^{\infty}\delta(t-mT)$	$\frac{1}{T}\sum_{k=-\infty}^{\infty}\delta\left(f-\frac{k}{T}\right)$

FOURIER TRANSFORM PROPERTIES

	Time-domain	**Frequency-domain**
Linearity	$\alpha x_1(t)+\beta x_2(t)$	$\alpha X_1(f)+\beta X_2(f)$
Time scaling	$x(\beta t)$	$\frac{1}{\lvert\beta\rvert}X\left(\frac{f}{\beta}\right)$
Duality	$X(t)$	$x(-f)$
Time shifting	$x(t-t_o)$	$X(f)\exp(-j2\pi f t_o)$
Frequency shifting (Modulation)	$x(t)\exp(j2\pi f_o t)$	$X(f-f_o)$
Differentiation in the time-domain	$\frac{d^n}{dt^n}x(t)$	$(j2\pi f)^n X(f)$
Multiplication in the time-domain	$x_1(t)x_2(t)$	$\int_{-\infty}^{\infty}X_1(\zeta)X_2(f-\zeta)\,d\zeta$ or $X_1(f)\ast X_2(f)$
Convolution in the time-domain	$\int_{-\infty}^{\infty}x_1(\zeta)x_2(t-\zeta)\,d\zeta$ or $x_1(t)\ast x_2(t)$	$X_1(f)X_2(f)$
Integration in the time-domain	$\int_{-\infty}^{t}x(\tau)\,d\tau$	$\frac{1}{j2\pi f}X(f)+\frac{1}{2}X(0)\delta(f)$
		$\frac{1}{j2\pi f}X(f)$ **if** $X(0)=0$

TRIGONOMETRIC IDENTITIES	
$\exp(\pm j\theta) = \cos(\theta) \pm j\sin(\theta)$	$\sin(\alpha \pm \beta) = \sin(\alpha)\cos(\beta) \pm \cos(\alpha)\sin(\beta)$
$\cos(\theta) = \frac{1}{2}\left[\exp(j\theta) + \exp(-j\theta)\right]$	$\cos(\alpha \pm \beta) = \cos(\alpha)\cos(\beta) \mp \sin(\alpha)\sin(\beta)$
$\sin(\theta) = \frac{1}{j2}\left[\exp(j\theta) - \exp(-j\theta)\right]$	$\tan(\alpha \pm \beta) = \frac{\tan(\alpha) \pm \tan(\beta)}{1 \mp \tan(\alpha)\tan(\beta)}$
$\sin^2(\theta) + \cos^2(\theta) = 1$	
$\sin(2\theta) = 2\sin(\theta)\cos(\theta)$	$\sin(\alpha)\sin(\beta) = \frac{1}{2}\left[\cos(\alpha - \beta) - \cos(\alpha + \beta)\right]$
$\cos(2\theta) = \cos^2(\theta) - \sin^2(\theta)$	$\cos(\alpha)\cos(\beta) = \frac{1}{2}\left[\cos(\alpha - \beta) + \cos(\alpha + \beta)\right]$
$\sin^2(\theta) = \frac{1}{2}\left[1 - \cos(2\theta)\right]$	$\sin(\alpha)\cos(\beta) = \frac{1}{2}\left[\sin(\alpha - \beta) + \sin(\alpha + \beta)\right]$
$\cos^2(\theta) = \frac{1}{2}\left[1 + \cos(2\theta)\right]$	$\mathbf{C}\cos(\theta) - \mathbf{S}\sin(\theta) = \sqrt{\mathbf{C}^2 + \mathbf{S}^2}\cos\left[\theta + \tan^{-1}\left(\frac{\mathbf{S}}{\mathbf{C}}\right)\right]$