

# Beam Charge Measurement for the g2p/GEp experiments

Pengjia Zhu

April 13, 2016

## Abstract

The g2p/GEp experiments used a solid  $\text{NH}_3$  polarized target, where the polarization of the target is sensitive to temperature and radiation. The beam current was limited to 5-100 nA during the experiment to avoid too much depolarization of target (The typical Hall A running condition for beam current is a few mA to 100 A). The measured charge was further used to get the accurate physics asymmetries. A new BCM (Beam Current Monitor) receiver and DAQ system were used to measure the beam current at such a low current range. A tungsten calorimeter was used to calibrate the BCMs. This technical note summarizes the calibration procedure and the performance of the BCMs.

## 1 Hardware

The BCM system used for the g2p/GEp experiments contains two RF cavities (1a and 1c in Fig. 1), a BCM receiver with related data-acquisition (DAQ) system, and a tungsten calorimeter for calibration. The Unser monitor (1b in Fig. 1) was not used because it has an accuracy of  $0.5 \mu\text{A}$  so it is not usable at low current. Farady cup has about same accuracy and loss in the machine needs to be taken into account. The location of them is shown in Fig. 1.

### 1.1 BCM receiver

Since the original RMS-to-DC converter [1] did not work at low current, a new BCM receiver was designed by John Musson and his colleagues from the JLab instrumentation group for the purpose of achieving a reasonable signal/noise (S/N) ratio in the beam current range of several nanoampere to several micro-ampere [2]. The design diagram is shown in Fig. 2.

The receiver consists of an analog part and a digital part. The analog part includes the amplifier and the mixer. The multiply mixer converts the radio frequency (RF) signal to the intermediate frequency (IF) signal. The signal is digitized by a 36 MSPS ADC, and applied by a cascaded-integrator-comb (CIC) filter and an infinite-impulse-response (IIR) filter (10.4 kHz). The CORDIC system is used to get the amplitude and phase of the digital signal [2]. The 20-bit digital signal is converted back to 0-10V analog signal to match the existing Hall A DAQ system using a 18-bit DAC. A DIV unit is used to intercept the signal from 20-bit to 18-bit by applying an adjustable bit shift. More details can be found in [2].

### 1.2 Data acquisition system

The BCM data from the receiver was connected to the DAQ system as shown in Fig. 3. The voltage signal from receiver was split and sent to the Voltage to Frequency (V2F) module and the HAPPEX ADC.

#### 1.2.1 Helicity

The beam is polarized in injector before going to the CEBAF accelerator. The polarization is controlled by a helicity control board (NIM) [3]. The helicity control board generates several signals which relative to each other. It controls the high voltage supply to change the orientation of the polarization of laser, which is used to generate the polarized electron beam with GaAs photogun by using the method of optical pumping. Meanwhile the helicity control board sends waves to the DAQ system in the Hall in order to get the helicity

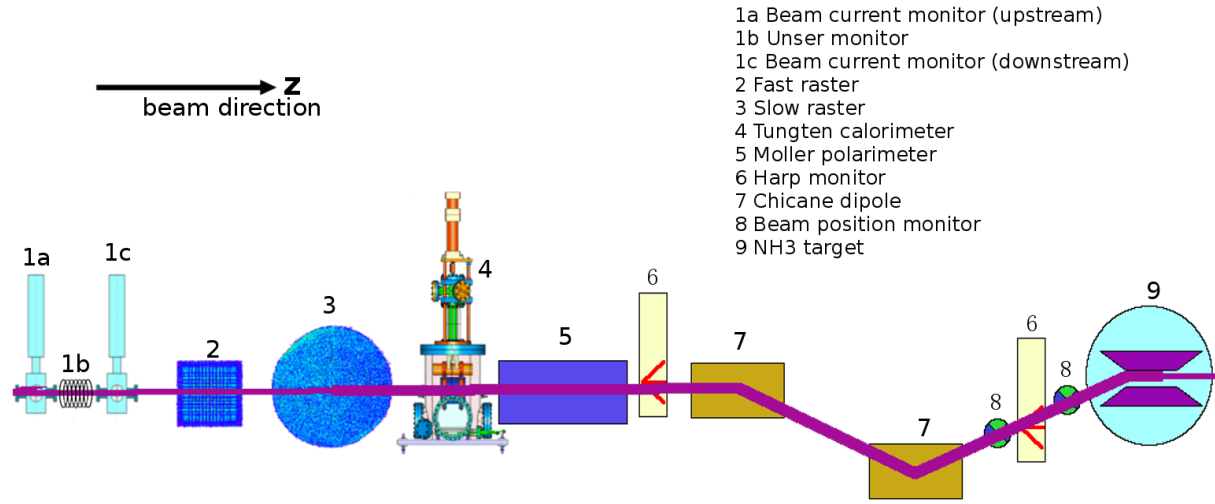


Figure 1: Beamline for the g2p/GEp experiments

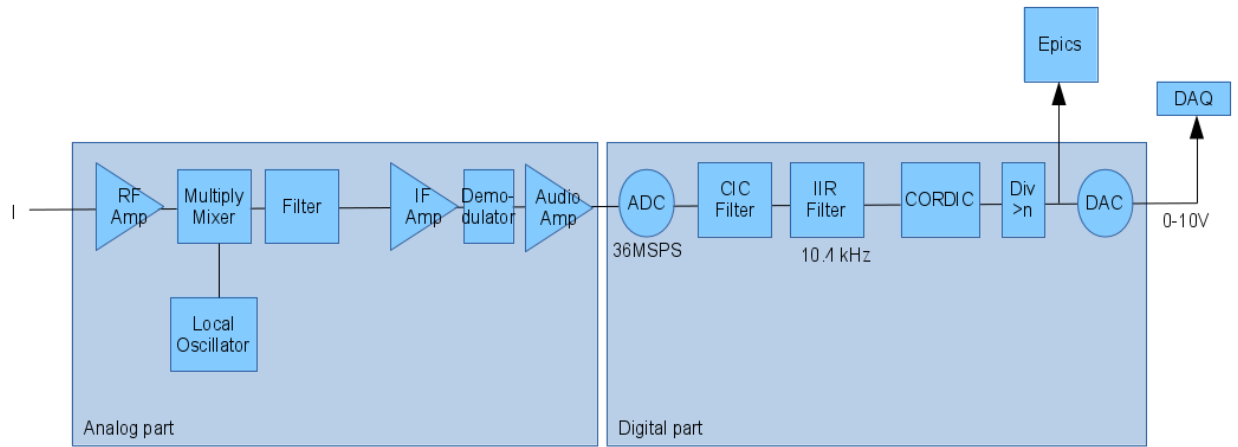


Figure 2: BCM receiver used for the g2p/GEp experiments

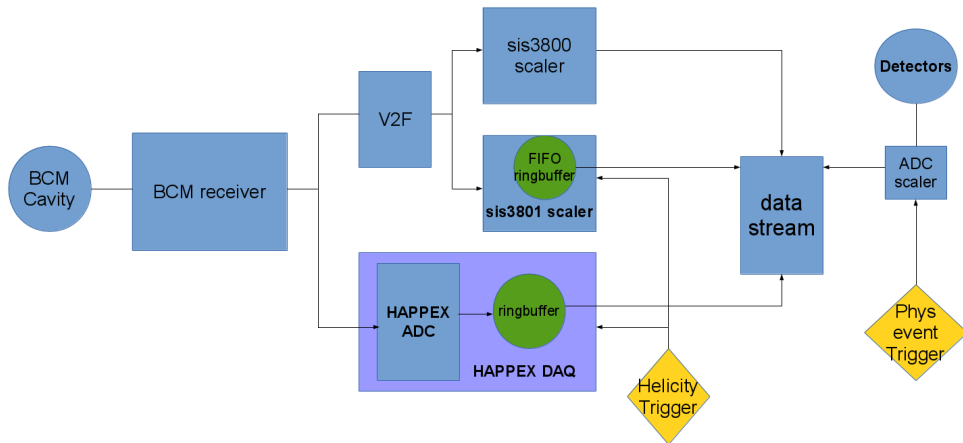


Figure 3: DAQ system for BCM

Mode	Free clock
T-Settle	70 $\mu s$
T-Stable	971.65 $\mu s$
Helicity Pattern	+ - - + or - + + -
Reporting delay	8 window
Helicity board frequency	960.015 Hz

Table 1: Helicity configuration

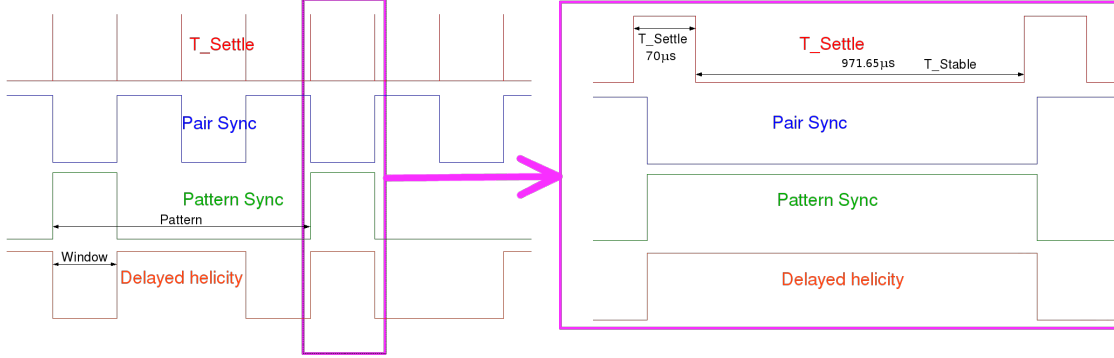


Figure 4: Helicity signal from helicity control board.

based information. During the experiment the helicity setting was the same as QWEAK experiment in Hall C, as shown in table 1.

Four waves were sent to Hall during the experiment by fiber, which named T-Settle (or MPS), pattern\_sync (or QRT), pair\_sync, and delayed helicity (Fig. 4). The quartet helicity pattern is used for the experiment to minimize the system error, which is “+ - - +” or “- + + -”, one pattern is composed with four helicity windows. The pattern\_sync indicates the first window of one pattern. The T-Settle signal is used for judging if helicity is reliable. The high-level T-Settle (70  $\mu s$ ) indicates the helicity flips, or has unsure helicity states, while the low-level T-Stable (971.65  $\mu s$ ) indicates the reliable helicity states. The pair sync signal flips in each helicity window, which is used as the redundancy information. The helicity flip signal sent to Hall is 8 windows delayed with the real helicity flip signal, and need to be further dealt for use. More details about the helicity decoder can be found in [4].

### 1.2.2 Scaler

The V2F converts the DC voltage from the BCM receiver to the frequency signal in order to readout the scalers for counting. The SIS380x scaler has two modes selected by a jumper on the board: SIS3800 and SIS3801.

**SIS3800 scaler** The SIS3800 scaler counts the charge, clock and trigger signals for each event, and delivers them to the data stream when the event trigger is accepted. The counter data for the SIS3800 is only cleared at the beginning of the run, thus the SIS3800 is used to get the counts for the whole run.

**SIS3801 scaler** The SIS3801 is used to get the helicity gated information. Fig. 5 shows the workflow of the SIS3801 scaler. The scaler is controlled by the T-Settle signal. The data registers count the charge, clock and trigger signals only in the T-Stable part of the helicity window. The counts are reset by the high-level T-Settle. A delayed T-Settle, the Pattern Sync, and the delayed helicity are also sent to the control register. Those information are saved in the FIFO (First-In-First-Out) register triggered by the delayed T-Settle signal. The FIFO is used as a ringbuffer (Fig. 6) before merging to the standard DAQ system.

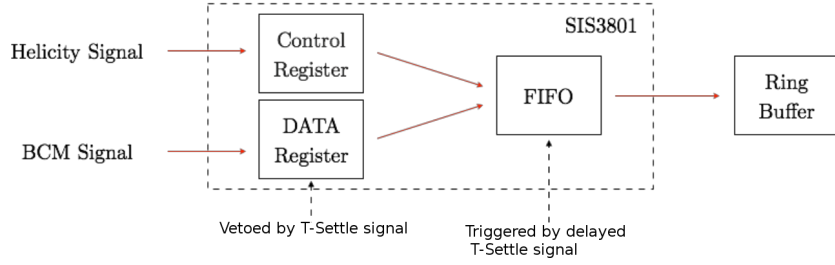


Figure 5: Workflow of the SIS3801 scaler [4]

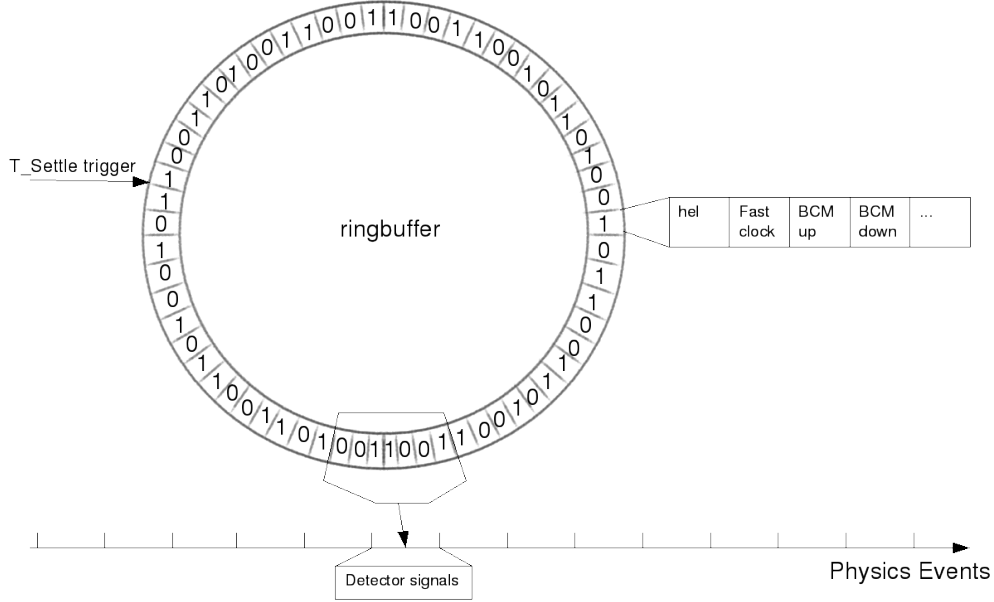


Figure 6: Workflow of the ringbuffer. The ringbuffer is used as the buffer merging from the data-stream of the helicity triggered DAQ to the physics triggered DAQ. For the SIS3801 scaler, the FIFO register is used as the ringbuffer. For the HAPPEX DAQ, an array defined in the CPU register is used as the ringbuffer.

### 1.2.3 HAPPEX DAQ

The HAPPEX DAQ were designed for the parity violation experiments. This DAQ was reprogrammed and reassembled for the g2p/GEp experiments.

The HAPPEX DAQ contains a timing board (NIM) [5], several 18-bit ADCs [6], a flexible IO (FLEXIO, NIM) [7], a trigger interface module (TI), and a VxWorks CPU. The diagram of HAPPEX DAQ is shown in Fig. 7.

**Timing board** The timing board generates several time signals to control the start and stop integration time of the ADCs. The T-Settle signal is used as the trigger source for the timing board. Based on the trigger signal, the timing board generates a set of signals (Fig. 8). The reset signal controls the ADC integration. The delay time between the baseline signal and the peak signal is used as the integration time, and the digital value difference between them is used as integrated result. The DAC module in the timing board was used as a debugging source during the experiment.

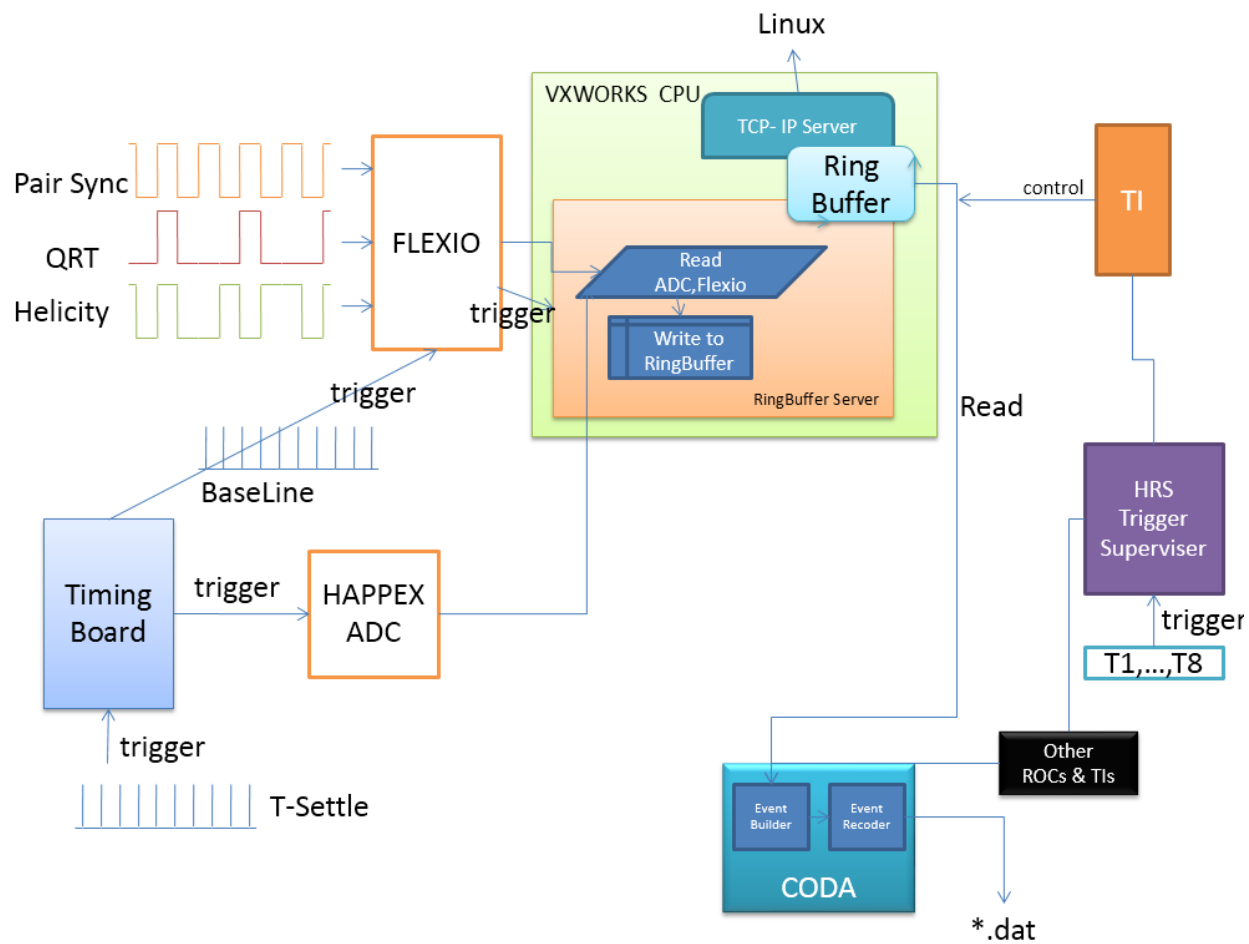


Figure 7: HAPPEX DAQ diagram

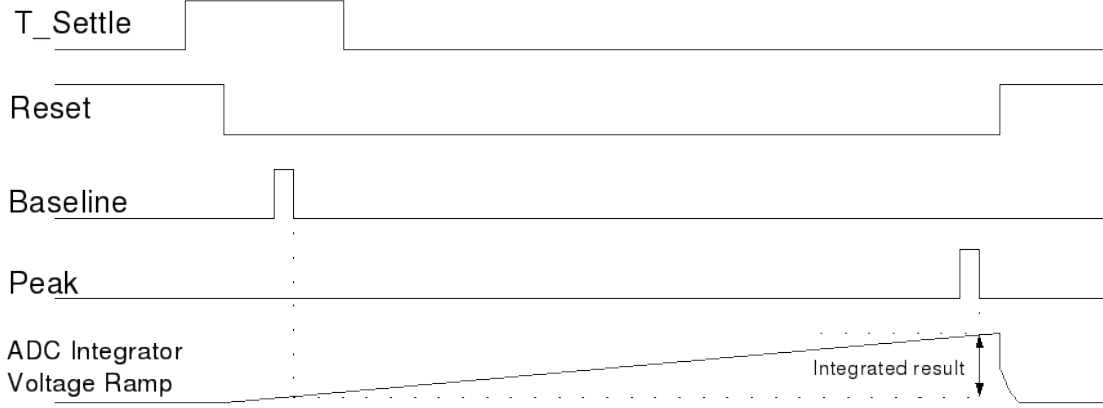


Figure 8: Signals from timing board [7]

**HAPPEX ADC** The HAPPEX ADC is designed for high bit resolution (18-bit) and a small non-linearity ( $\leq 2 \times 10^{-5}$ ) for measuring small parity violating asymmetries to high precision. From the asymmetry measurement test (Fig. 9), the bit resolution for the HAPPEX ADCs were much better than the one for the scalers. The integration time of the HAPPEX ADCs controlled by the timing board is  $875 \mu s$ , a little bit smaller than the helicity period ( $1041.65 \mu s$ ). The HAPPEX ADCs record more precise position and current information than the FASTBUS 1881 ADCs (with an integration time less than  $50 ns$  during the experiment).

**Flexible IO** The flexible IO is used to record the digital information. The baseline signal peak from the timing board triggers the flexible IO to record the helicity signals. It also provides a trigger signal for the ringbuffer.

**Ring Buffer** A VxWorks CPU controls the data reading from the HAPPEX ADCs and the flexible IO to the ringbuffer server in the CPU. The ringbuffer is an array saved in the register of the CPU. Each element in array includes the information of helicity, charge, clock signals for this helicity states (Fig. 6). For more reliable performance and less CPU occupation, a trigger is used instead of checking the pair sync polarity all of the time. The trigger from the flexible IO has the same period as the T-Settle. Each trigger causes the CPU to read out the data from the flexible IO and the ADCs once. A trigger interface controlled by the HRS trigger supervisor reads the data from the ringbuffer server to the data-stream. For the online debugging, a TCP-IP server was running on the CPU to readout the data from the ringbuffer from any Linux computer at any time.

### 1.3 Tungsten Calorimeter

A tungsten calorimeter [8] is located downstream of the BCMs and the two rasters [9] for calibrating the BCMs by measuring the beam induced temperature rise, as shown in Fig. 10. The chamber that holds the tungsten is pumped down to vacuum to minimize heat loss. The tungsten is in three positions for the different purpose:

1. Beam charging, the tungsten is in beam position. All of the incoming beam electrons hit the tungsten. The temperature is increasing during this period.
2. Equilibrating, the tungsten moves out of the beam pipe but doesn't touch the cooling plate. The beam turns off. The temperature stabilizes. The measurement of the temperature occurs in this period.
3. Cooling, the tungsten moves to the cooling plate to cool down the tungsten.

For the temperature measurement, six resistance temperature detectors (RTDs) are mounted on the outer surface at each end of the tungsten slug.

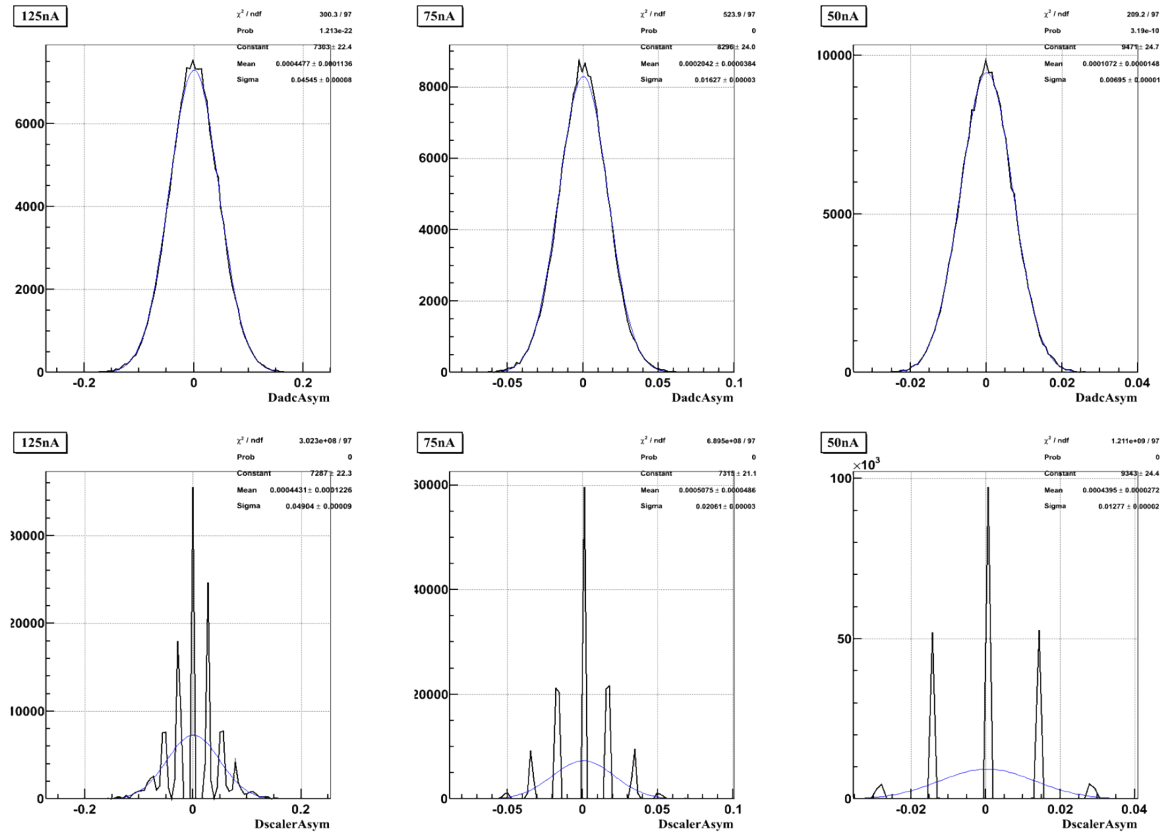


Figure 9: Comparison of charge asymmetry measurements from HAPPEX ADCs and scalers. The top three pictures use HAPPEX ADCs, while the bottom three pictures use scalers. The beam currents from left to right are 125 nA, 75 nA, and 50 nA. The total number of events are same in each histogram.

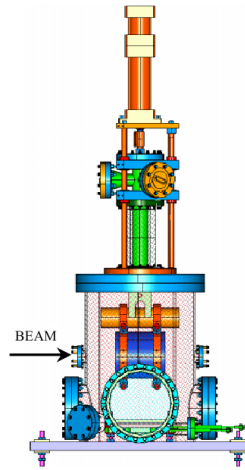


Figure 10: Tungsten Calorimeter

## 2 Calibration of the BCMs

Calibration data were taken several times during the experiment. In order to achieve the uniform heat load from the beam over the tungsten surface, the rasters were turned on during the BCM calibration. The limited size of the ringbuffer caused potential loss of data when the read-out speed was lower than the read-in speed. For the deadtime consideration, the DAQ system only read out no more than 50 sets data from the ringbuffer. An additional clock trigger with a frequency larger than 20 Hz ( $\geq 960$  (helicity frequency) / 50) was added to avoid data loss in the ringbuffer recorded in the data-stream. The clock signal was needed for calculating the pedestal of the scaler and the ADC. For the HAPPEX ADC, the helicity entries was used as the clock.

The pedestal is defined as the accumulated counts or ADC values per time when there is no beam. The value of it depends on the frequency of the clock source. There are two types of clock: fast clock and slow clock. The frequency of the fast clock was  $\sim 103.7$  KHz, while the frequency of the slow clock was  $\sim 1$  KHz. The calibration was taken for either of them.

A complete calibration period is shown in Fig. 11. The total temperature rise was used to calculate the total charge. The zero-order polynomial fits were taken before the beam charging and after the temperature become stable when the tungsten is in the equilibrating position. The relationship between the total charge and the temperature rise is:

$$Charge = K * Temperature, \quad (1)$$

where  $K$  is the heat capacity of tungsten. It was measured by Ahamad Mahmoud before the experiment [10]. The result is shown in Fig. 12, with the value of  $8555.5 \pm 50 J/K$ .  $T$  is the average temperature from the 6 RTDs.

There are several devices needed to be calibrated, and each one has its own special condition. The detail calibration procedures for each device are as follows.

### 2.1 Calibration for SIS3800 scaler

A reset signal was sent to the SIS3800 scaler at the beginning of the run to clear the counts. Since the scaler was found to cause high deadtime, only clock signals were sampled for each event, while other signals were sampled for each 1000 events. Also the DAQ read the scaler once at the end of the run.

The middle left picture in Fig. 11 is for the SIS3800 calibration. The rise in the graph is the period when the beam hits the tungsten, corresponding to the rise in the top left. The total charge has the following relation with the counts:

$$Charge = slope * (\Delta counts - ped * \Delta clockcounts), \quad (2)$$

where  $\Delta counts$  is the total BCM counts accumulated in the scaler,  $\Delta clockcounts$  is the total clock counts accumulated in the scaler. The  $ped$  is the pedestal value, which is calculated from the first-order polynomial fits before and after the beam. To get the  $slope$  value, two time points are chosen before and after the beam heats the tungsten. Using the  $\Delta counts$  and the  $\Delta clockcounts$  between these two time points and combining with the charge calculated from the temperature, the  $slope$  value is then determined.

The beam current is calculated from the calibration constants as:

$$Current = slope * (rate - ped * clockrate), \quad (3)$$

where  $rate$  and  $clockrate$  are defined as the BCM counts per second and clock counts per second.

### 2.2 Calibration for SIS3801 scaler

To calibrate the SIS3801 scaler it is necessary to accumulate all of the counts for each helicity window without any loss of data. There are two methods to get the total counts. One is using the sum counts from two virtual scalers. The offline analyzer [11] automatically accumulates the total counts for positive helicity states and negative helicity states, which present two independent variables (positive and negative virtual scaler) in the raw data. Another is accumulating all of the counts from the ringbuffer. The helicity decoder



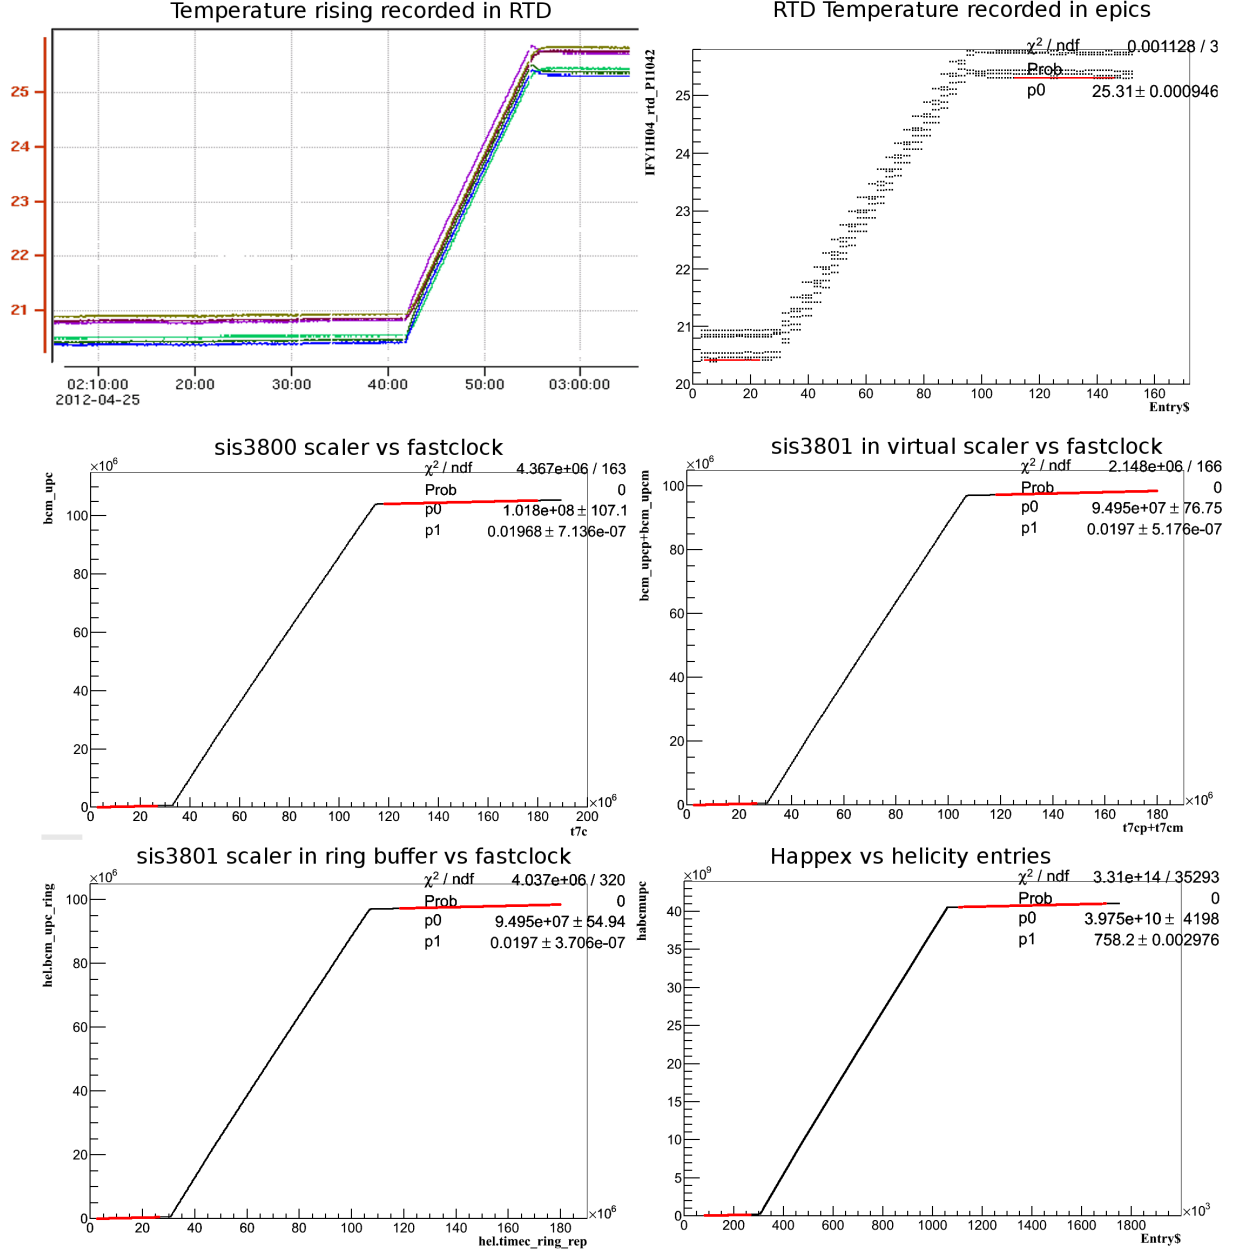


Figure 11: BCM Calibration, the top left and right figures are the temperature rise of the RTDs, the last four plots show the counts recorded in the scalers and the HAPPEX ADCs at the same time.

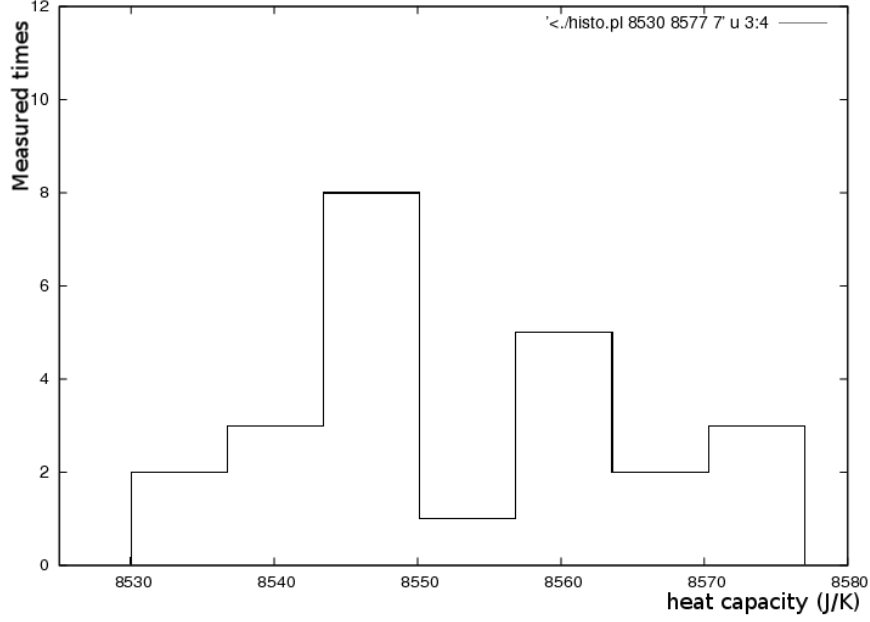


Figure 12: Tungsten Calorimeter Heat Capacity Determination [10]

was used to check if data were lost. The calculated calibration constants are the same from the two methods. Further procedures are same as the SIS3800. The total charge has the following relation with the counts:

$$Charge = slope * (\Delta counts - ped * \Delta clockcounts), \quad (4)$$

where the  $\Delta counts$  and  $\Delta clockcounts$  are counted from the SIS3801 scaler. Since the SIS3801 does not count for 70  $\mu s$  for each 1041.65  $\mu s$ , the slopes calculated for the SIS3801 are larger than the slope for the SIS3800. The beam current is calculated as:

$$Current = Slope * (rate - ped * 103700/s * 971.65\mu s) / 1041.65\mu s, \quad (5)$$

where 103700/s is the frequency of the fast clock, 971.65  $\mu s$  is the duration of T-Stable, and 1041.65  $\mu s$  is the duration of a helicity window.

### 2.3 Calibration for HAPPEX ADC

To calibrate the HAPPEX ADC, the values are accumulated for all of the events between two time periods as the total counts. The entries in the HAPPEX DAQ are used as the time stamp. The total charge has the following relation with the counts:


$$Charge = slope * 875\mu s * (\Delta counts - ped * \Delta entries), \quad (6)$$

where 875  $\mu s$  is the integration time of the ADC. The beam current is calculated as:

$$Current = slope * (rate - ped) * 875\mu s / 1041.65\mu s. \quad (7)$$

### 2.4 Uncertainty

The uncertainty of the calculated charge from the tungsten calorimeter comes from the beam energy, RTD, measured tungsten heat capacity, and the heat loss. The accuracy of the beam energy calculated from the ARC measurement [12] is 0.2 MeV in the range of 0.5 to 6 GeV [13], which contributes to the uncertainty of calculated charge of 0.34 nC per 1 K temperature rise (2.2 GeV beam energy). The uncertainties of the RTDs are 12.5 mK [14], which contributes uncertainty of 0.046  $\mu C$  (2.2 GeV beam energy). The 50 J/K

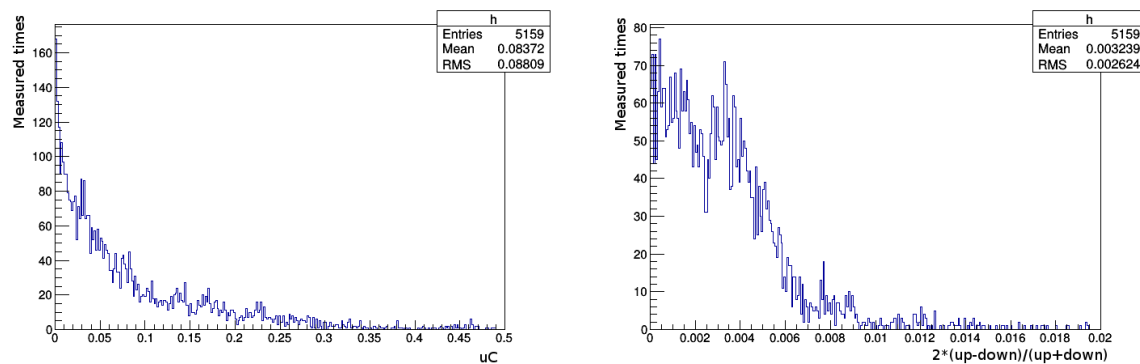

(a) Absolute difference between upstream and downstream charge (b) Relative difference between upstream and downstream charge

Figure 13: Comparison of the charge calculated from the upstream and downstream BCMs. Each entry in the graph is the total charge calculated from each run from the experiment.

uncertainty of heat capacity contributes  $0.18 \mu C$  per 1 K temperature rise (2.2 GeV beam energy). The Hall A calorimeter thermal and mechanical design limits heat losses to the  $\sim 0.2 \%$  level if the measurement within 20 min[8], which causes the uncertainty of calculated charge additional 0.2 %. The total uncertainty is  $\sim 0.68 \%$  for the calculated charge from tungsten.

By comparing the difference between the upstream and downstream BCMs, the fluctuations between the two are below  $0.19 \mu C$  for 90 % runs. The relative differences between them for 90 % of runs are below 0.7 %, as shown in Fig. 13 . The differences indicate the uncertainty of the BCM is below 0.7 %. Combined with the uncertainty of the tungsten calorimeter, the final uncertainty of BCMs is below 1 %.

Fig. 14 shows the stability of the calibration with time during 3/13/2012 - 5/18/2012. The fluctuation of the calibration constants was below 1% in one month.

### 3 Calibration constants

The calibration constants are shown in the Appendix Tables 1-9. Some specials are listed below:

- Begin - Mar.17 3rm downstream scaler abnormal
- Mar.18 - Apr.2 Left arm upstream scaler noisy
- Apr.2 - Apr.9 Right arm SIS3801 not working
- Apr.9 Changed right arm scaler channel for bcm
- Apr.19 - Calibration constant changed
- Near May.12 Third arm SIS3801 not working
- May.13 - May.14 Downstream bcm broken

The bcm receiver gain settings for each periods are list below, the values after the date are:

A\_Pre\_Gain\_1/A\_Pre\_Gain\_2/A\_Mag\_Div  
 B\_Pre\_Gain\_1/B\_Pre\_Gain\_2/B\_Mag\_Div  
 IQ\_Filter\_K  
 Mag\_Filter\_K

- Begin - Mar.2 18:39:42 Gain changing
- Mar.2 18:39:43 - Mar.5 10:00:12 10/10/1 9/9/1 3 4

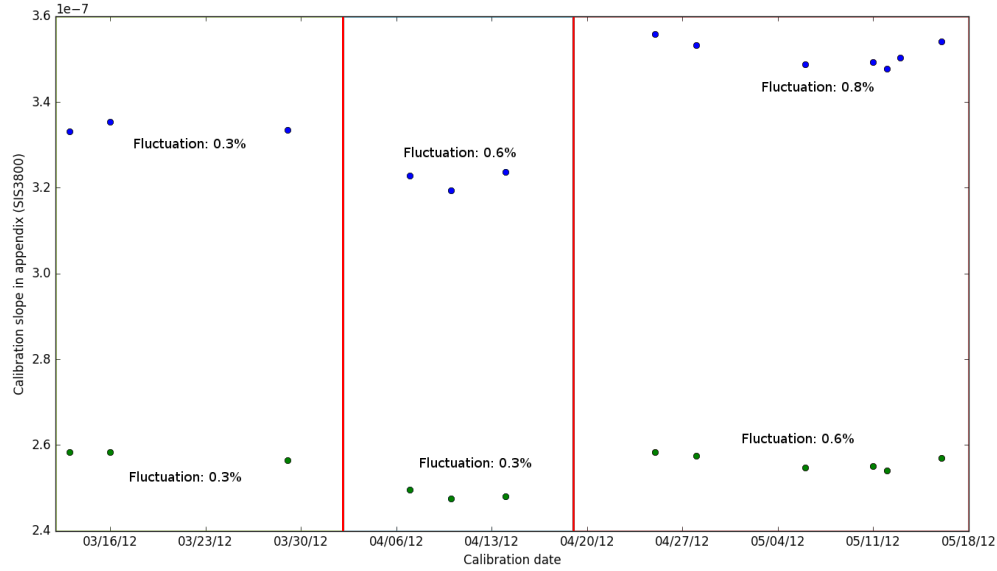


Figure 14: BCM calibration constants change during 3/13/2012 - 5/18/2012. The blue dot is for upstream BCM, and the green dot is for downstream BCM (recorded in the SIS3800 scaler in right arm). The x axis is the calibration date, while the y axis is the slope recorded in the Appendix (SIS3800). The constants were changed in Apr.2 and Apr.19.

- Mar.5 10:00:13 - Mar.5 10:27:40 Gain changing
- Mar.5 10:27:41 - Mar.6 8:51:39 10/10/1 9/9/1 1 4
- Mar.6 8:51:40 - Mar.6 13:45:43 10/13/1 9/9/1 1 4
- Mar.6 13:45:44 - Mar.6 13:49:05 Gain changing
- Mar.6 13:49:06 - Mar.7 17:20:10 29/30/4 27/27/4 1 4
- Mar.7 17:20:11 - Mar.7 17:23:25 Gain changing
- Mar.7 17:23:25 - Mar.10 13:12:53 29/30/4 27/27/4 1 4
- Mar.10 13:12:54 - Mar.10 13:33:15 Gain changing
- Mar.10 13:33:16 - end 40/41/4 40/43/4 1 4

## References

- [1] J.-C. Denard, High Accuracy Beam Current Monitor System for CEBAF's Experimental Hall A, 2001 Particle Accelerator Conference, Chicago (2001) 2326 – 2328.
- [2] J. Musson, Functional Description of Algorithms Used in Digital Receivers, JLab Technical Report No. JLAB-TN-14-028.
- [3] S. H. Roger Flood, R. Suleiman, Helicity Control Board User's Guide, JLab Internal Manual (unpublished).  
URL <http://hallaweb.jlab.org/equipment/daq/HelicityUsersGuideFeb4.pdf>
- [4] C. Gu, Helicity Decoder for E08-027, JLab Technical Report, E08-027 Collaboration (unpublished).  
URL [http://hallaweb.jlab.org/experiment/g2p/collaborators/chao/technotes/Chao\\_TechNote\\_HelicityDecoder.pdf](http://hallaweb.jlab.org/experiment/g2p/collaborators/chao/technotes/Chao_TechNote_HelicityDecoder.pdf)

- 212 [5] Specification of HAPPEX II ADC Timing Board, Revision 1, JLab Technical Report (unpublished).  
 213 URL <http://halloweb.jlab.org/experiment/g2p/technotes/others/TimingBoard.pdf>
- 214 [6] R. Michaels, Precision Integrating HAPPEX ADC, JLab Technical Report (unpublished).  
 215 URL [http://halloweb.jlab.org/parity/prex/adc18/prex\\\_adc18\\\_spec.ps](http://halloweb.jlab.org/parity/prex/adc18/prex\_adc18\_spec.ps)
- 216 [7] E. Jastrzembski, A Flexible Vme Input/Output Module, JLab Technical Report (unpublished).  
 217 URL <https://coda.jlab.org/drupal/system/files/pdfs/HardwareManual/misc/FLEXIO.pdf>
- 218 [8] M. Bevins, A. Day, et al., Mechanical and Thermal Design of the CEBAF Hall A Beam  
 219 Calorimeter, in: Proceedings of 2005 Particle Accelerator Conference, 2005, pp. 3819–3821.  
 220 doi:10.1109/PAC.2005.1591634.
- 221 [9] Pengjia Zhu, et al, Beam Position Reconstruction for the g2p Experiment in Hall A at Jefferson Lab,  
 222 Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors  
 223 and Associated Equipment 808 (2016) 1 – 10. doi:<http://dx.doi.org/10.1016/j.nima.2015.10.086>.  
 224 URL <http://www.sciencedirect.com/science/article/pii/S0168900215013200>
- 225 [10] G2P Internal Elog, <https://halloweb.jlab.org/dvcslog/g2p/173>.
- 226 [11] O. Hansen, ROOT/C++ Analyzer for Hall A.  
 227 URL <http://halloweb.jlab.org/podd/index.html>
- 228 [12] J. Alcorn, et al., Basic instrumentation for hall a at jefferson lab, Nuclear Instruments and Methods in  
 229 Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment 522 (3)  
 230 (2004) 294 – 346. doi:<http://dx.doi.org/10.1016/j.nima.2003.11.415>.  
 231 URL <http://www.sciencedirect.com/science/article/pii/S0168900203033977>
- 232 [13] JLab webpage, [http://halloweb.jlab.org/equipment/beam/absol\\\_beam.html](http://halloweb.jlab.org/equipment/beam/absol\_beam.html).
- 233 [14] Y. Rousseau, Calibration of the Calorimeter, JLab Technical Report (unpublished).  
 234 URL <http://halloweb.jlab.org/experiment/g2p/technotes/others/calorimeter\%20RTD.pdf>

## 235 Appendix

current(nA)	280	25	50	75	100
energy(MeV)	2253.13	2252.94	2252.94	2252.94	2252.94
time	03/03/12 09:30 PM	03/13/12 04:00 PM	03/16/12 10:15 PM	03/29/12 12:21 AM	04/07/12 03:00 PM
Avail period	Start 3.10 13:25	3.10 13:33 3.17 10:00	3.10 13:33 3.17 10:00	3.27 21:00 4.2 14:00	4.2 18:00 4.9 9:00
run avail(left SIS3800 up)	Start 3051	3052 3295	3052 3295	broken	3660 4695
run avail(left SIS3800 down)	Start 3051	3052 3634	3052 3634	3052 3634	3636 4695
run avail(left SIS3801 up)	Start 3051	3052 3295	3052 3295	broken	3660 4695
run avail(left SIS3801 down)	Start 3051	3052 3634	3052 3634	3052 3634	3636 4695
run avail(left HAPPEX up)	Start 3051			3073 3634	3636 4695
run avail(left HAPPEX down)	Start 3051			3073 3634	3636 4695
runnumber	2665	3149	3254	3437	3856
SIS3800 upslope(slowclk)	1.37309e-06	3.32775e-07	3.34603E-07	2.30692e-07	3.22991E-07
SIS3800 upped(slowclk)	5.24344E+00	2.04717E+00	2.01363E+00	2.40785E+00	2.01757E+00
SIS3800 downslope(slowclk)	1.30711e-06	2.58036e-07	2.57738E-07	2.56379e-07	2.49656E-07
SIS3800 downped(slowclk)	6.91734E+00	2.76818E+00	2.73600E+00	2.58978E+00	2.73382E+00
SIS3800 upslope(fstclk)	1.37346e-06	3.32774e-07	3.34604E-07	2.30693e-07	3.22990E-07
SIS3800 upped(fstclk)	5.17426E-02	2.01725E-02	1.98515E-02	2.37558E-02	1.98845E-02
SIS3800 downslope(fstclk)	1.30736e-06	2.58035e-07	2.57739E-07	2.5638e-07	2.49655E-07
SIS3800 downped(fstclk)	6.82245E-02	2.72772E-02	2.69731E-02	2.55486E-02	2.69437E-02
SIS3801 upslope(fstclk)	1.47161e-06	3.65962e-07	3.58951e-07	2.4832e-07	3.46231e-07
SIS3801 upped(fstclk)	5.15461E-02	3.09438E-02	1.98588E-02	2.37232E-02	1.98880E-02
SIS3801 downslope(fstclk)	1.40127e-06	2.83756e-07	2.76493e-07	2.7518e-07	2.67616e-07
SIS3801 downped(fstclk)	6.81238E-02	4.11454E-02	2.69735E-02	2.55914E-02	2.69484E-02
HAPPEX upslope	not avail			9.76018e-07	9.44277E-07
HAPPEX upped	not avail			7.47561E+02	7.64707E+02
HAPPEX downslope	not avail			7.81678e-07	7.59977E-07
HAPPEX downped	not avail			7.06877E+02	7.27266E+02

Table 2: BCM calibration constants for the left arm

current(nA)	50	75	50	25	50
energy(MeV)	1712.19	1708.35	1156.7	1156.7	2253.65
time	04/10/12 08:09 AM	04/14/12 07:07 PM	04/25/12 02:38 AM	04/28/12 10:15 AM	05/06/12 02:43 PM
Avail period	4.10 0:00 4.19 8:00	4.10 0:00 4.19 8:00	4.20 4:00 5.2 8:00	4.20 4:00 5.2 8:00	5.2 21:00 5.13 1:00
run avail(left SIS3800 up)	3660 4695	3660 4695	4698 5440	4698 5440	5485 6100
run avail(left SIS3800 down)	3636 4695	3636 4695	4698 5440	4698 5440	5485 6043
run avail(left SIS3801 up)	3660 4695	3660 4695	4698 5440	4698 5440	5485 6100
run avail(left SIS3801 down)	3636 4695	3636 4695	4698 5440	4698 5440	5485 6043
run avail(left HAPPEX up)			4698 5440	4698 5440	5485 6100
run avail(left HAPPEX down)			4698 5440	4698 5440	5485 6043
runnumber	4088	4405	5015	5214	5751
SIS3800 upslope(slowclk)	3.19668E-07	3.23814E-07	3.55483E-07	3.53225E-07	3.48943E-07
SIS3800 upped(slowclk)	2.02148E+00	2.02217E+00	1.99755E+00	2.03317E+00	2.00619E+00
SIS3800 downslope(slowclk)	2.47684E-07	2.48227E-07	2.58163E-07	2.57395E-07	2.54841E-07
SIS3800 downped(slowclk)	2.73704E+00	2.74181E+00	2.71992E+00	2.75600E+00	2.74454E+00
SIS3800 upslope(fstclk)	3.19669E-07	3.23815E-07	3.55483E-07	3.53221E-07	3.48942E-07
SIS3800 upped(fstclk)	1.99247E-02	1.99301E-02	1.96837E-02	2.00331E-02	1.97694E-02
SIS3800 downslope(fstclk)	2.47685E-07	2.48228E-07	2.58163E-07	2.57392E-07	2.54841E-07
SIS3800 downped(fstclk)	2.69776E-02	2.70227E-02	2.68033E-02	2.71552E-02	2.70453E-02
SIS3801 upslope(fstclk)	3.42781e-07	3.4717e-07	3.81166e-07	3.78808e-07	3.7418e-07
SIS3801 upped(fstclk)	1.99254E-02	1.99350E-02	1.97021E-02	2.00361E-02	1.97749E-02
SIS3801 downslope(fstclk)	2.65591e-07	2.6613e-07	2.76814e-07	2.76033e-07	2.73271e-07
SIS3801 downped(fstclk)	2.69789E-02	2.70306E-02	2.68191E-02	2.71594E-02	2.70443E-02
HAPPEX upslope			1.04042E-06	1.03394E-06	1.02106E-06
HAPPEX upped			7.58219E+02	7.74628E+02	7.63704E+02
HAPPEX downslope			7.86150E-07	7.84135E-07	7.76177E-07
HAPPEX downped			7.25062E+02	7.39477E+02	7.35583E+02

Table 3: BCM calibration constants for the left arm

current(nA)	75	100	50	75
energy(MeV)	2253.34	2253.37	2252.94	3352.4
time	05/11/12 06:26 PM	05/12/12 05:48 PM	05/13/12 02:59 PM	05/16/12 11:41 PM
Avail period	5.2 21:00 5.13 1:00	5.2 21:00 5.13 1:00	5.13 1:00 5.14 8:00	5.14 15:00 end
run avail(left SIS3800 up)	5485 6100	5485 6100	5485 6100	6101 end
run avail(left SIS3800 down)	5485 6043	5485 6043	broken	6101 end(NR)
run avail(left SIS3801 up)	5485 6100	5485 6100	5485 6100	6101 end
run avail(left SIS3801 down)	5485 6043	5485 6043	broken	6101 end(NR)
run avail(left HAPPEX up)	5485 6100	5485 6100	5485 6100	6101 end
run avail(left HAPPEX down)	5485 6043	5485 6043	broken	6101 end(NR)
runnumber	5986	6035	6062	6174
SIS3800 upslope(slowclk)	3.49032E-07	3.47590E-07	3.50492E-07	3.55051e-07
SIS3800 upped(slowclk)	2.01442E+00	2.01317E+00	2.01224E+00	2.00844E+00
SIS3800 downslope(slowclk)	2.54925E-07	2.53945E-07	1.96575E-06	2.57619e-07
SIS3800 downped(slowclk)	2.72054E+00	2.71869E+00	2.71795E+00	2.73275E+00
SIS3800 upslope(fstclk)	3.49036E-07	3.47589E-07	3.50490E-07	3.55056e-07
SIS3800 upped(fstclk)	1.98566E-02	1.98398E-02	1.98255E-02	1.97970E-02
SIS3800 downslope(fstclk)	2.54928E-07	2.53944E-07	1.96567E-06	2.57623e-07
SIS3800 downped(fstclk)	2.68156E-02	2.67923E-02	2.67783E-02	2.69365E-02
SIS3801 upslope(fstclk)	3.74239e-07	3.72691e-07	3.75909e-07	3.80653e-07
SIS3801 upped(fstclk)	1.98584E-02	1.98459E-02	1.98381E-02	1.97998E-02
SIS3801 downslope(fstclk)	2.73332e-07	2.72283e-07	2.10829e-06	2.76198e-07
SIS3801 downped(fstclk)	2.68168E-02	2.67972E-02	2.68024E-02	2.69430E-02
HAPPEX upslope	1.02102E-06	1.01675E-06	1.02575E-06	1.03841e-06
HAPPEX upped	7.66377E+02	7.66642E+02	7.65561E+02	7.60940E+02
HAPPEX downslope	7.76257E-07	7.73150E-07	5.97952E-06	7.84284e-07
HAPPEX downped	7.26879E+02	7.26759E+02	7.23959E+02	7.29082E+02

Table 4: BCM calibration constants for the left arm



current(nA)	280	25	50	75	100
energy(MeV)	2253.13	2252.94	2252.94	2252.94	2252.94
time	03/03/12 09:30 PM	03/13/12 04:00 PM	03/16/12 10:15 PM	03/29/12 12:21 AM	04/07/12 03:00 PM
Avail period	Start 3.10 13:25	3.10 13:33 3.17 10:00	3.10 13:33 3.17 10:00	3.27 21:00 4.2 14:00	4.2 18:00 4.9 9:00
run avail(right SIS3800 up)	Start 22130	22131 22658	22131 22658	22131 22658	22660 22987
run avail(right SIS3800 down)	Start 22130	22131 22658	22131 22658	22131 22658	22660 22987
run avail(right SIS3801 up)	Start 22130	22131 22658	22131 22658	22131 22658	broken
run avail(right SIS3801 down)	Start 22130	22131 22658	22131 22658	22131 22658	broken
run avail(right HAPPEX up)	Start 22130			22158 22658	22660 23618
run avail(right HAPPEX down)	Start 22130			22158 22658	22660 23618
runnumber	21751	22238	22338	22470	22885
SIS3800 upslope(slowclk)	1.37212e-06	3.33141E-07	3.35299E-07	3.33446E-07	3.22819E-07
SIS3800 upped(slowclk)	5.23480E+00	2.04715E+00	2.01363E+00	1.88817E+00	2.01757E+00
SIS3800 downslope(slowclk)	1.30632e-06	2.58320E-07	2.58274E-07	2.56520E-07	2.49523E-07
SIS3800 downped(slowclk)	6.91143E+00	2.76815E+00	2.73599E+00	2.58975E+00	2.73382E+00
SIS3800 upslope(fstclk)	1.37253e-06	3.33139E-07	3.35301E-07	3.33445E-07	3.22818E-07
SIS3800 upped(fstclk)	5.16652E-02	2.01720E-02	1.98516E-02	1.86263E-02	1.98844E-02
SIS3800 downslope(fstclk)	1.30656e-06	2.58318E-07	2.58276E-07	2.56521E-07	2.49521E-07
SIS3800 downped(fstclk)	6.81632E-02	2.72768E-02	2.69733E-02	2.55485E-02	2.69437E-02
SIS3801 upslope(fstclk)	1.46934e-06	3.65342e-07	3.59699e-07	3.57709e-07	broken
SIS3801 upped(fstclk)	5.16033E-02	2.97348E-02	1.98585E-02	1.86580E-02	broken
SIS3801 downslope(fstclk)	1.39902e-06	2.83277e-07	2.77067e-07	2.75175e-07	broken
SIS3801 downped(fstclk)	6.81575E-02	3.95893E-02	2.69721E-02	2.55542E-02	broken
HAPPEX upslope	not avail			9.55044e-07	9.23204E-07
HAPPEX upped	not avail			1.75740E+03	1.75756E+03
HAPPEX downslope	not avail			7.81495e-07	7.59968E-07
HAPPEX downped	not avail			1.07545E+03	1.07213E+03

Table 5: BCM calibration constants for the right arm

current(nA)	50	75	50	25	50
energy(MeV)	1712.19	1708.35	1156.7	1156.7	2253.65
time	04/10/12 08:09 AM	04/14/12 07:07 PM	04/25/12 02:38 AM	04/28/12 10:15 AM	05/06/12 02:43 PM
Avail period	4.10 0:00 4.19 8:00	4.10 0:00 4.19 8:00	4.20 4:00 5.2 8:00	4.20 4:00 5.2 8:00	5.2 21:00 5.13 1:00
run avail(right SIS3800 up)	22600 23618	22600 23618	23621 24216	23621 24216	24259 24727
run avail(right SIS3800 down)	22600 23618	22600 23618	23621 24216	23621 24216	24259 24706
run avail(right SIS3801 up)	23075 23618	23075 23618	23621 24216	23621 24216	24259 24727
run avail(right SIS3801 down)	23075 23618	23075 23618	23621 24216	23621 24216	24259 24706
run avail(right HAPPEX up)			23621 24216	23621 24216	24259 24727
run avail(right HAPPEX down)			23621 24216	23621 24216	24259 24706
runnumber	23082	23360	23890	24040	24458
SIS3800 upslope(slowclk)	3.19449E-07	3.23652E-07	3.55750E-07	3.53327E-07	3.48757E-07
SIS3800 upped(slowclk)	2.02144E+00	2.02219E+00	1.99750E+00	2.03317E+00	2.00620E+00
SIS3800 downslope(slowclk)	2.47514E-07	2.48103E-07	2.58357E-07	2.57469E-07	2.54705E-07
SIS3800 downped(slowclk)	2.73699E+00	2.74179E+00	2.71988E+00	2.75600E+00	2.74454E+00
SIS3800 upslope(fstclk)	3.19451E-07	3.23653E-07	3.55750E-07	3.53323E-07	3.48756E-07
SIS3800 upped(fstclk)	1.99248E-02	1.99306E-02	1.96839E-02	2.00331E-02	1.97694E-02
SIS3800 downslope(fstclk)	2.47516E-07	2.48103E-07	2.58357E-07	2.57466E-07	2.54705E-07
SIS3800 downped(fstclk)	2.69778E-02	2.70229E-02	2.68034E-02	2.71552E-02	2.70453E-02
SIS3801 upslope(fstclk)	3.42548e-07	3.46997e-07	3.81454e-07	3.78918e-07	3.7398e-07
SIS3801 upped(fstclk)	1.99254E-02	1.99350E-02	1.97020E-02	2.00361E-02	1.97749E-02
SIS3801 downslope(fstclk)	2.6541e-07	2.65997e-07	2.77022e-07	2.76114e-07	2.73125e-07
SIS3801 downped(fstclk)	2.69789E-02	2.70307E-02	2.68188E-02	2.71595E-02	2.70442E-02
HAPPEX upslope			1.01836E-06	1.01194E-06	9.98575E-07
HAPPEX upped			1.76323E+03	1.77658E+03	1.76456E+03
HAPPEX downslope			7.86595E-07	7.84236E-07	7.75621E-07
HAPPEX downped			1.09454E+03	1.10431E+03	1.10078E+03

Table 6: BCM calibration constants for the right arm

current(nA)	75	100	50	75
energy(MeV)	2253.34	2253.37	2252.94	3352.4
time	05/11/12 06:26 PM	05/12/12 05:48 PM	05/13/12 02:59 PM	05/16/12 11:41 PM
Avail period	5.2 21:00 5.13 1:00	5.2 21:00 5.13 1:00	5.13 1:00 5.14 8:00	5.14 15:00 end
run avail(right SIS3800 up)	24259 24727	24259 24727	24259 24727	24728 end
run avail(right SIS3800 down)	24259 24706	24259 24706	broken	24728 end(NR)
run avail(right SIS3801 up)	24259 24727	24259 24727	24259 24727	24728 end
run avail(right SIS3801 down)	24259 24706	24259 24706	broken	24728 end(NR)
run avail(right HAPPEX up)	24259 24727	24259 24727	24259 24727	24728 end
run avail(right HAPPEX down)	24259 24706	24259 24706	broken	24728 end(NR)
runnumber	24671	24700	24719	24769
SIS3800 upslope(slowclk)	3.49296E-07	3.47708E-07	3.50342E-07	3.54078E-07
SIS3800 upped(slowclk)	2.01441E+00	2.01317E+00	2.01224E+00	2.00686E+00
SIS3800 downslope(slowclk)	2.55118E-07	2.54031E-07	1.96491E-06	2.56913E-07
SIS3800 downped(slowclk)	2.72053E+00	2.71870E+00	2.71795E+00	2.73056E+00
SIS3800 upslope(fstclk)	3.49301E-07	3.47708E-07	3.50340E-07	3.54078E-07
SIS3800 upped(fstclk)	1.98572E-02	1.98398E-02	1.98256E-02	1.97767E-02
SIS3800 downslope(fstclk)	2.55121E-07	2.54031E-07	1.96483E-06	2.56913E-07
SIS3800 downped(fstclk)	2.68159E-02	2.67923E-02	2.67784E-02	2.69082E-02
SIS3801 upslope(fstclk)	3.74523e-07	3.72818e-07	3.75748e-07	3.79606e-07
SIS3801 upped(fstclk)	1.98591E-02	1.98461E-02	1.98382E-02	1.97795E-02
SIS3801 downslope(fstclk)	2.7354e-07	2.72376e-07	2.10737e-06	2.75437e-07
SIS3801 downped(fstclk)	2.68172E-02	2.67970E-02	2.68023E-02	2.69125E-02
HAPPEX upslope	9.99842E-07	9.95083E-07	1.00323E-06	1.01328E-06
HAPPEX upped	1.77152E+03	1.77303E+03	1.77264E+03	1.76628E+03
HAPPEX downslope	7.76667E-07	7.73271E-07	5.97638E-06	7.82040E-07
HAPPEX downped	1.08914E+03	1.08845E+03	1.08867E+03	1.09584E+03

Table 7: BCM calibration constants for the right arm

current (nA)	280	25	50	75	100
energy (MeV)	2253.13	2252.94	2252.94	2252.94	2252.94
time	03/03/12 09:30 PM	03/13/12 04:00 PM	03/16/12 10:15 PM	03/29/12 12:21 AM	04/07/12 03:00 PM
Avail period	Start 3.10 13:25	3.10 13:33 3.17 10:00	3.10 13:33 3.17 10:00	3.27 21:00 4.2 14:00	4.2 18:00 4.9 9:00
run avail(third SIS3800 up)	not avail	40296 40668	40296 40668	40296 40668	40670 41419
run avail(third SIS3800 down)	not avail	broken	broken	40465 40668	40670 41419
run avail(third SIS3801 up)	not avail	40296 40668	40296 40668	40296 40668	40670 41419
run avail(third SIS3801 down)	not avail	broken	broken	40465 40668	40670 41419
runnumber		40368	40388	40486	40928
SIS3800 upslope(fstclk)	not avail	3.32885e-07	3.34957E-07	3.36286e-07	3.23371E-07
SIS3800 upped(fstclk)	not avail	2.01732E-02	1.98517E-02	1.98266E-02	1.98850E-02
SIS3800 downslope(fstclk)	not avail	1.2906e-07	1.29005E-07	2.5868e-07	2.49949E-07
SIS3800 downped(fstclk)	not avail	5.45561E-02	5.39468E-02	2.68700E-02	2.69434E-02
SIS3801 upslope(fstclk)	not avail	3.57236e-07	3.59326e-07	3.60744e-07	3.46631e-07
SIS3801 upped(fstclk)	not avail	2.02169E-02	1.98582E-02	1.98876E-02	1.98876E-02
SIS3801 downslope(fstclk)	not avail	1.38495e-07	1.38383e-07	2.77492e-07	2.67924e-07
SIS3801 downped(fstclk)	not avail	5.46740E-02	5.39542E-02	2.69487E-02	2.69487E-02

Table 8: BCM calibration constants for the third arm

current(nA)	50	75	50	25	50
energy(MeV)	1712.19	1708.35	1156.7	1156.7	2253.65
time	04/10/12 08:09 AM	04/14/12 07:07 PM	04/25/12 02:38 AM	04/28/12 10:15 AM	05/06/12 02:43 PM
Avail period	4.10 0:00 4.19 8:00	4.10 0:00 4.19 8:00	4.20 4:00 5.2 8:00	4.20 4:00 5.2 8:00	5.2 21:00 5.13 1:00
run avail(third SIS3800 up)	40670 41419	40670 41419	41420 41915	41420 41915	41922 42052
run avail(third SIS3800 down)	40670 41419	40670 41419	41420 41915	41420 41915	41922 42017
run avail(third SIS3801 up)	40670 41419	40670 41419	41420 41915	41420 41915	41922 42052
run avail(third SIS3801 down)	40670 41419	40670 41419	41420 41915	41420 41915	41922 42017
runnumber	41027	41256	41671	41846	41918
SIS3800 upslope(fstclk)	3.19302E-07	3.23944E-07	3.56080E-07	3.53600E-07	3.48498E-07
SIS3800 upped(fstclk)	1.99247E-02	1.99308E-02	1.96874E-02	2.00331E-02	1.97662E-02
SIS3800 downslope(fstclk)	2.47400E-07	2.48326E-07	2.58596E-07	2.57668E-07	2.54516E-07
SIS3800 downped(fstclk)	2.69776E-02	2.70230E-02	2.68065E-02	2.71551E-02	2.70411E-02
SIS3801 upslope(fstclk)	3.46631e-07	3.47304e-07	3.81801e-07	3.79211e-07	3.73698e-07
SIS3801 upped(fstclk)	1.98876E-02	1.99356E-02	1.97044E-02	2.00362E-02	1.97719E-02
SIS3801 downslope(fstclk)	2.67924e-07	2.66232e-07	2.77274e-07	2.76326e-07	2.72918e-07
SIS3801 downped(fstclk)	2.69487E-02	2.70302E-02	2.68213E-02	2.71590E-02	2.70400E-02

Table 9: BCM calibration constants for the third arm

current (nA)	75	100	50	75
energy (MeV)	2253.34	2253.37	2252.94	3352.4
time	05/11/12 06:26 PM	05/12/12 05:48 PM	05/13/12 02:59 PM	05/16/12 11:41 PM
Avail period	5.2 21:00 5.13 1:00	5.2 21:00 5.13 1:00	5.13 1:00 5.14 8:00	5.14 15:00 end
run avail(third SIS3800 up)	41922 42052	41922 42052	41922 42052	42053 end
run avail(third SIS3800 down)	41922 42017	41922 42017	broken	42053 end(NR)
run avail(third SIS3801 up)	41922 42052	not avail	41922 42052	42053 end
run avail(third SIS3801 down)	41922 42017	not avail	broken	42053 end(NR)
runnumber	41968	42008	42036	42126
SIS3800 upslope(fstclk)	3.49381E-07	3.47768E-07	3.50458E-07	3.54554E-07
SIS3800 upped(fstclk)	1.98550E-02	1.98381E-02	1.98268E-02	1.97758E-02
SIS3800 downslope(fstclk)	2.55180E-07	2.54075E-07	1.96554E-06	2.57258E-07
SIS3800 downped(fstclk)	2.68130E-02	2.67914E-02	2.67804E-02	2.69069E-02
SIS3801 upslope(fstclk)	3.74607e-07	not avail	3.75868e-07	3.80113e-07
SIS3801 upped(fstclk)	1.98589E-02	not avail	1.98389E-02	1.97786E-02
SIS3801 downslope(fstclk)	2.736e-07	not avail	2.10805e-06	2.75803e-07
SIS3801 downped(fstclk)	2.68173E-02	not avail	2.68024E-02	2.69116E-02

Table 10: BCM calibration constants for the third arm