
Hat Vibrator


SKU:U159
















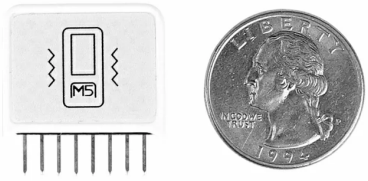





Description

The **Hat Vibrator** is a vibration motor compatible with the M5StickC/C-Plus series. It uses a cylindrical iron core patch motor model Z3OC1T8219731, with a motor speed of 12000 RPM. This product can produce various vibration effects, such as increasing or decreasing vibration levels, creating a "click" effect, generating different buzzer effects, and even vibrating in response to music/audio input. It can be applied to various electronic products for information prompts and touch feedback.

Features

- Motor rotates in a clockwise direction
- Speed: 12000 RPM
- Compatible with StickC/C-PLUS
- Supports platforms UIFlow, Arduino

Includes

- 1 x Hat Vibrator
- 1 x Double-sided tape

Applications


- Touch feedback
- Vibration information prompts

Specifications


Specification	Parameter
Motor Model	Z3OC1T8219731 Motor
Motor Structure	4 × 3mm Iron Core SMD Motor
Motor Poles	2 Poles (Built-in Magnetic Steel)
Rated Voltage	3.0V
Rated Current	85mA
Rated Speed	12000RPM
Operating Voltage	2.3V ~ 4.5V
Operating Environment	0~95% RH , 0-40℃
Vibration Frequency	10 ~ 55Hz
Product Size	24.0 x 21.0 x 14.0mm
Product Weight	4.7g
Package Size	136.0 x 92.0 x 14.0mm
Gross Weight	7.1g

Schematics

- Hat Vibrator Schematics PDF

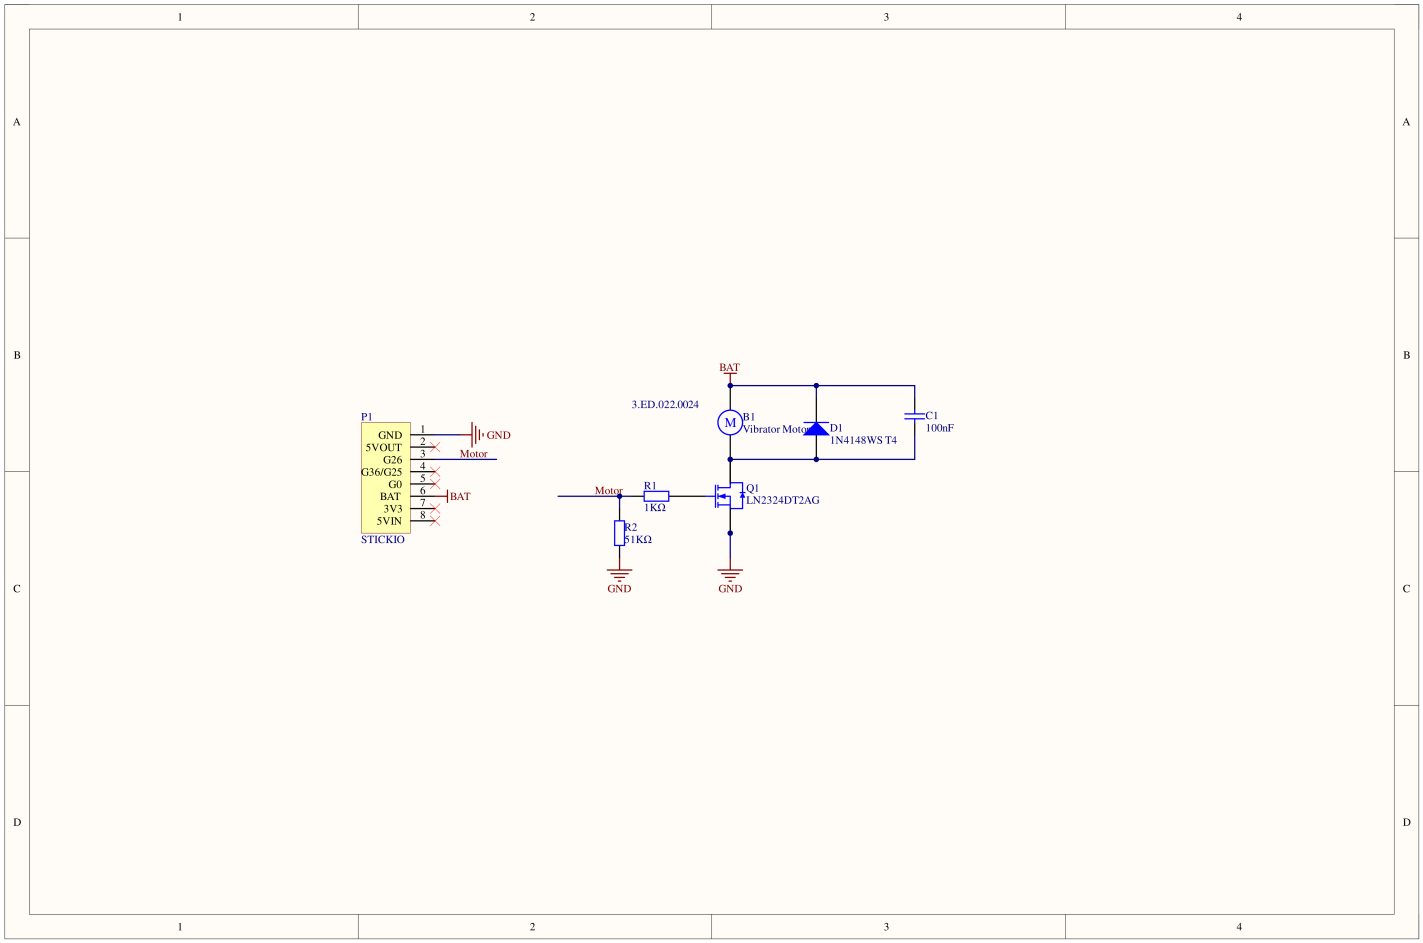
1
2
3
4
A
B
C
D
P1
GND
5VOUT
G26
G36/G25
G0
BAT
3V3
5VIN
STICKIO
GND
Motor
BAT
3.ED.022.0024
BAT
B1
Vibrator Motor
D1
1N4148WS T4
C1
100nF
Motor
R1
1KΩ
Q1
LN2324DT2AG
R2
51KΩ
GND
GND

Model Size

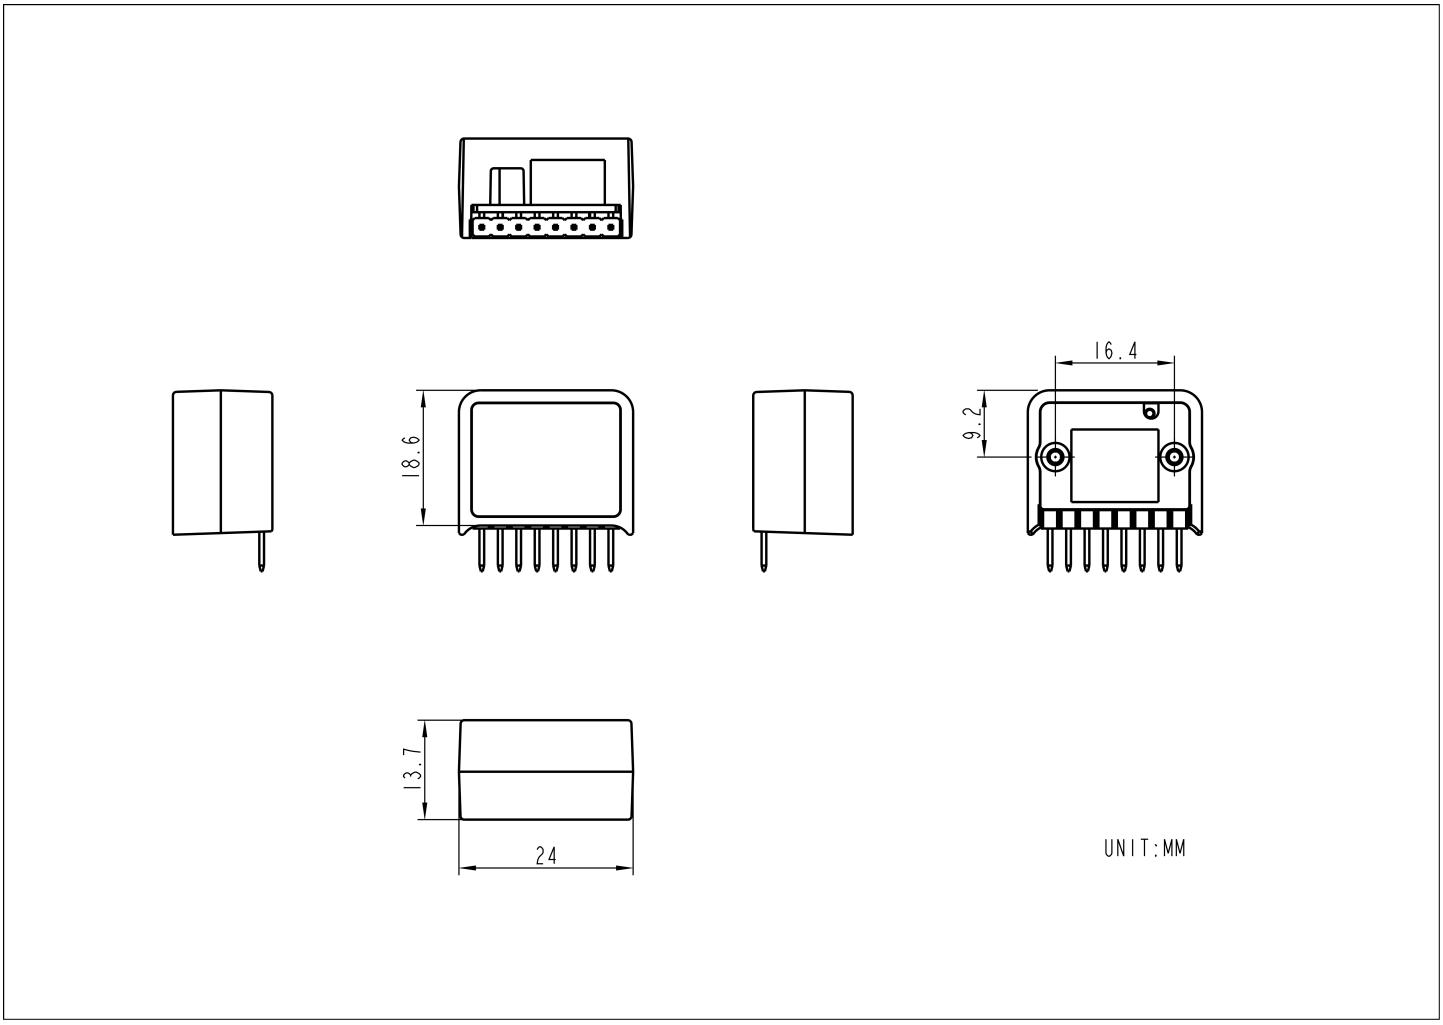

Datasheets

- Vibrator datasheet

Softwares

Arduino

- Hat Vibrator Example



UiFlow1

- Hat Vibrator UiFlow1 Documentation

UiFlow2

- Unit Vibrator UiFlow2 Docs