StackChan Body


SKU:A180

























Description

StackChan Body is the body part of the StackChan robot and can be used as a replacement for StackChan mainframe maintenance. The body includes a USB-C power/data interface, 550 mAh battery, two feedback-compatible servos (360° unlimited rotation horizontally and 90° vertically), 12 RGB LEDs (2 rows), infrared transmitter/receiver, a three-zone capacitive touch panel on top, full NFC, and other peripherals. It can replace the original body and is compatible with the StackChan AI desktop robot.

Note

Stackchan App

The Stackchan App supports connections only to original StackChan core controllers, including those in the standard StackChan unit and the Remote Controller Kit, as well as the separately sold StackChan Core replacement controller. Before use, the StackChan user firmware must be flashed to the device. Note that this app cannot connect to non-original core models such as CoreS3, CoreS3-SE, and CoreS3-Lite.

Features

- Replacement and maintenance module for StackChan body
- USB-C power/data connection
- 550 mAh battery
- Two servos with feedback (360° horizontal endless rotation, 90° vertical rotation)
- 12 RGB LEDs (2 rows)
- Infrared transmitter and receiver
- Top 3-zone touch panel

Includes

- 1 x StackChan Body
- 2 x M3 * 14mm screws (button head, mechanical thread)
- 1 x Hex Key L-Shape 1.5mm (For M2 Screw)
- 1 x Hex Key L-Shape 2.5mm (For M3 Screw)
- 1 x 1.25-4P male-to-female same-direction extension cable (100mm)

Applications


- StackChan body replacement


Specifications


Specification	Parameter
Motor	360° horizontal servo with feedback 90° vertical servo with feedback
Wireless	IR receiver IRM56384 + IR transmitter
Sensor	3-zone touch panel, driven by Si12T Full-featured NFC ST25R3916
Expansion Port	Grove interface * 2
Product Size	48.0 x 60.1 x 70.4mm
Product Weight	145.3g
Package Size	100.0 x 100.0 x 57.0mm
Gross Weight	201.5g


Schematics

- StackChan Base Adapter Board Schematic PDF
- StackChan Base Power Board Schematic PDF
- StackChan Base Ring Board Schematic PDF
- StackChan Base Touch Board Schematic PDF

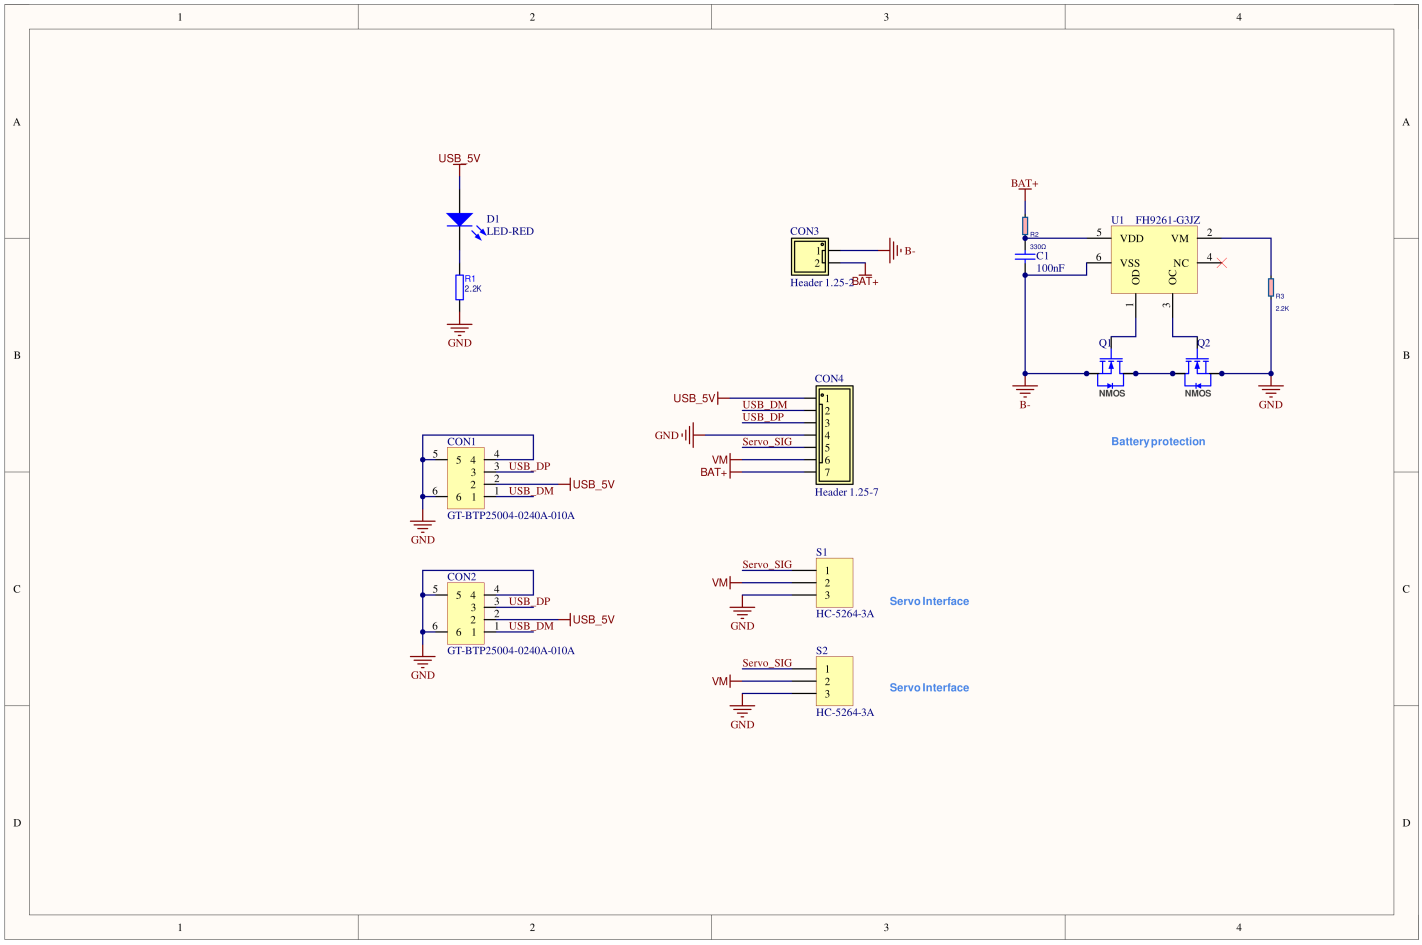

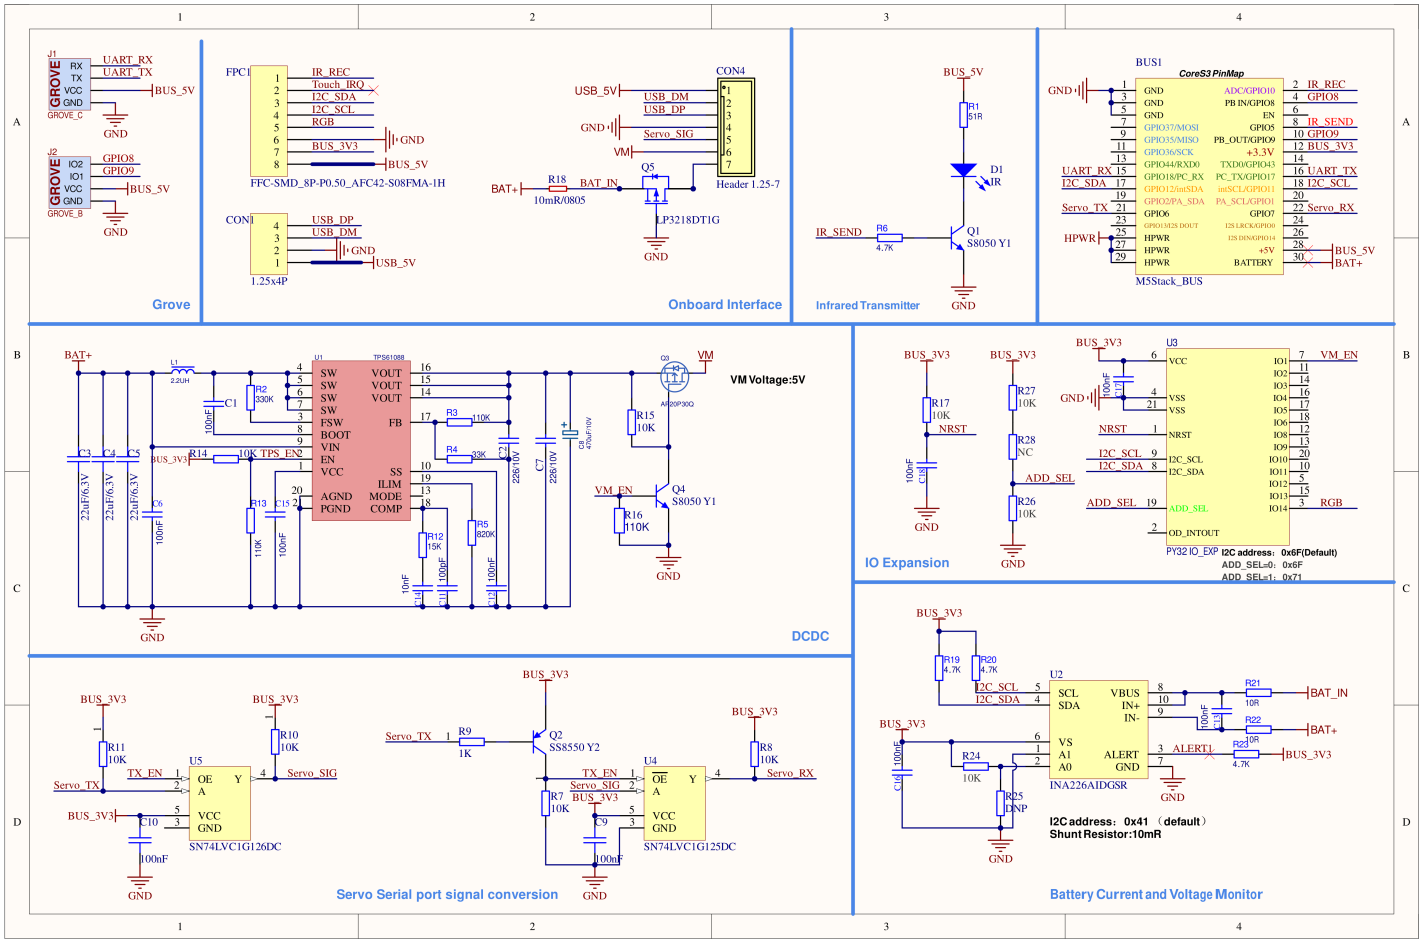

Grove
Onboard Interface
Infrared Transmitter
DCDC
VM Voltage:5V
IO Expansion
Servo Serial port signal conversion
Battery Current and Voltage Monitor
I2C address：0x6F(Default)
ADD_SEL=0：0x6F
ADD_SEL=1：0x71
I2C address：0x41 （default）
Shunt Resistor:10mR

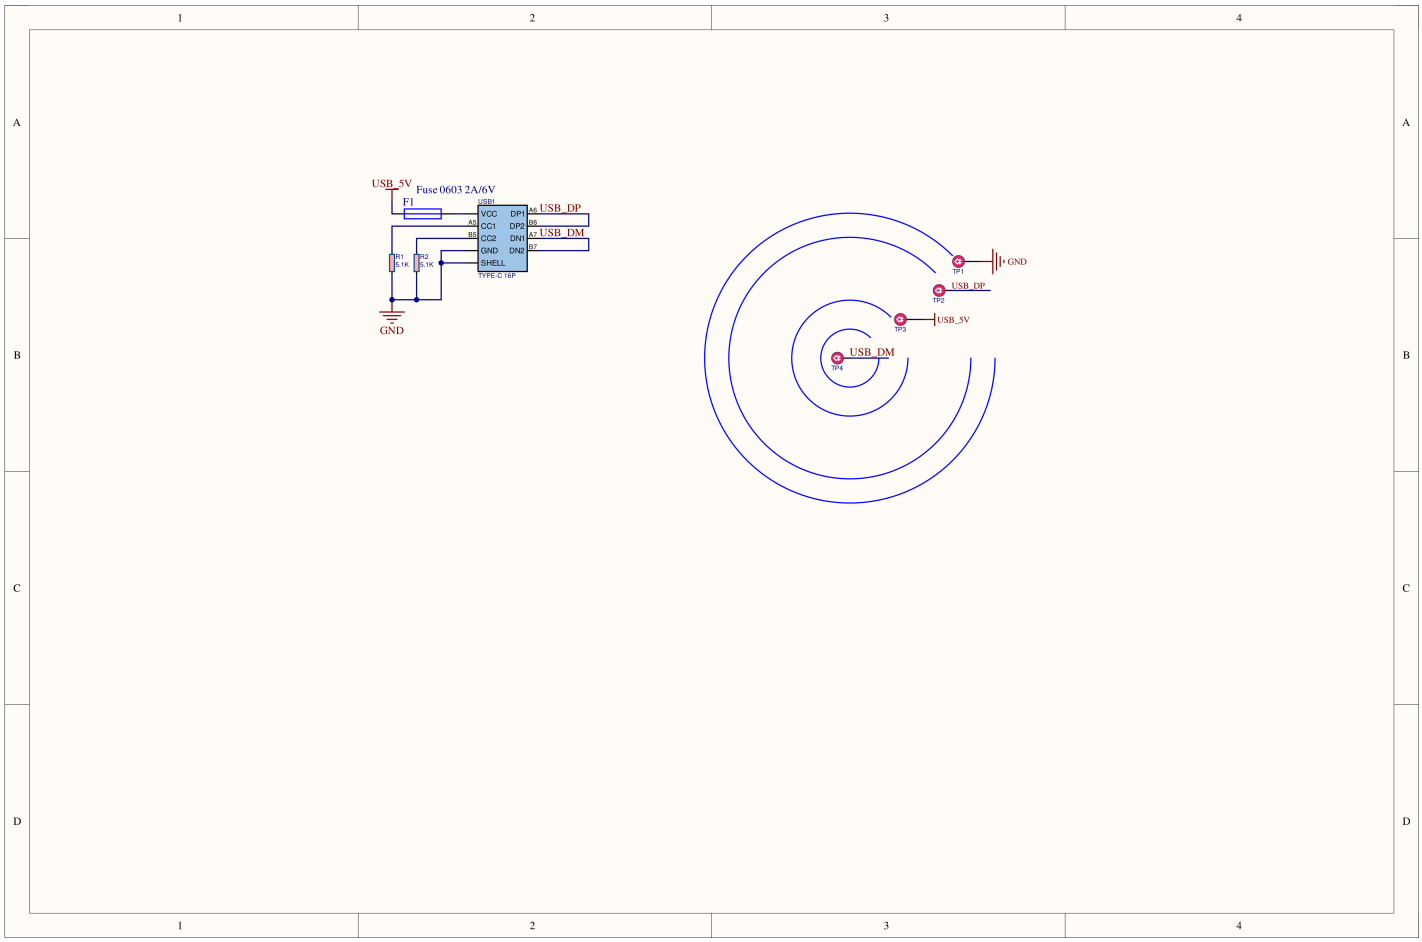
Fuse 0603 2A/6V
TYPE-C 16P

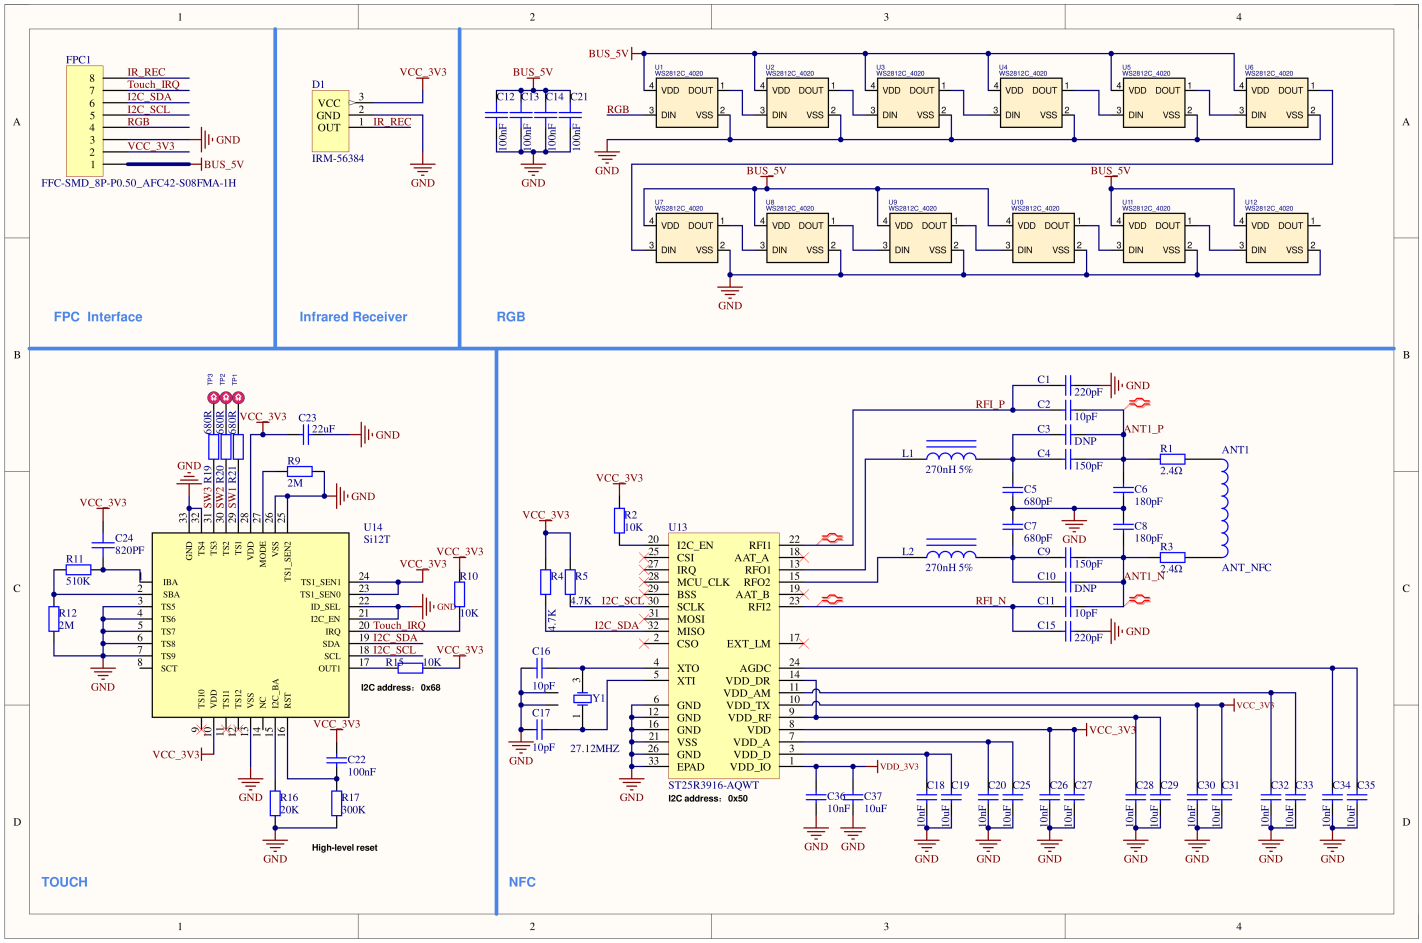

Model Size

- StackChan Body Model Size PDF

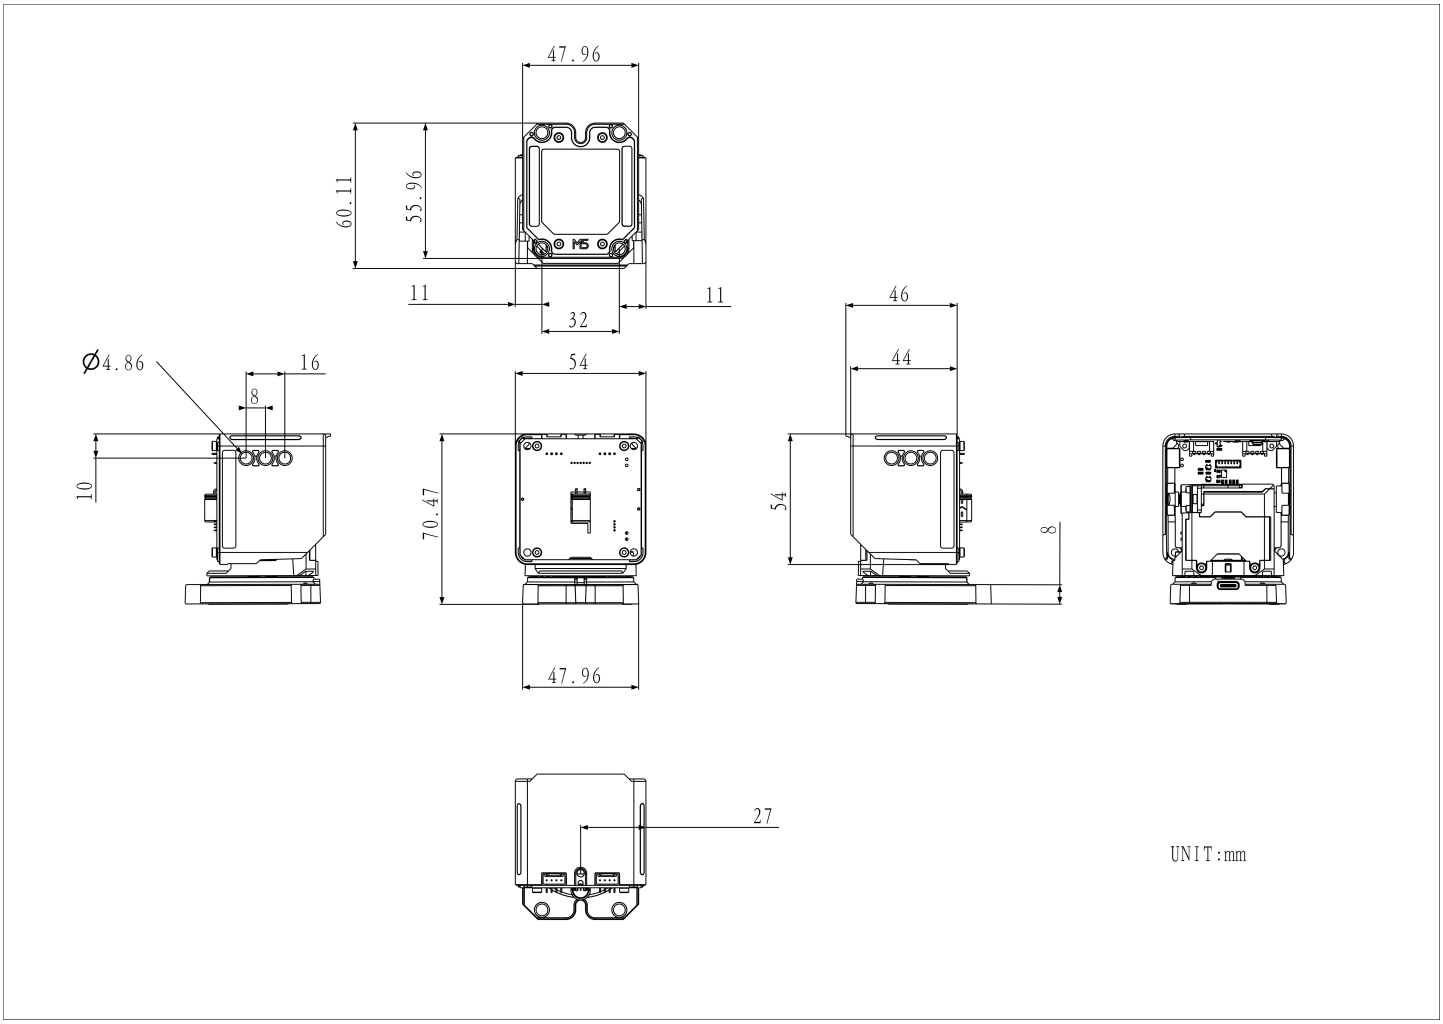

Structure

- StackChan Body Structure Files

Datasheet

- Servo SCS0009
- NFC ST25R3916
- Touch Chip Si12T
- Infrared Receiver IRM56384
- Battery Monitor INA226
- IO Expander PY32L020

Video