



Quadrature Encoder Interface (QEI)

HIGHLIGHTS

This section of the manual contains the following major topics:

1.0	Introduction	1-2
2.0	Control and Status Register Map	1-5
3.0	Module Description	1-20
4.0	QEI Operation in Power-Saving Modes	1-30
5.0	Effects of a Reset.....	1-30
6.0	Design Tips	1-31
7.0	Related Application Notes.....	1-32
8.0	Revision History	1-33

dsPIC33/PIC24 Family Reference Manual

Note: This family reference manual section is meant to serve as a complement to device data sheets. Depending on the device variant, this manual section may not apply to all dsPIC33/PIC24 devices.

Please consult the note at the beginning of the “**Quadrature Encoder Interface (QEI)**” chapter in the current device data sheet to determine whether this document supports the device you are using.

Device data sheets and family reference manual sections are available for download from the Microchip Worldwide Web site at: <http://www.microchip.com>

1.0 INTRODUCTION

The Quadrature Encoder Interface (QEI) module provides the interface to incremental encoders for obtaining mechanical position data. Quadrature encoders, also known as incremental encoders or optical encoders, detect position and speed of rotating motion systems. Quadrature encoders enable closed-loop control of motor control applications, such as Switched Reluctance (SR) and AC Induction Motors (ACIM).


A typical quadrature encoder includes a slotted wheel attached to the shaft of the motor and an emitter/detector module that senses the slots in the wheel. Typically, three output channels, Phase A (QEAx), Phase B (QEBx) and Index (INDXx) provide information on the movement of the motor shaft, including distance and direction.

The two channels, Phase A (QEA) and Phase B (QEB), are typically 90° out of phase with respect to each other. The Phase A and Phase B channels have a unique relationship. If Phase A leads Phase B, the direction of the motor is deemed positive or forward. If Phase A lags Phase B, the direction of the motor is deemed negative or reverse. The Index pulse occurs once per mechanical revolution and is used as a reference to indicate an absolute position. [Figure 1-1](#) illustrates the Quadrature Encoder Interface signals.

The quadrature signals from the encoder can have four unique states ('01', '00', '10' and '11') that reflect the relationship between QEA and QEB. [Figure 1-1](#) illustrates these states for one count cycle. The order of the states get reversed when the direction of travel changes.

The quadrature decoder increments or decrements the 32-bit up/down Position Counter (POSxCNT) for each Change-of-State (COS). The counter increments when QEA leads QEB and decrements when QEB leads QEA.

Figure 1-1: Quadrature Encoder Interface Signals

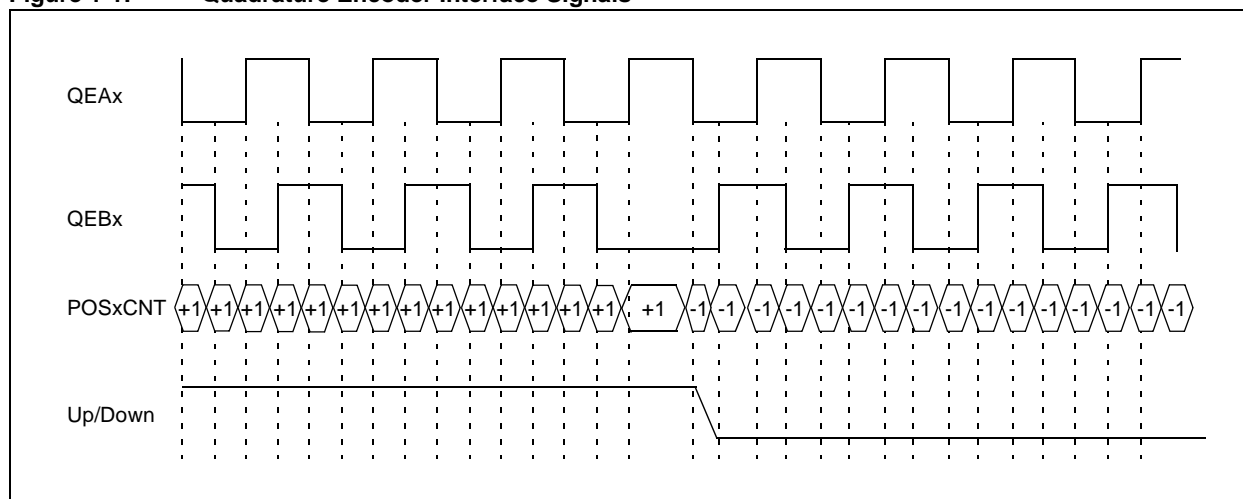

Quadrature Encoder Interface (QEI)

Table 1-1 shows the truth table that describes how the quadrature signals are decoded.

Table 1-1: Truth Table for Quadrature Encoder


Current Quadrature State		Previous Quadrature State		Action
QEA	QEB	QEA	QEB	
1	1	1	1	No count or direction change
1	1	1	0	Count up
1	1	0	1	Count down
1	1	0	0	Invalid state change, ignore
1	0	1	1	Count down
1	0	1	0	No count or direction change
1	0	0	1	Invalid state change, ignore
1	0	0	0	Count up
0	1	1	1	Count up
0	1	1	0	Invalid state change, ignore
0	1	0	1	No count or direction change
0	1	0	0	Count down
0	0	1	1	Invalid state change, ignore
0	0	1	0	Count down
0	0	0	1	Count up
0	0	0	0	No count or direction change

Figure 1-2 illustrates the simplified block diagram of the QEI module. The QEI module consists of decoder logic to interpret the Phase A (QEA) and Phase B (QEB) signals, and an Up/Down Counter to accumulate the count. The counter pulses are generated when the quadrature state changes. The count direction information must be maintained in a register until a direction change is detected. The module also includes digital noise filters, which condition the input signal.

The QEI module consists of the following major features:

- Four input pins: two phase signals, an Index pulse and a Home pulse
- Programmable digital noise filters on inputs
- Quadrature decoder providing counter pulses and count direction
- Count direction status
- x4 count resolution
- Index (INDX) pulse to reset the Position Counter
- General purpose 32-bit Timer/Counter mode
- Interrupts generated by QEI or counter events
- Up to 32-bit Velocity Counter
- 32-bit Position Counter
- 32-bit Index Pulse Counter
- 32-bit Interval Timer
- 32-bit position Initialization/Capture/Compare High Word register
- 32-bit position Initialization/Capture/Compare Low Word register
- 4X Quadrature Count mode
- External Up/Down Count mode
- External Gated Count mode
- External Gated Timer mode
- Interval Timer mode

Figure 1-2: Quadrature Encoder Interface (QEI) Module Block Diagram

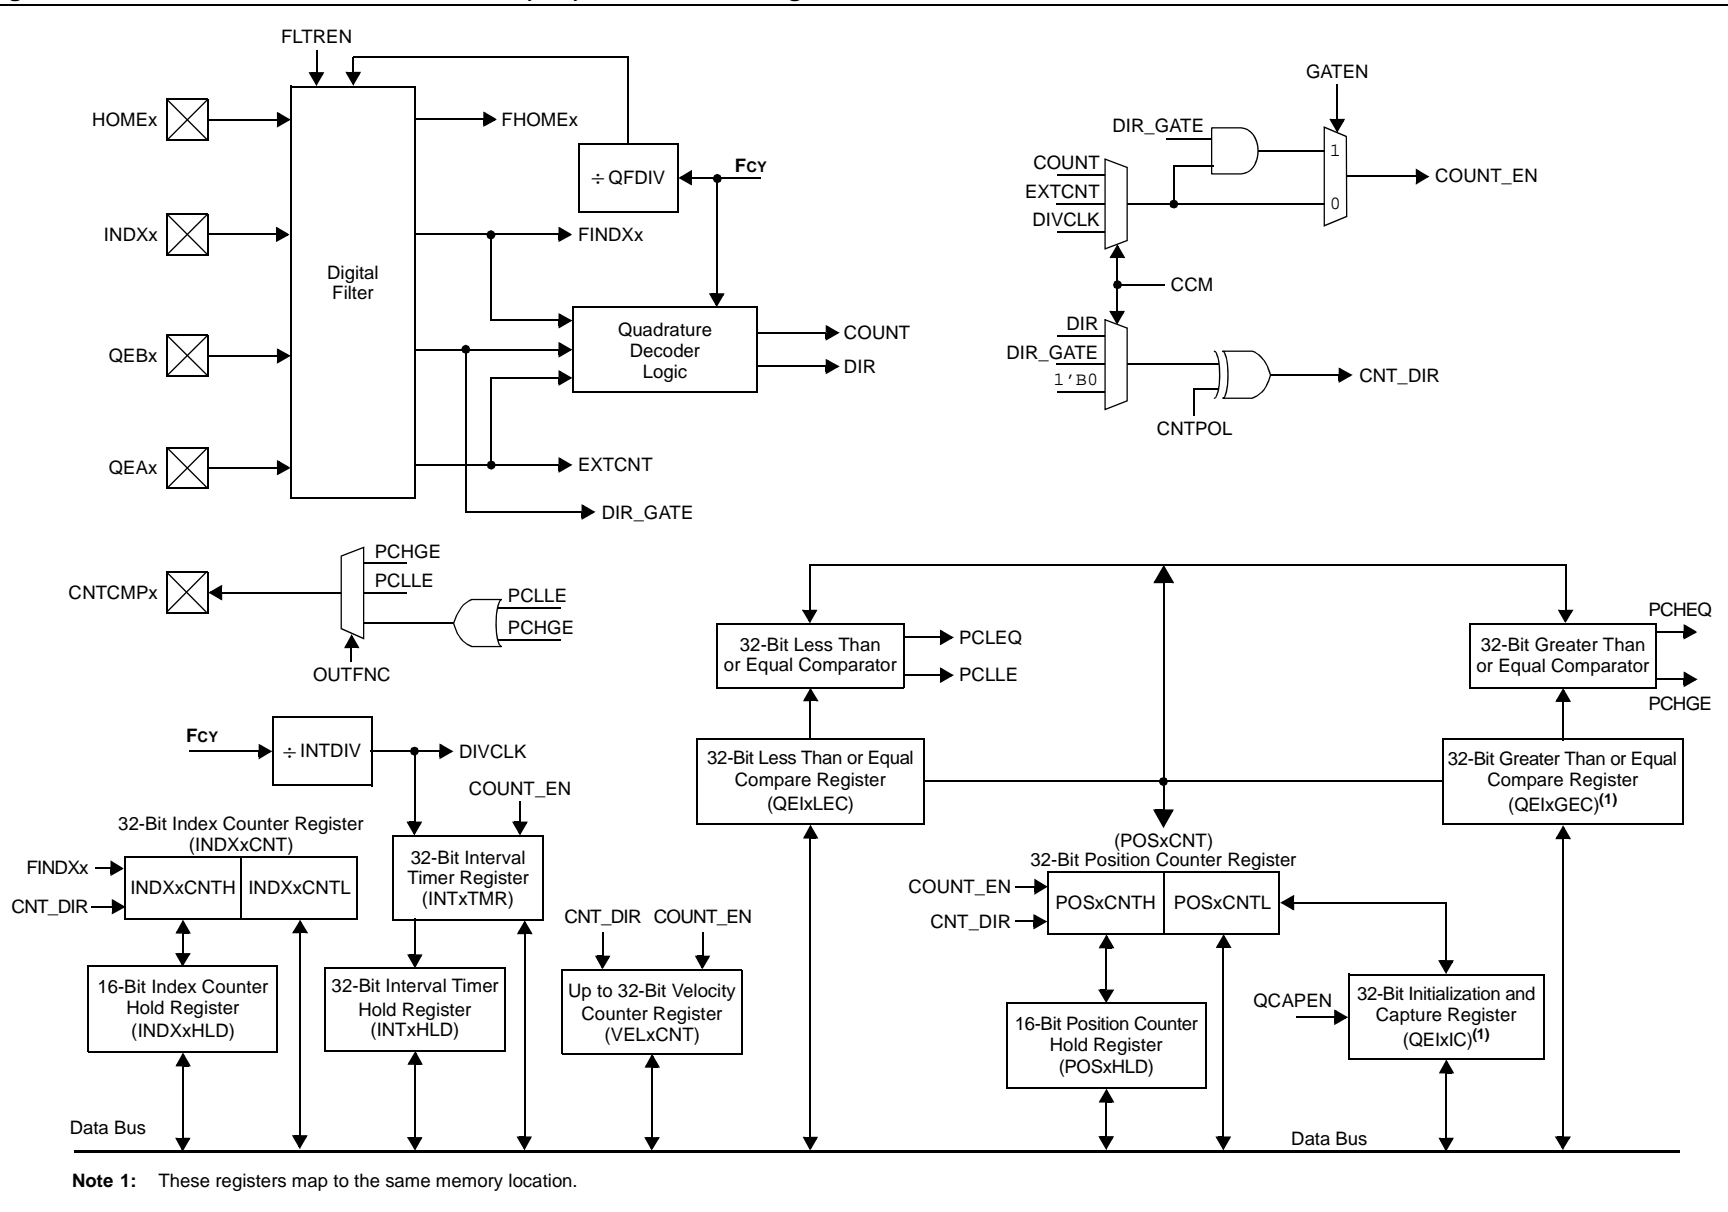

2.0 CONTROL AND STATUS REGISTER MAP

A summary of the registers associated with the dsPIC33/PIC24 Family Reference Manual's Quadrature Encoder Interface (QEI) module is provided in [Table 2-1](#).

Table 2-1: QEI Register Map

Name	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	All Resets
QEICON	QEIEN	—	QEISIDL	PIMOD<2:0>			IMV<1:0>		—	INTDIV<2:0>			CNTPOL	GATEN	CCM<1:0>		0x0000
QEIXIOC	QCAPEN	FLTREN	QFDIV<2:0>			OUTFNC<1:0>		SWPAB	HOMPOL	IDXPOL	QEBPOL	QEAPOL	HOME	INDEX	QEB	QEA	0x000x
QEIXIOCH ⁽¹⁾	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	HCAPEN	0x0000
QEIXSTAT	—	—	PCHEQIRQ	PCHEQIEN	PCLEQIRQ	PCLEQIEN	POSOVIRQ	POSOVIEN	PCIIRQ	PCIEN	VELOVIRQ	VELOVIEN	HOMIRQ	HOMIEN	IDXIRQ	IDXIEN	0x0000
POSxCNTL	POSCNT<15:0>																0x0000
POSxCNTH	POSCNT<31:16>																0x0000
POSxHLD	POSHLD<15:0>																0x0000
VELxCNTL	VELCNT<15:0>																0x0000
VELxCNTH ⁽¹⁾	VELCNT<31:16>																0x0000
VELxHLD ⁽¹⁾	VELHL<15:0>																0x0000
INTxTMRL	INTTMR<15:0>																0x0000
INTxTMRH	INTTMR<31:16>																0x0000
INTxHLDL	INTHLD<15:0>																0x0000
INTxHLDH	INTHLD<31:16>																0x0000
INDXxCNTL	INDXCNT<15:0>																0x0000
INDXxCNTH	INDXCNT<31:16>																0x0000
INDXxHLD	INDXHLD<15:0>																0x0000
QEIXICL	QEIIC<15:0>																0x0000
QEIXICH	QEIIC<31:16>																0x0000
QEIXLECL	QEILEC<15:0>																0x0000
QEIXLECH	QEILEC<31:16>																0x0000
QEIXGECL	QEIGEC<15:0>																0x0000
QEIXGECH	QEIGEC<31:16>																0x0000

Legend: x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

Note 1: These registers are not available on all devices. Refer to the device-specific data sheet for availability.

dsPIC33/PIC24 Family Reference Manual

Register 2-1: QEIXCON: QEIX Control Register

R/W-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIEN	—	QEISIDL	PIMOD<2:0> ^(1,5)			IMV<1:0> ⁽²⁾	
bit 15							bit 8

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	INTDIV<2:0> ⁽³⁾			CNTPOL	GATEN	CCM<1:0>	
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15 **QEIEN:** Quadrature Encoder Interface Module Counter Enable bit
 1 = Module counters are enabled
 0 = Module counters are disabled, but SFRs can be read or written
- bit 14 **Unimplemented:** Read as '0'
- bit 13 **QEISIDL:** QEI Stop in Idle Mode bit
 1 = Discontinues module operation when device enters Idle mode
 0 = Continues module operation in Idle mode
- bit 12-10 **PIMOD<2:0>:** Position Counter Initialization Mode Select bits^(1,5)
 111 = Modulo Count mode for Position Counter and every Index input event resets the Position Counter⁽⁴⁾
 110 = Modulo Count mode for Position Counter
 101 = Resets the Position Counter when the Position Counter equals the QEIXGEC register
 100 = Second Index event after Home event initializes Position Counter with contents of QEIXIC register
 011 = First Index event after Home event initializes Position Counter with contents of QEIXIC register
 010 = Next Index input event initializes the Position Counter with contents of QEIXIC register
 001 = Every Index input event resets the Position Counter
 000 = Index input event does not affect Position Counter
- bit 9-8 **IMV<1:0>:** Index Match Value bits⁽²⁾
 11 = Index match occurs when QEB = 1 and QEA = 1
 10 = Index match occurs when QEB = 1 and QEA = 0
 01 = Index match occurs when QEB = 0 and QEA = 1
 00 = Index match occurs when QEB = 0 and QEA = 1
- bit 7 **Unimplemented:** Read as '0'

- Note 1:** When CCMx = 10 or CCMx = 11, all of the QEI Counters operate as timers and the PIMOD<2:0> bits are ignored.
- 2:** When CCMx = 00, and QEA and QEB values match the Index Match Value (IMV), the POSxCNTH and POSxCNTL registers are reset.
- 3:** The selected clock rate should be at least twice the expected maximum quadrature count rate.
- 4:** Not all devices support this mode. Refer to the device-specific data sheet for availability.
- 5:** The QCAPEN and HCAPEN bits must be cleared during PIMODx Modes 2 through 7 to ensure proper functionality. Not all devices support HCAPEN. Refer to the device-specific data sheet for availability.

Quadrature Encoder Interface (QEI)

Register 2-1: QEIxCON: QEIx Control Register (Continued)

- bit 6-4 **INTDIV<2:0>**: Timer Input Clock Prescale Select bits⁽³⁾
(Interval Timer, Main Timer (Position Counter), Velocity Counter and Index Counter internal clock divider select)
- 111 = 1:256 prescale value
 - 110 = 1:64 prescale value
 - 101 = 1:32 prescale value
 - 100 = 1:16 prescale value
 - 011 = 1:8 prescale value
 - 010 = 1:4 prescale value
 - 001 = 1:2 prescale value
 - 000 = 1:1 prescale value
- bit 3 **CNTPOL**: Position and Index Counter/Timer Direction Select bit
- 1 = Counter direction is negative unless modified by external up/down signal
 - 0 = Counter direction is positive unless modified by external up/down signal
- bit 2 **GATEN**: External Count Gate Enable bit
- 1 = External gate signal controls Position Counter operation
 - 0 = External gate signal does not affect Position Counter/timer operation
- bit 1-0 **CCM<1:0>**: Counter Control Mode Selection bits
- 11 = Internal Timer mode
 - 10 = External Clock Count with External Gate mode
 - 01 = External Clock Count with External Up/Down mode
 - 00 = Quadrature Encoder mode

- Note 1:** When CCMx = 10 or CCMx = 11, all of the QEI Counters operate as timers and the PIMOD<2:0> bits are ignored.
- 2:** When CCMx = 00, and QEA and QEB values match the Index Match Value (IMV), the POSxCNTH and POSxCNTL registers are reset.
- 3:** The selected clock rate should be at least twice the expected maximum quadrature count rate.
- 4:** Not all devices support this mode. Refer to the device-specific data sheet for availability.
- 5:** The QCAPEN and HCAPEN bits must be cleared during PIMODx Modes 2 through 7 to ensure proper functionality. Not all devices support HCAPEN. Refer to the device-specific data sheet for availability.

dsPIC33/PIC24 Family Reference Manual

Register 2-2: QEIO: QEIO I/O Control Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QCAPEN	FLTREN	QFDIV<2:0>			OUTFNC<1:0>		SWPAB
bit 15							bit 8

R/W-0	R/W-0	R/W-0	R/W-0	R-x	R-x	R-x	R-x
HOMPOL	IDXPOL	QEBPOL	QEAPOL	HOME	INDEX	QEB	QEA
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15 **QCAPEN:** Position Counter Input Capture Enable bit
1 = HOMEx input event (positive edge) triggers a position capture event (HCAPEN must be cleared)
0 = HOMEx input event (positive edge) does not trigger a position capture event
- bit 14 **FLTREN:** QEAX/QEBX/INDXx/HOMEx Digital Filter Enable bit
1 = Input pin digital filter is enabled
0 = Input pin digital filter is disabled (bypassed)
- bit 13-11 **QFDIV<2:0>:** QEAX/QEBX/INDXx/HOMEx Digital Input Filter Clock Divide Select bits
111 = 1:256 clock divide
110 = 1:64 clock divide
101 = 1:32 clock divide
100 = 1:16 clock divide
011 = 1:8 clock divide
010 = 1:4 clock divide
001 = 1:2 clock divide
000 = 1:1 clock divide
- bit 10-9 **OUTFNC<1:0>:** QEIO Module Output Function Mode Select bits
11 = The CNTCMPx pin goes high when POSxCNT ≤ QEIOxLEC or POSxCNT ≥ QEIOxGEC
10 = The CNTCMPx pin goes high when POSxCNT ≤ QEIOxLEC
01 = The CNTCMPx pin goes high when POSxCNT ≥ QEIOxGEC
00 = Output is disabled
- bit 8 **SWPAB:** Swap QEAX and QEBX Inputs bit
1 = QEAX and QEBX are swapped prior to quadrature decoder logic
0 = QEAX and QEBX are not swapped
- bit 7 **HOMPOL:** HOMEx Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted
- bit 6 **IDXPOL:** INDXx Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted
- bit 5 **QEBPOL:** QEBX Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted
- bit 4 **QEAPOL:** QEAX Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted

Quadrature Encoder Interface (QEI)

Register 2-2: QEIXIOC: QEIX I/O Control Register (Continued)

bit 3	HOME: Status of HOMEx Input Pin After Polarity Control bit (read-only) 1 = Pin is at logic '1', if HOMPOL bit is set to '0' Pin is at logic '0', if HOMPOL bit is set to '1' 0 = Pin is at logic '0', if HOMPOL bit is set to '0' Pin is at logic '1', if HOMPOL bit is set to '1'
bit 2	INDEX: Status of INDXX Input Pin After Polarity Control bit (read-only) 1 = Pin is at logic '1', if IDXPOL bit is set to '0' Pin is at logic '0', if IDXPOL bit is set to '1' 0 = Pin is at logic '0', if IDXPOL bit is set to '0' Pin is at logic '1', if IDXPOL bit is set to '1'
bit 1	QEB: Status of QEBx Input Pin After Polarity Control and SWPAB Pin Swapping bit (read-only) 1 = Physical pin QEBx is at logic '1', if QEBPOL bit is set to '0' and SWPAB bit is set to '0' Physical pin QEBx is at logic '0', if QEBPOL bit is set to '1' and SWPAB bit is set to '0' Physical pin QEAx is at logic '1', if QEBPOL bit is set to '0' and SWPAB bit is set to '1' Physical pin QEAx is at logic '0', if QEBPOL bit is set to '1' and SWPAB bit is set to '1' 0 = Physical pin QEBx is at logic '0', if QEBPOL bit is set to '0' and SWPAB bit is set to '0' Physical pin QEBx is at logic '1', if QEBPOL bit is set to '1' and SWPAB bit is set to '0' Physical pin QEAx is at logic '0', if QEBPOL bit is set to '0' and SWPAB bit is set to '1' Physical pin QEAx is at logic '1', if QEBPOL bit is set to '1' and SWPAB bit is set to '1'
bit 0	QEA: Status of QEAx Input Pin After Polarity Control and SWPAB Pin Swapping bit (read-only) 1 = Physical pin QEAx is at logic '1', if QEAPOL bit is set to '0' and SWPAB bit is set to '0' Physical pin QEAx is at logic '0', if QEAPOL bit is set to '1' and SWPAB bit is set to '0' Physical pin QEBx is at logic '1', if QEAPOL bit is set to '0' and SWPAB bit is set to '1' Physical pin QEBx is at logic '0', if QEAPOL bit is set to '1' and SWPAB bit is set to '1' 0 = Physical pin QEAx is at logic '0', if QEAPOL bit is set to '0' and SWPAB bit is set to '0' Physical pin QEAx is at logic '1', if QEAPOL bit is set to '1' and SWPAB bit is set to '0' Physical pin QEBx is at logic '0', if QEAPOL bit is set to '0' and SWPAB bit is set to '1' Physical pin QEBx is at logic '1', if QEAPOL bit is set to '1' and SWPAB bit is set to '1'

Register 2-3: QEIXIOCH: QEIX I/O Control High Register⁽¹⁾

U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
—	—	—	—	—	—	—	—
bit 15							bit 8

U-0	U-0	U-0	U-0	U-0	U-0	U-0	R/W-0
—	—	—	—	—	—	—	HCAPEN
bit 7							bit 0

Legend:

R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared x = Bit is unknown

bit 15-1 **Unimplemented:** Read as '0'

bit 0 **HCAPEN:** Position Counter Input Capture by Home Event Enable bit
 1 = HOMEx input event (positive edge) triggers a position capture event
 0 = HOMEx input event (positive edge) does not trigger a position capture event

Note 1: This register is not present on all devices. Refer to the device-specific data sheet for availability.

dsPIC33/PIC24 Family Reference Manual

Register 2-4: QEIXSTAT: QEIX Status Register

U-0	U-0	R/C-0, HS	R/W-0	R/C-0, HS	R/W-0	R/C-0, HS	R/W-0
—	—	PCHEQIRQ	PCHEQIEN	PCLEQIRQ	PCLEQIEN	POSOVIRQ	POSOVIEN
bit 15						bit 8	

R/C-0, HS	R/W-0	R/C-0, HS	R/W-0	R/C-0, HS	R/W-0	R/C-0, HS	R/W-0
PCIIRQ ⁽¹⁾	PCIEN	VELOVIRQ	VELOVIEN	HOMIRQ	HOMIEN	IDXIRQ	IDXIEN
bit 7						bit 0	

Legend:	C = Clearable bit	HS = Hardware Settable bit
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared
		x = Bit is unknown

- bit 15-14 **Unimplemented:** Read as '0'
- bit 13 **PCHEQIRQ:** Position Counter Greater Than Compare Status bit
 1 = POSxCNT > QEIXGEC
 0 = POSxCNT < QEIXGEC
- bit 12 **PCHEQIEN:** Position Counter Greater Than Compare Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled
- bit 11 **PCLEQIRQ:** Position Counter Less Than Compare Status bit
 1 = POSxCNT < QEIXLEC
 0 = POSxCNT > QEIXLEC
- bit 10 **PCLEQIEN:** Position Counter Less Than Compare Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled
- bit 9 **POSOVIRQ:** Position Counter Overflow Status bit
 1 = Overflow has occurred
 0 = No overflow has occurred
- bit 8 **POSOVIEN:** Position Counter Overflow Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled
- bit 7 **PCIIRQ:** Position Counter (Homing) Initialization Process Complete Status bit⁽¹⁾
 1 = POSxCNT was reinitialized
 0 = POSxCNT was not reinitialized
- bit 6 **PCIEN:** Position Counter (Homing) Initialization Process Complete Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled
- bit 5 **VELOVIRQ:** Velocity Counter Overflow Status bit
 1 = Overflow has occurred
 0 = No overflow has occurred
- bit 4 **VELOVIEN:** Velocity Counter Overflow Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled
- bit 3 **HOMIRQ:** Status Flag for Home Event Status bit
 1 = Home event has occurred
 0 = No Home event has occurred

Note 1: This status bit is only applicable to PIMOD<2:0> modes, '011' and '100'.

Quadrature Encoder Interface (QEI)

Register 2-4: QEIXSTAT: QEIX Status Register (Continued)

- bit 2 **HOMIEN:** Home Input Event Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled
- bit 1 **IDXIRQ:** Status Flag for Index Event Status bit
 1 = Index event has occurred
 0 = No Index event has occurred
- bit 0 **IDXIEN:** Index Input Event Interrupt Enable bit
 1 = Interrupt is enabled
 0 = Interrupt is disabled

Note 1: This status bit is only applicable to PIMOD<2:0> modes, '011' and '100'.

dsPIC33/PIC24 Family Reference Manual

Register 2-5: POSxCNTL: Position x Counter Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
POSCNT<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
POSCNT<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **POSCNT<15:0>**: Low Word Used to Form 32-Bit Position Counter Register (POSxCNT) bits

Register 2-6: POSxCNTH: Position x Counter High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
POSCNT<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
POSCNT<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **POSCNT<31:16>**: High Word Used to Form 32-Bit Position Counter Register (POSxCNT) bits

Register 2-7: POSxHLD: Position x Counter Hold Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
POSHLD<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
POSHLD<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **POSHLD<15:0>**: Hold Register for Reading and Writing Position Counter High Word Register (POSxCNTH) bits

Quadrature Encoder Interface (QEI)

Register 2-8: VELxCNTL: Velocity x Counter Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
VELCNT<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
VELCNT<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-0 **VELCNT<15:0>**: Velocity Counter bits

Register 2-9: VELxCNTH: Velocity x Counter High Word Register⁽¹⁾

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
VELCNT<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
VELCNT<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-0 **VELCNT<31:16>**: Velocity Counter bits

Note 1: This register is not present on all devices. Refer to the device-specific data sheet for availability.

Register 2-10: VELxHLD: Velocity x Counter Hold Register⁽¹⁾

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
VELHLD<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
VELHLD<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-0 **VELHLD<15:0>**: Hold for Reading/Writing Velocity Counter Register (VELxCNT) bits

Note 1: This register is not present on all devices. Refer to the device-specific data sheet for availability.

dsPIC33/PIC24 Family Reference Manual

Register 2-11: INTxTMRL: Interval x Timer Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTTMR<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTTMR<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **INTTMR<15:0>**: Low Word Used to Form 32-Bit Interval Timer Register (INTxTMR) bits

Register 2-12: INTxTMRH: Interval x Timer High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTTMR<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTTMR<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **INTTMR<31:16>**: High Word Used to Form 32-Bit Interval Timer Register (INTxTMR) bits

Quadrature Encoder Interface (QEI)

Register 2-13: INTxHLDL: Interval x Timer Hold Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTHLD<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTHLD<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **INTHLD<15:0>**: Low Word Used to Form 32-Bit Interval Timer Hold Register (INTxHLD) bits

Register 2-14: INTxHLDH: Interval x Timer Hold High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTHLD<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INTHLD<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **INTHLD<31:16>**: High Word Used to Form 32-Bit Interval Timer Hold Register (INTxHLD) bits

dsPIC33/PIC24 Family Reference Manual

Register 2-15: INDXXCNTL: Index x Counter Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INDXCNT<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INDXCNT<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-0 **INDXCNT<15:0>**: Low Word Used to Form 32-Bit Index x Counter Register (INDXXCNT) bits

Register 2-16: INDXXCNTH: Index x Counter High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INDXCNT<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INDXCNT<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-0 **INDXCNT<31:16>**: High Word Used to Form 32-Bit Index x Counter Register (INDXXCNT) bits

Register 2-17: INDXXHLD: Index x Counter Hold Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INDXHLD<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
INDXHLD<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-0 **INDXHLD<15:0>**: Hold Register for Reading/Writing Index x Counter High Word Register (INDXXCNTH) bits

Quadrature Encoder Interface (QEI)

Register 2-18: QEIXICL: QEIX Initialization/Capture Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIIIC<15:8>							
bit 15							
bit 8							

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIIIC<7:0>							
bit 7							
bit 0							

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **QEIIIC<15:0>**: Low Word Used to Form 32-Bit Initialization/Capture Register (QEIXIC) bits

Register 2-19: QEIXICH: QEIX Initialization/Capture High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIIIC<31:24>							
bit 15							
bit 8							

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIIIC<23:16>							
bit 7							
bit 0							

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **QEIIIC<31:16>**: High Word Used to Form 32-Bit Initialization/Capture Register (QEIXIC) bits

dsPIC33/PIC24 Family Reference Manual

Register 2-20: QEIxLECL: QEIx Less Than or Equal Compare Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEILEC<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEILEC<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **QEILEC<15:0>**: Low Word Used to Form 32-Bit Less Than or Equal Compare Register (QEIxLEC) bits

Register 2-21: QEIxLECH: QEIx Less Than or Equal Compare High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEILEC<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEILEC<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **QEILEC<31:16>**: High Word Used to Form 32-Bit Less Than or Equal Compare Register (QEIxLEC) bits

Quadrature Encoder Interface (QEI)

Register 2-22: QEIXGECL: QEIX Greater Than or Equal Compare Low Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIGEC<15:8>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIGEC<7:0>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **QEIGEC<15:0>**: Low Word Used to Form 32-Bit Greater Than or Equal Compare Register (QEIXGEC) bits

Register 2-23: QEIXGECH: QEIX Greater Than or Equal Compare High Word Register

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIGEC<31:24>							
bit 15				bit 8			

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
QEIGEC<23:16>							
bit 7				bit 0			

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **QEIGEC<31:16>**: High Word Used to Form 32-Bit Greater Than or Equal Compare Register (QEIXGEC) bits

3.0 MODULE DESCRIPTION

3.1 Position Counter

The Position Counter is 32 bits wide and is contained in two separate 16-bit registers: POSxCNTL and POSxCNTH. The counter counts the number of pulses generated by an encoder.

To read the counter during the counter operation, the user application should first read the least significant word (lsw) of the counter value from the POSxCNTL register. When the lsw is read first, the contents of POSxCNTH are automatically transferred into a hold register, POSxHLD. The user application can then read the POSxHLD register to get the most significant word (msw) of the counter value. The Position x Counter Hold register (POSxHLD) ensures that the occurrence of a carry or borrow between the read operation does not affect the reading of a coherent 32-bit value.

To write a value to the POSxCNTL:POSxCNTH register pair, the user application should first write the msw to the POSxHLD register. When the lsw of the timer value is written to the POSxCNTL register, the contents of POSxHLD are automatically transferred to the POSxCNTH register. Thus, a coherent 32-bit value can be loaded into the Position Counter in a single clock cycle.

If the POSOVLEN bit in the QEIX Status register (QEIXSTAT<8>) is set, and the Position Counter rolls over from 0x7FFFFFFF to 0x80000000, or from 0x80000000 to 0x7FFFFFFF, an interrupt will be generated.

The operating mode of the Position Counter is controlled by the CCM<1:0> bits in the QEIX Control register (QEIXCON<1:0>). The Position Counter supports the following operating modes:

- Quadrature Count Mode
- External Count with External Up/Down Mode
- External Count with External Gate Mode
- Internal Timer Mode

3.1.1 QUADRATURE COUNT MODE


In this mode, the QEA/EXTCNT and QEB/DIR/GATE inputs are decoded to generate count pulses and direction information to control the POSxCNT and VELxCNT registers. The INDXXCNT register counts when a valid edge is detected on the INDXX input. [Figure 1-1](#) illustrates the timing diagram of the Quadrature Count mode operation.

Quadrature Encoder Interface (QEI)

3.1.2 EXTERNAL COUNT WITH EXTERNAL UP/DOWN MODE

In this mode, the QEAx/EXTCNT input is considered as an external count signal and the QEBx/DIR/GATE input provides the count direction information. The count direction is positive unless overridden by the CNTPOL bit in the QEIx Control register (QEIxCON<3>). [Figure 3-1](#) illustrates the timing diagram of an External Count with External Up/Down mode operation.

Figure 3-1: External Count with External Up/Down Mode

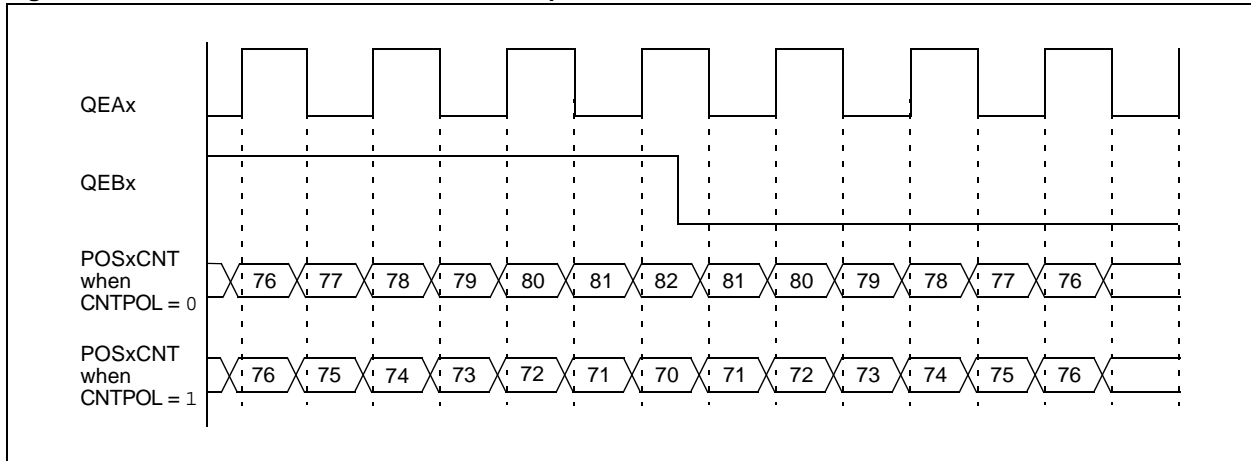


dsPIC33/PIC24 Family Reference Manual

3.1.3 EXTERNAL COUNT WITH EXTERNAL GATE MODE

In this mode, the QEAx/EXTCNT input is considered as an external count signal. If the GATEN bit in the QEIx Control register (QEIXCON<2>) is set, and QEBx/DIR/GATE = 0, the QEBx/DIR/GATE input will inhibit the counter signal. If the GATEN bit is cleared, the gate signal does not affect the counter operation. The default count direction is positive. If the CNTPOL bit in the QEIx Control register (QEIXCON<3>) is set, the count direction is negative. Figure 3-2 illustrates the timing diagram of an External Count with External Gate mode operation.

Figure 3-2: External Count with External Gate Mode

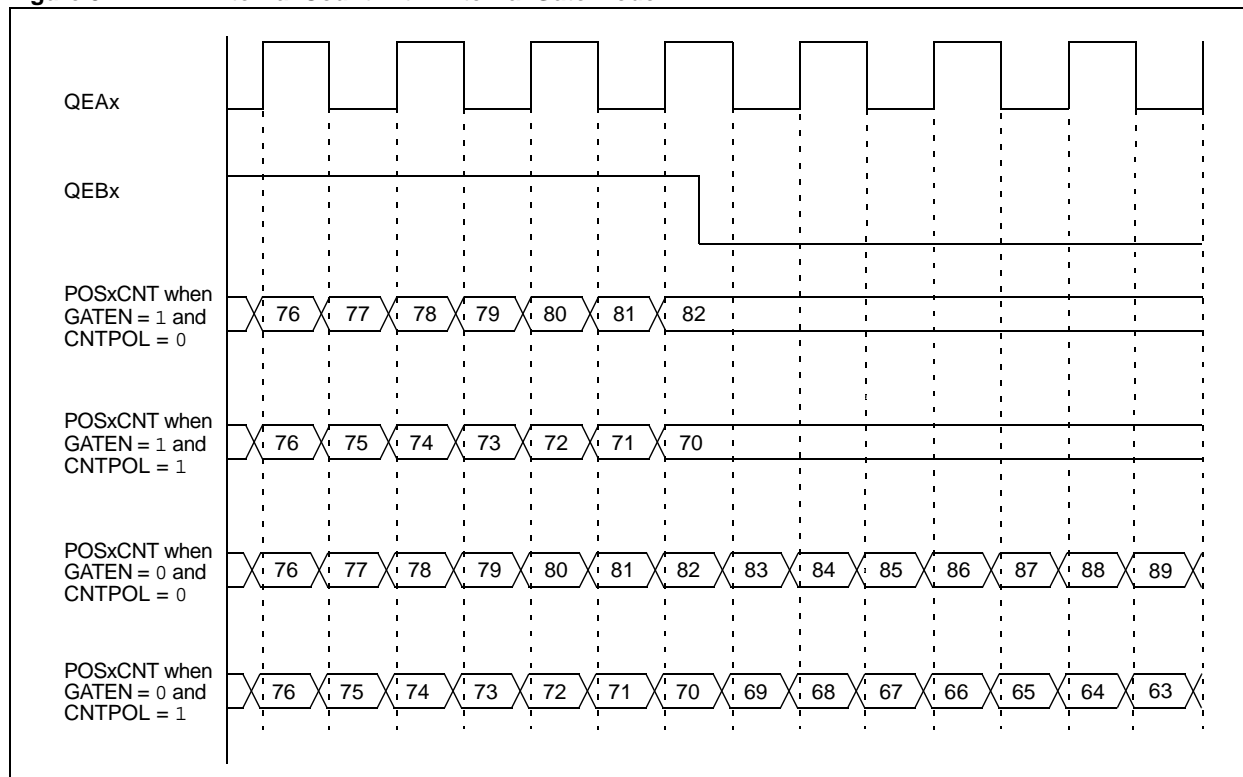


3.1.4 INTERNAL TIMER MODE

In this mode, the velocity, index and interval center of the Position Counter uses an internal clock as the count source. The internal clock is divided by the clock divider using the INTDIV<2:0> bits in the QEIx Control register (QEIXCON<6:4>). If the GATEN bit in the QEIx Control register (QEIXCON<2>) is set and QEBx/DIR/GATE = 0, the QEBx/DIR/GATE input will inhibit the counter signal. If the GATEN bit is cleared, the gate signal does not affect the operation of the counter. The default count direction is positive. If the CNTPOL bit in the QEIx Control register (QEIXCON<3>) is set, the count direction is negative. Figure 3-3 illustrates the timing diagram of an Internal Timer mode operation.

Note: Although the POSxCNT register allows byte accesses, reading from or writing to the POSxCNT register in Byte mode gives unpredictable results. As the hold register (POSxHLD) is only 16 bits wide, the operation in Byte mode is not recommended.

Quadrature Encoder Interface (QEI)

Figure 3-3: Internal Timer Mode

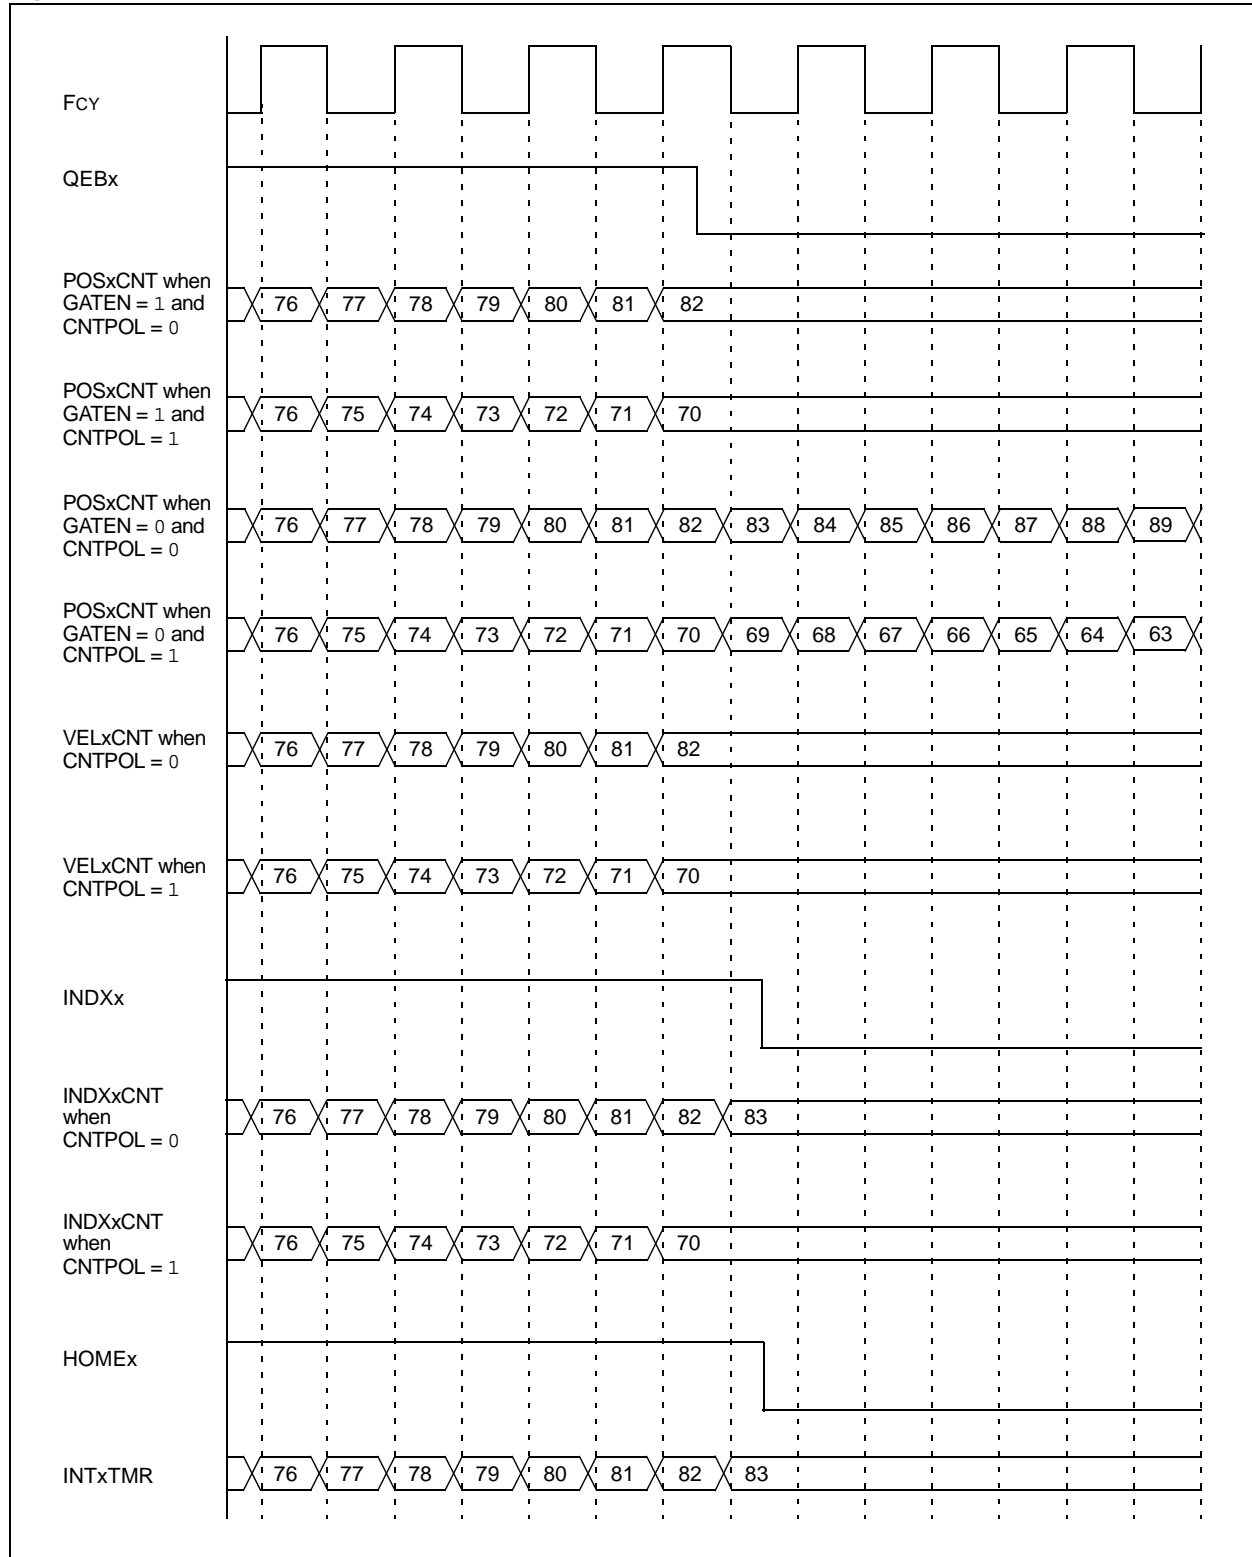


3.2 Velocity Counter

The Velocity Counter (VELxCNT) is a register that is up to 32 bits wide and increments or decrements based on the signal from the quadrature decoder logic. Refer to the device-specific data sheet for register width. Reading this register results in a counter Reset. The Index input or any of the modes specified by the PIMOD<2:0> bits in the QEIx Control register (QEIXCON<12:10>) does not affect the operation of the Velocity Counter. If the Velocity Counter rolls over from 0x7FFF to 0x8000, or from 0x8000 to 0x7FFF, and the VELOVIEN bit in the QEIX Status register (QEIXSTAT<4>) is set, an interrupt will be generated. Figure 3-4 illustrates the timing diagram of the Velocity Counter operation.

For devices that implement 32-bit Velocity registers, reads to the Velocity Counter during operation should first read the least significant word (lsb) of the counter value from the VELxCNTL register. When the lsb is read first, the contents of VELxCNTH are automatically transferred into a hold register (VELxHLD). The user application can then read the VELxHLD register to get the most significant word (msb) of the counter value. The hold register (VELxHLD) ensures that the occurrence of a carry or borrow between the read operation does not affect the reading of a coherent 32-bit value.

Note: The Velocity Counter specifies the distance traveled between the time interval of each sample. Reading the VELxCNT register results in a counter Reset. The user application should read the Velocity Counter at a rate of 1-4 kHz.

Figure 3-4: Velocity Counter

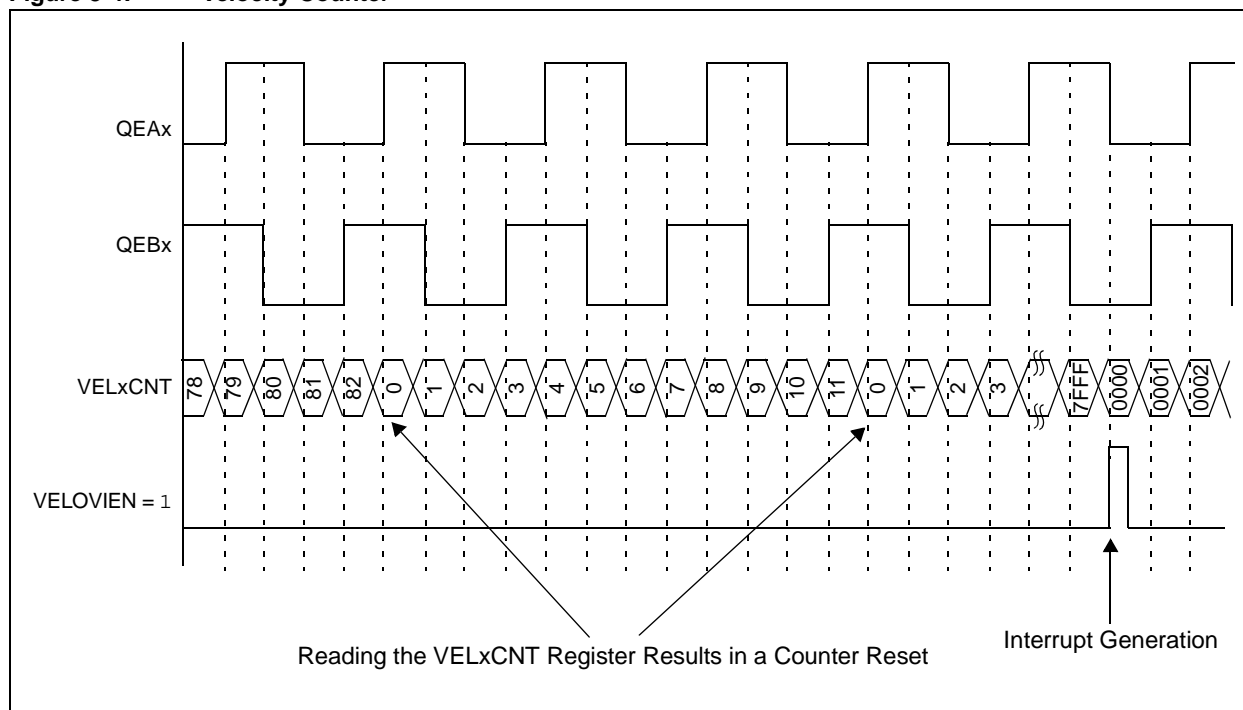

Quadrature Encoder Interface (QEI)

3.3 Index Counter

The Index Counter (INDXxCNT) is 32 bits wide and is contained in two separate 16-bit registers: INDXxCNTH and INDXxCNTL. It counts the Index events and is incremented or decremented based on the direction output of the quadrature logic decoder (see [Figure 1-2](#)). For more information, refer to [Section 3.7 “Index Event”](#).

To read the Index Counter during the counter operation, the user application should first read the lsw of the counter value from the INDXxCNTL register. When the lsw is read first, the contents of the INDXxCNTH register are automatically transferred into a hold register, INDXxHLD. The user application can then read the INDXxHLD register to get the msw of the counter value.

To write a value to the INDXxCNTH:INDXxCNTL register pair, the user application should first write the msw to the INDXxHLD register. When the lsw of the Index value is written to the INDXxCNTL register, the contents of the INDXxHLD register is automatically transferred to the INDXxCNTH register. Thus, a coherent 32-bit value can be loaded into the Index Counter in a single clock cycle.

Note: Although, the INDXxCNT register allows byte accesses, reading from or writing to the POSxCNT register in Byte mode gives unpredictable results. As the hold register (POSxHLD) is only 16 bits wide, the operation in Byte mode is not recommended.
--


3.4 Interval Timer

When a motor runs at a very low speed, the encoder does not generate enough pulses for accurate speed measurement. Therefore, instead of counting the number of pulses, the pulse duration can be measured. The 32-bit Interval Timer (INTxTMR) is used to measure the time interval between each decoded quadrature count pulse when the motor operates at a very low speed. The timer counts at a rate specified by the INTDIV<2:0> bits in the QEIx Control register (QEIxCON<6:4>). The Interval Timer is cleared when the first count pulse is detected. When the next count pulse is detected, the current contents of the Interval Timer are transferred to the Interval Hold registers (INTxHLDH and INTxHLDL), the Interval Timer is cleared and then the process repeats. The Interval Hold registers always contain the most recent completed timing measurements. [Figure 3-5](#) illustrates the timing diagram of the Interval Timer operation.

Note: If the INTxHLD register is read when a new position count pulse is detected, the contents of the INTxHLD register are not updated to avoid incoherent data reading.
--

dsPIC33/PIC24 Family Reference Manual

Figure 3-5: Interval Timer

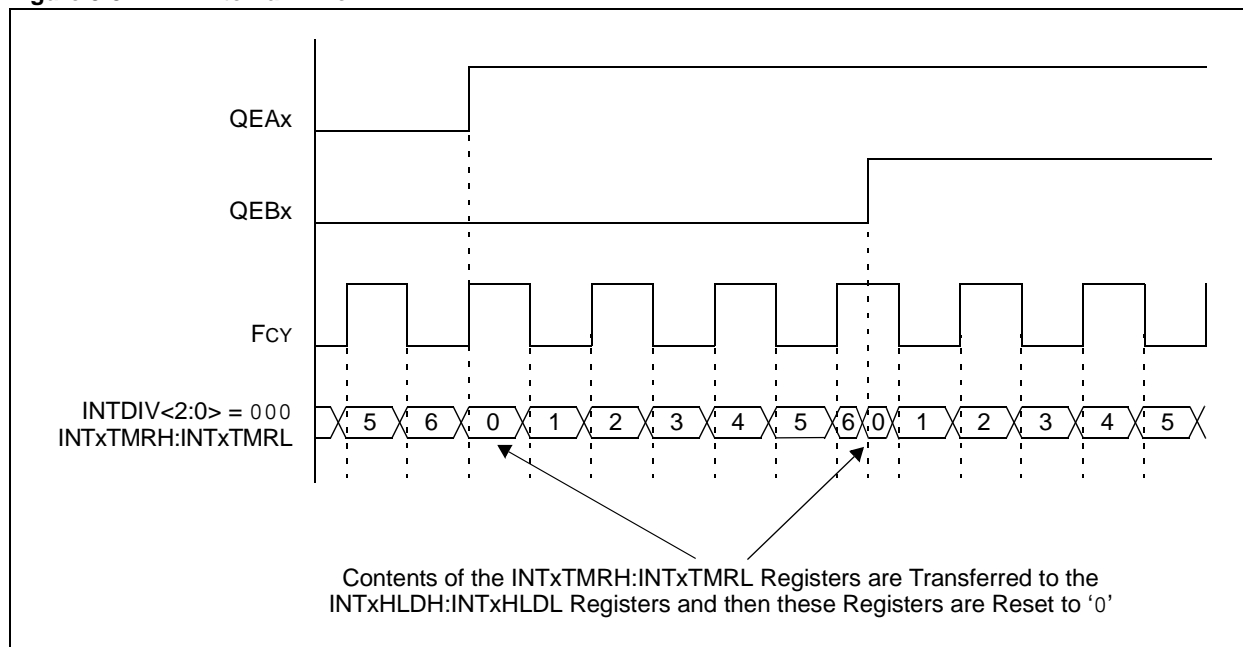

3.5 Initialization/Capture Register

The 32-bit QEIx Initialization/Capture register (QEIXIC) is a general purpose register that can be used to perform the following functions:

- Initialize the Position Counter
- Capture the contents of the Position Counter

The QEIXIC register can perform only one of these tasks at a time, but the mode of operation can be changed during the operation. The selection is done by the PIMOD<2:0> bits of the QEIX Control register (QEIXCON<12:10>). To initialize the Position Counter mode, the contents of the QEIXIC register are loaded into the POSxCNT register, based on the condition set by the PIMOD<2:0> bits.


In Capture mode, the input signal is used to capture the contents of the position register into the QEIXIC register. When used for position capture, an Index match event (QCAPEN = 1) or a Home event (HCAPEN = 1) can cause the QEIXIC register to take a copy of the current Position Counter contents.

3.6 Position Comparator

The 32-bit Compare registers (QEIXGEC and QEIXLEC) and associated comparator allow the user application to compare the contents of the Position Counter to a specified value. The QEIXGEC and QEIXLEC registers can be configured to define bounds of travel beyond which a Fault is generated. When used in Compare mode, the Compare register values are continually compared to the Position Counter. The comparator provides two outputs: greater than or equal, and less than or equal. When a suitable condition is met, the comparator generates and sets the PCHEQIRQ or PCLEQIRQ bit in the QEIX Status register (QEIXSTAT<13> and QEIXSTAT<11>, respectively). If the interrupt enable bit, PCHEQIEN or PCLEQIEN, is set, an interrupt is generated. The comparator output is available on the CNTCMPx pin. The selection of a condition is made by the OUTFNC<1:0> bits of the QEIX I/O Control register (QEIXIOC<10:9>). The comparator can also be used to reset the Position Counter when a match is detected. The selection is made by the PIMOD<2:0> bits of the QEIX Control register (QEIXCON<12:10>). [Figure 3-6](#) illustrates the Index Reset Position Counter operation.

Quadrature Encoder Interface (QEI)

Figure 3-6: Index Reset Position Counter Operation

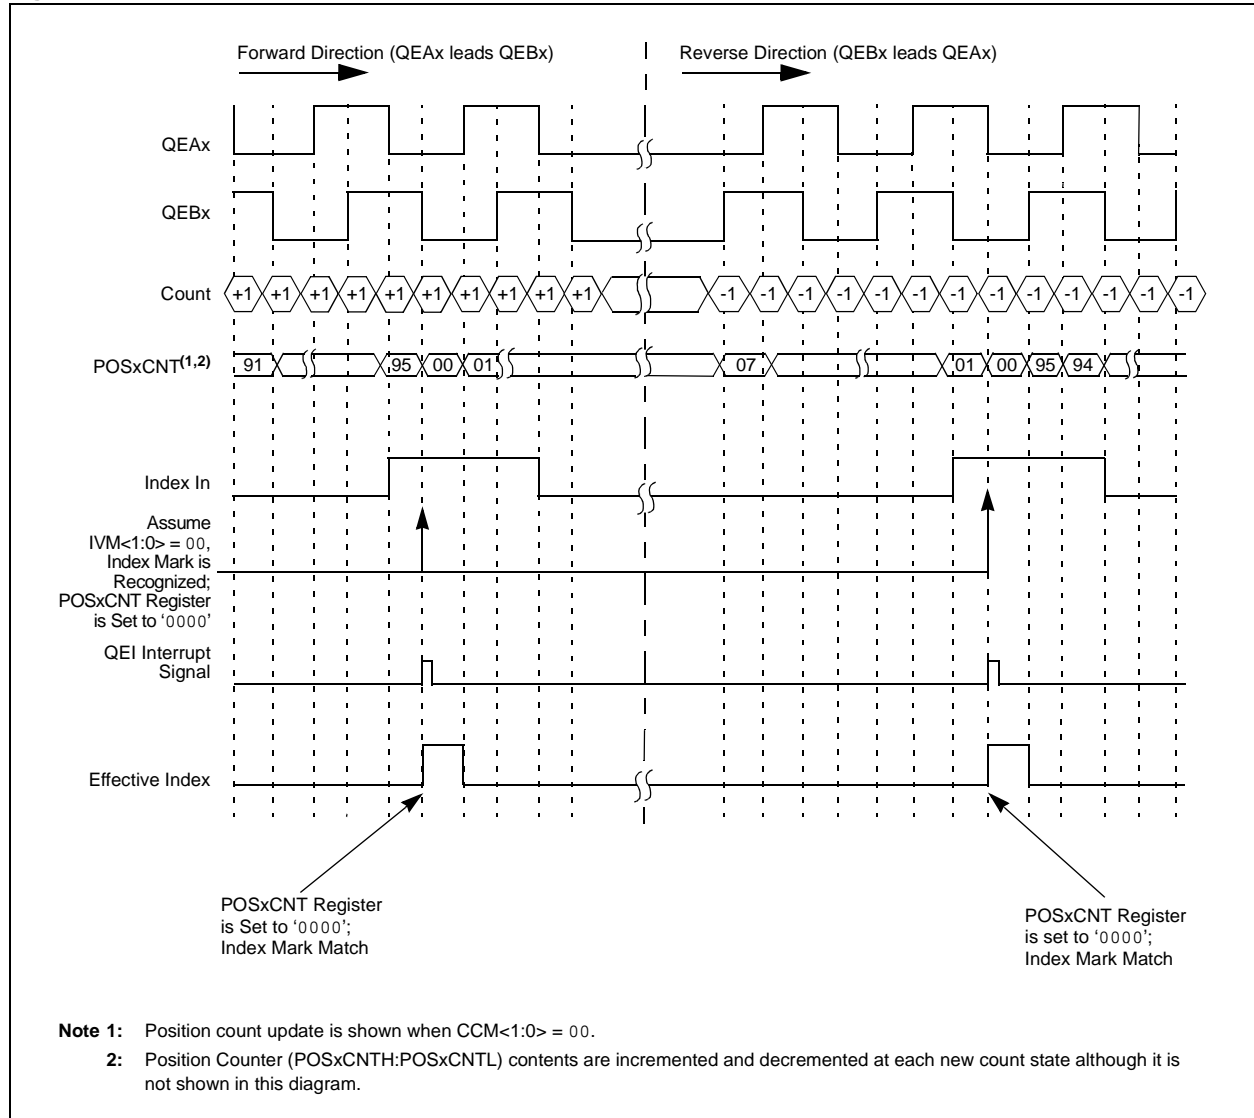

3.7 Index Event

The IMV<1:0> bits in the QEI Control register (QEICON<9:8>) specify the state of the QEAx and QEBx input signals required to Acknowledge an Index event. An Index event is accepted when an Index pulse occurs while the value of the QEAx and QEBx inputs match the condition set in the IMV<1:0> bits. This prevents further Index events from being accepted until the Index input signal is deasserted, and ensures that only one Index event occurs for each Index input pulse. [Figure 3-6](#) illustrates the Index Reset Position Counter operation.

3.8 Position Counter Initialization Modes

By using the PIMOD<2:0> bits in the QEIx Control register (QEIXCON<12:10>), the user application can specify how the Position Counter is initialized during the module operation.

- **Mode 0** – The Position Counter is unaffected by the Index input.
- **Mode 1** – The Position Counter is cleared whenever an Index input event is detected.
- **Mode 2** – The Position Counter is initialized with the contents of the QEIXIC register on the next detected Index input event. When the Index event occurs, the PIMOD<2:0> bits are cleared and then the counter operates in Mode 0.
- **Mode 3** – The Position Counter is initialized with the contents of the QEIXIC register on the next detected Index input event following the assertion of the Home input. When an Index event occurs following the Home event, the PIMOD<2:0> bits are cleared and then the counter operates in Mode 0.
- **Mode 4** – The Position Counter is initialized with the contents of the QEIXIC register on the second detected Index input event following the assertion of the Home input. When the second Index event occurs following the Home event, the PIMOD<2:0> bits are cleared and then the counter operates in Mode 0.
- **Mode 5** – The Position Counter is cleared when the Position Counter value equals the QEIXIC register value.
- **Mode 6** – The Position Counter is loaded with the contents of the QEIXLEC register when the Position Counter value equals the QEIXGEC register value and a count up pulse is detected. The counter is loaded with the contents of the QEIXGEC register when the Position Counter value equals the QEIXLEC register value and a count down pulse is detected.
- **Mode 7** – Modulo Count mode with Index pulse clearing. The Position Counter is loaded with the contents of the QEIXLEC register when the Position Counter equals the QEIXIC register's contents and a count up pulse is detected. The Position Counter is loaded with the contents of the QEIXIC register when the Position Counter equals the QEIXLEC register contents and a count down pulse is detected. If an Index pulse is detected, the Position Counter is cleared whenever an Index input event is detected.

Note: Mode 7 is not implemented on all devices. Refer to the device-specific data sheet for availability. If not implemented, the selection is reserved.

Quadrature Encoder Interface (QEI)

3.9 Digital Input Filter

The QEI module uses digital noise filters to reject noise on the incoming Index and quadrature phase signals. These filters reject low-level noise and large, short duration noise spikes that typically occur in motor systems.


The filtered output signals can change only after an input level has the same value for three consecutive rising clock edges. The result is that short noise spikes between rising clock edges are ignored and pulses shorter than two clock periods are rejected.

The filter clock's rate determines the low passband of the filter. A slower filter clock results in a passband rejecting lower frequencies.

The digital filter is enabled by setting the FLTREN bit in the QEIx I/O Control register (QEIXIOC<14>). The QFDIV<2:0> bits in the QEIx I/O Control register (QEIXIOC<13:11>) select the filter clock divider ratio for the clock signal.

Figure 3-7 illustrates the simplified block diagram of the digital noise filter.

Figure 3-7: Block Diagram of Digital Noise Filter

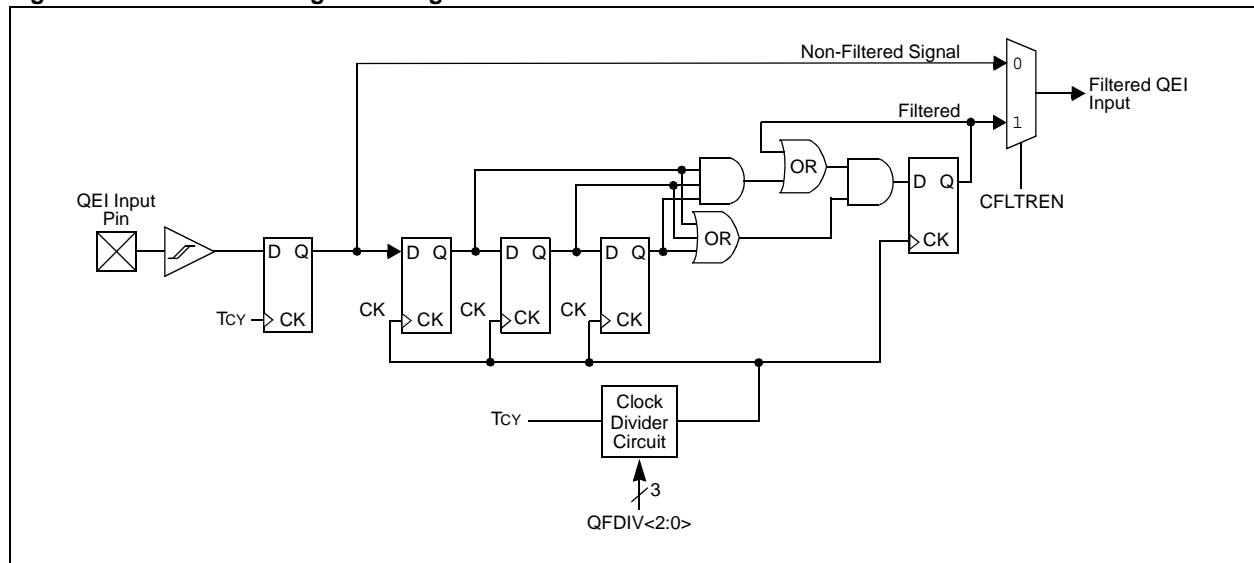

3.10 Interrupts

The following are the sources of QEI interrupts:

- Position Counter overflow or underflow event
- Velocity Counter overflow or underflow event
- Position Counter initialization process complete
- Position Counter greater than or equal compare interrupt
- Position Counter less than or equal compare interrupt
- Index event interrupt
- Home event interrupt

The QEIX Status register (QEIXSTAT) contains the individual interrupt enable bits and the corresponding interrupt status bits for each interrupt source. A status bit indicates that an interrupt request has occurred. The module reduces all of the QEI interrupts to a single interrupt signal to the interrupt controller module.

4.0 QEI OPERATION IN POWER-SAVING MODES

4.1 Sleep Mode

When the device enters Sleep mode, QEI operations cease. The POSxCNT register stops at the current value. The QEI does not respond to active signals on the QEAx, QEBx or INDXx pins. The QEIXCON register remains unchanged.

4.2 Idle Mode

When the device enters Idle mode, the QEISIDL bit in the QEIX Control register (QEIXCON<13>) determines whether the QEI module stops in Idle mode or continues to operate in Idle mode.

If QEISIDL = 1, the QEI module enters into a power-saving mode and performs the same functions as in Sleep mode. If QEISIDL = 0, the module does not enter into a power-saving mode and continues operation in Idle mode.

4.3 Doze Mode

The QEI operation in Doze mode is similar to the normal mode.

5.0 EFFECTS OF A RESET

A Reset forces module registers into their initial Reset state.

Quadrature Encoder Interface (QEI)

6.0 DESIGN TIPS

Question 1: *How do I configure the software when hardware signals are interchanged?*

Answer: The HOMPOL, IDXPOL, QEBPOL and QEAPOL bits in the QEIXIOC register allow the user application to invert the polarity of their associated input signals. The SWPAB bit in the QEIXIOC, when set, swaps the QEAX and QEBX signals prior to their input into the quadrature decoder. Swapping of the signals reverses the direction of count. The OUTFNC<1:0> bits in the QEIXIOC register (QEIXIOC<10:9>) allow the user application to output the internal module state or the status of the Position Counter comparator on a device pin. The output timing is non-critical because the selected signal is used by the customer's application circuit, which is external to the device.

Question 2: *How do I debug the software using the QEI module?*

Answer: The QEIXIOC register can be used to configure the external inputs and outputs of the QEI module.

When setting up or troubleshooting a motion control-based application, the HOME, INDEX, QEB and QEA status bits in the QEIXIOC register can be used to monitor the individual state of their associated inputs.

A sensor or signal can be connected to the Home input by setting the QCAPEN bit in the QEIX I/O Control register (QEIXIOC<15>). When set, it allows the user application to capture the current Position Counter value and save it in the QEIXIC register. If the filter is enabled, the Home event is detected when a rising edge of the filtered Home signal occurs. When a Home event occurs, an interrupt generation can be enabled by setting the HOMIEN bit in the QEIX Status register (QEIXSTAT<2>).

dsPIC33/PIC24 Family Reference Manual

7.0 RELATED APPLICATION NOTES

This section lists application notes that are related to this section of the manual. These application notes may not be written specifically for the dsPIC33/PIC24 device families, but the concepts are pertinent and could be used with modification and possible limitations. The current application notes related to the Quadrature Encoder Interface (QEI) module are:

Title	Application Note #
Servo Control of a DC-Brush Motor	AN532
PIC18CXXX/PIC16CXXX DC Servomotor Application	AN696
Using the dsPIC30F for Vector Control of an ACIM	AN908

Note: Please visit the Microchip web site (www.microchip.com) for additional application notes and code examples for the dsPIC33/PIC24 family of devices.

Quadrature Encoder Interface (QEI)

8.0 REVISION HISTORY

Revision A (June 2009)

This is the initial released version of this document.

Revision B (May 2010)

This version of the document includes the following updates:

- The document has been renamed from dsPIC33E Family Reference Manual to dsPIC33E/PIC24E Family Reference Manual
- Updated the QEIXCON: QEI Control Register ([Register 2-1](#)):
 - Renamed the register from QEICON to QEIXCON
 - Updated the PIMOD<12:10> = 111 definition
 - Changed the bit value definitions of CCM<1:0>
- Updated the QEIXIOC: QEI I/O Control Register ([Register 2-2](#)):
 - Renamed the register from QEIIOC to QEIXIOC
 - Updated the QCAPEN<15> = 0 definition
 - Changed the bit value definitions of OUTFNC<10:9>
 - Changed the bit value definitions of SWPAB<8>
 - Updated the bit name of QFDIV<13:11>, HOMPOL<7>, IDXPOL<6>, QEBPOL<5> and QEAPOL<4>
 - Updated the bit name and bit value definitions of HOME<3>, INDEX<2>, QEB<1> and QEA<0>
- Updated the QEIXSTAT: QEI Status Register ([Register 2-4](#)):
 - Renamed the register from QEISTAT to QEIXSTAT
 - Updated the bit name and bit value definitions of PCHEQIRQ<13>, PCLEQIRQ<11>, PCIIRQ<7>, HOMIRQ<3> and IDXIRQ<1>
 - Updated the bit name of PCHEQIEN<12>, PCLEQIEN<10> and IDXIEN<0>
 - Changed the bit value definitions of POSOVIRQ<9> and VELOVIRQ<5>
 - Add Note 1 to PCIIRQ<7> bit
- Updated the POSxCNTH: Position Counter High Word Register ([Register 2-6](#)):
 - Renamed the register from POSCNTH to POSxCNTH
 - Changed the bit name of POSCNTH to POSCNT and updated the definition
- Updated the POSxCNTL: Position Counter Low Word Register ([Register 2-5](#)):
 - Renamed the register from POSCNTL to POSxCNTL.
 - Changed the bit name of POSCNTL to POSCNT and updated the definition
- Updated the POSxHLD: Position Counter Hold Register ([Register 2-7](#)):
 - Renamed the register from POSHLDH to POSxHLD
 - Updated the bit definition of POSHLD<15:0>
- Updated the VELxCNT: Velocity Counter Register ([Register 2-8](#)):
 - Renamed the register from VELCNT to VELxCNT
 - Updated the bit name of VELCNT
- Updated the INDXxCNTH: Index Counter High Word Register ([Register 2-16](#)):
 - Renamed the register from IDXCNTH to INDXxCNTH
 - Changed the bit name of IDXCNTH to INDXCNT and updated the bit definition
- Updated the INDXxCNTL: Index Counter Low Word Register ([Register 2-15](#)):
 - Renamed the register from IDXCNTL to INDXxCNTL.
 - Changed the bit name and updated the definition of INDXCNT<15:0>
 - Changed the bit name of IDXCNTL to INDXCNT and updated the bit definition
- Updated the INDXxHLD: Index Counter Hold Register ([Register 2-17](#)):
 - Renamed the register from IDXHLDH to INDXxHLD
 - Changed the bit name of IDXHLDH to INDXxHLD and updated the bit definition

dsPIC33/PIC24 Family Reference Manual

Revision B (May 2010) (Continued)

- Updated the QEIXICH: Initialization/Capture High Word Register ([Register 2-19](#)):
 - Renamed the register from ICCH to QEIXICH
 - Changed the bit name of ICCH to QEIIC and updated the bit definition
- Updated the QEIXICL: Initialization/Capture Low Word Register ([Register 2-18](#)):
 - Renamed the register from ICCL to QEIXICL
 - Changed the bit name of ICCL to QEIIC and updated the bit definition
- Added the QEIXLECH: Less Than or Equal Compare High Word Register ([Register 2-21](#))
- Added the QEIXLECL: Less Than or Equal Compare Low Word Register ([Register 2-20](#))
- Added the QEIXGECH: Greater Than or Equal Compare High Word Register ([Register 2-23](#))
- Added the QEIXGECL: Greater Than or Equal Compare Low Word Register ([Register 2-22](#))
- Updated the INTxTMRH: Interval Timer High Word Register ([Register 2-12](#)):
 - Renamed the register from INTTMRH to INTxTMRH
 - Changed the bit name of INTTMRH to INTTMR
- Updated the INTxTMRL: Interval Timer Low Word Register ([Register 2-11](#)):
 - Renamed the register from INTTMRL to INTxTMRL
 - Changed the bit name of INTTMRL to INTTMR
- Updated the INTxHLDH: Interval Timer Hold High Word Register ([Register 2-14](#)):
 - Renamed the register from INTHLDH to INTxHLDH
 - Changed the bit name of INTHLDH to INTHLD
- Updated the INTxHLDL: Interval Timer Hold Low Word Register ([Register 2-13](#)):
 - Renamed the register from INTHLDL to INTxHLDL
 - Changed the bit name of INTHLDL to INTHLD
- Deleted the CMLPH: Compare Register High Word and CMLL: Compare Register Low Word registers
- All new register names and acronyms are updated throughout the document
- Updated all the timing diagrams in the document
- Updated the content in [Section 3.7 “Index Event”](#)
- Updated the bulleted list in [Section 3.10 “Interrupts”](#)
- Deleted UPDN pin in [Section 4.1 “Sleep Mode”](#)
- Minor typographical and formatting corrections were made throughout the document

Revision C (February 2018)

- Updated [Section 1.0 “Introduction”](#):
 - Changed 16-bit Velocity Counter to up to 32-bit Velocity Counter
- Updated [Section 3.2 “Velocity Counter”](#):
 - Changed 16-bit wide register to up to 32-bit wide register
 - Added additional information regarding 32-bit Velocity registers
- Updated [Section 3.5 “Initialization/Capture Register”](#):
 - Added additional information for using a position capture
- Updated [Section 3.6 “Position Comparator”](#):
 - Adds additional information for when the interrupt enable bits, PCHEQIEN or PCLEQIEN, are set
- Updated [Section 3.8 “Position Counter Initialization Modes”](#):
 - Updates **Mode 7** information.
- Updated [Table 1-1](#):
 - Changed headings to QEA and QEB
- Updated [Figure 1-2](#):
 - Changed 16-bit Velocity Counter Register to up to 32-bit Velocity Counter Register

Quadrature Encoder Interface (QEI)

Revision C (February 2018) (Continued)

- Updated and moved [Table 2-1](#) to the beginning of [Section 2.0 “Control and Status Register Map”](#).
- Updated [Register 2-1](#), [Register 2-2](#), [Register 2-3](#), [Register 2-4](#)
- Added [Register 2-9](#), [Register 2-10](#)
- Updated Family Reference Manual to the current document template.

dsPIC33/PIC24 Family Reference Manual

NOTES:

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949 ==

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KEELoQ, KEELoQ logo, Kleer, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2009-2018, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-2670-7

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-67-3636

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7289-7561

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820