

HK-6688S Handheld recharging machine

Instructions for Use

Keyboard definition

确定: Confirm selection

电源: Power on/off (long press for two seconds)

▲▼◀ ▶: Menu selection operation

写卡: Data write to card (recharge)

读卡: Read card information (balance)


1-9: Digital input C: Return, clear

1. Power on, power off

Put in the battery, hold the power button for two seconds, and the screen will flash the startup interface and then enter the user login interface.

The handheld device needs to be authorized by the management card for the first time use, **Authorization method: Paste the management card on the sensing area, turn off the handheld device, and then turn it on. When the machine beeps twice the setting successful interface appears, it is done.**

The management card does not need to be read every time the device is powered on. After the management card is authorized, the authorization information is stored in handheld device. If you need to change the authorization information, you can re-authorize with the management card to overwrite it.

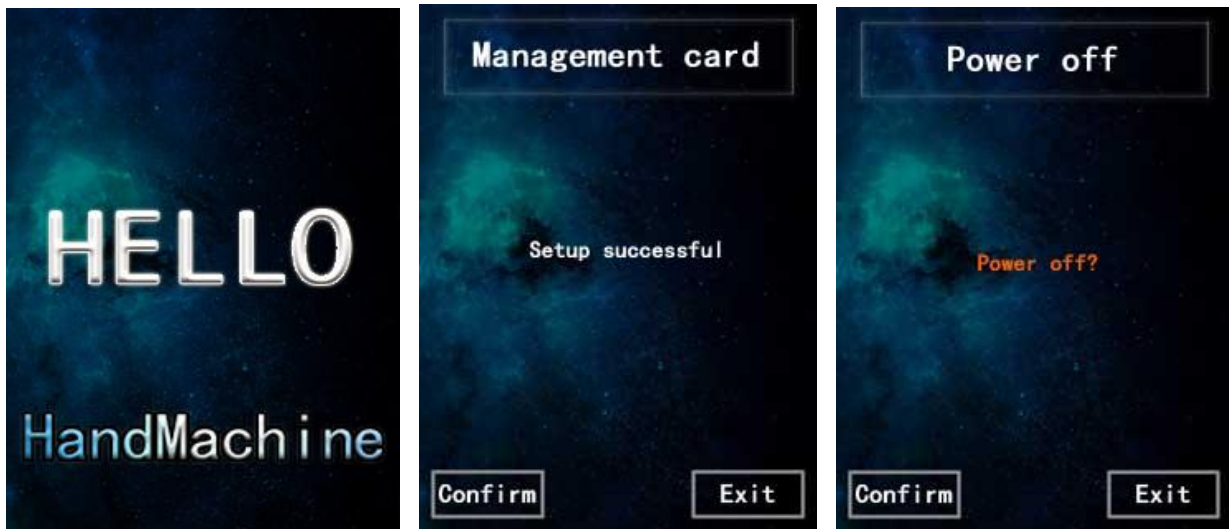

With the device powered on, press and hold the power button for two seconds, the screen will display the shutdown confirmation interface, and press the power button to shut down.

If this device is not used for a long time, please remember to take out the battery to prevent battery leakage from corroding the circuit board. The does not provide warranty for machine damage caused by battery issues.

2、 User login, user permissions

After starting up, enter the user login page, input the correct username and password, and press the “确定” key to enter the main menu

The user password used for login is as follows:

Ordinary user: 001 **password: 123456**

Senior administrator: 007 **password: 123456**

Ordinary users only have basic permissions such as card recharging and rate setting; senior administrators have all permissions, including data clearing and restoring factory settings,. Ordinary customers only need to log in as ordinary users.

3、Card recharge, batch recharge, card clearing

Single card recharge: Place a single user card in the sensing area and enter the recharge amount press the“ 确定” key (If you recharge 500 , you need to enter 500, display the recharge amount: 500 , press the“ 确定” key, the handheld machine makes a "beep" sound, display "Recharge successful" Card amount: 500)

Batch recharge: Just like a single recharge, first enter the amount to be recharged, press “确定” , and then place the user card in the sensing one by one. When the recharge is completed, press the “C” key to exit the batch recharge.

Clear card: If you need a refund, press the “读卡” key first, check the balance in the card, and then enter the clear card interface then put the user card that needs to be cleared in the sensing area, press the“ 确定” key to confirm, and after the "beep" sound, it shows the clearing is successful.



The recharge amount limit for handheld devices is as follows:

Recharge quantity : How many times can this machine be recharged at most,
the default is 1000000 cards;

Maximum amount in card : How much can be stored in the card at most, the
default is 60000

Total recharge amount : The maximum amount of recharge on this machine,
default 100000000



4、Tariff setting

Split-type machine rate: Divided into time mode and flow mode, enter the corresponding mode setting according to the need, first enter the rate amount, then press the "▼", the cursor moves to the next setting unit (rate time or pulse flow), after writing, put the management card in the sensing area, press the confirm key, drip sound, setting successful. Put the set management card on the water control machine that needs to be adjusted, the water control machine is powered off and then on to write (the machine will read the management card at the moment of startup).



Standby time



Default value: 15 seconds

(No operation for 15 seconds, turn off the screen, turn off the machine after 2 minutes of screen off)

Restore to factory settings

Only senior administrators have the authority to perform this operation. After restoring to factory settings, all machine parameters are reset to their default values and the machine is off.

Change password

Enter the password change interface, enter the new password twice, Press to “确定”

001 users can only change 001 password, 007 users can change 001 and 007.



The image displays two side-by-side screenshots of a password change interface. The left screenshot, titled 'Change password', features a blue background with a padlock icon. It lists two options: 'User password' (indicated by a blue person icon) and 'Administrator password' (indicated by a green person icon). At the bottom are 'Confirm' and 'Exit' buttons. The right screenshot, titled 'User password', shows the input fields for the new password. It has two text boxes labeled 'New password' and 'Confirm password'. At the bottom are 'Confirm' and 'Exit' buttons.

Clear data

Recharge machine power off, then power on again, log in with 007, 123456, enter the main menu click on inquiry, Press the keyboard“ 写卡” Clear data