

# ROTARY SWITCH



## SR26 Series

### Application

- ✓ TV/Video, Audio, Home appliance, Precision apparatus,  
Automotive, Musical instruments, Industrial control, Others

### Feature

- ✓ Up to 12 positions general use rotary switches with optional plastic shafts.



### ■Specification

Rating	125V AC 0.3A
Withstand Voltage	500V AC - 1 minute
Contact Resistance	50 mΩ Max.
Insulation Resistance	500V DC - 100MΩ Min.
Rotational Torque	0.5 ± 0.2 kgf.cm
Operating Life Cycle	10,000 cycles

### ■How to order

SR2612F – 0102 – 15F5B – D8 – S

[Model](#)

Number of Pole & Position  
Ex. 0102 – 1 pole 2 positions  
0402 – 4 poles 2 positions

[Shaft Type](#)

#### Timing

Order Code	Description
S	Shorting (make-before-break)
N	Non-shorting (break-before-make)


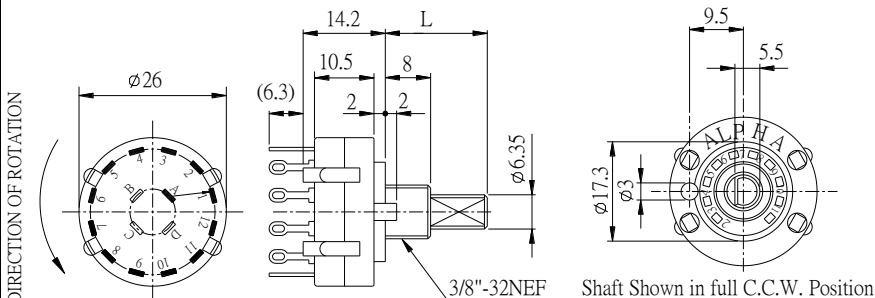

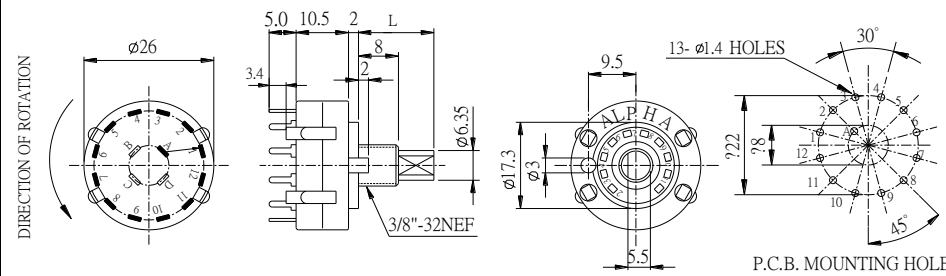

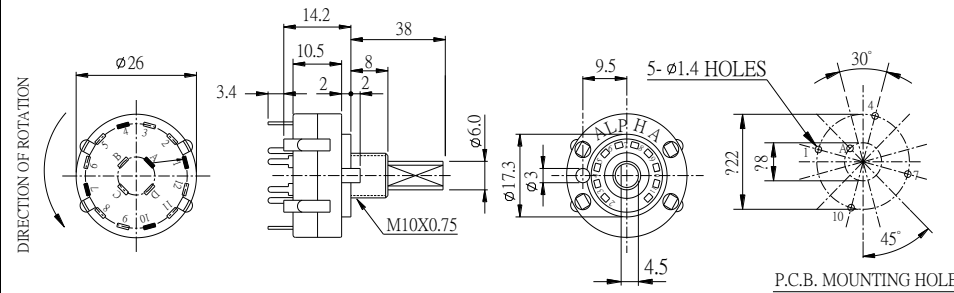
#### Bushing Type

Order Code	Bushing Length	Bushing Diameter
D1	8mm	M10*0.75
D8	8mm	3/8"- 32NEF

## SR26 Series

### Model Description

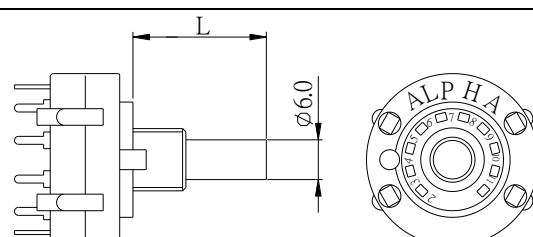
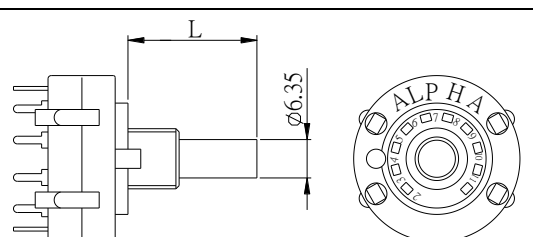
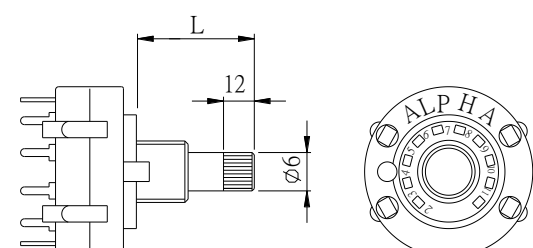
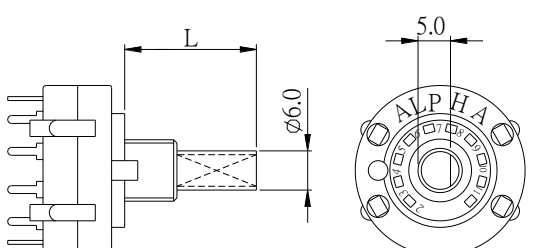
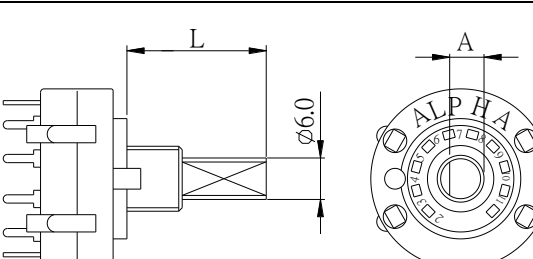
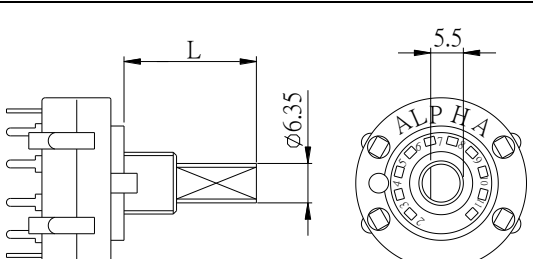
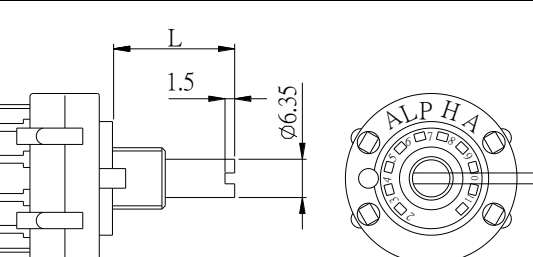
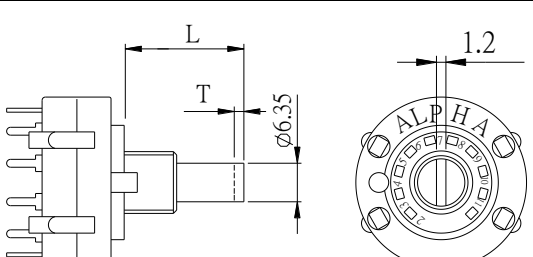
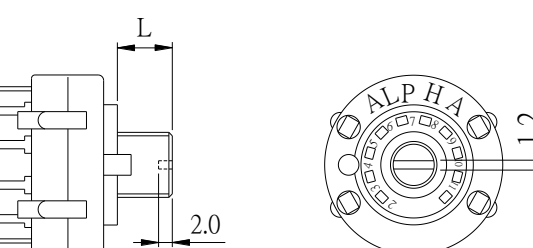
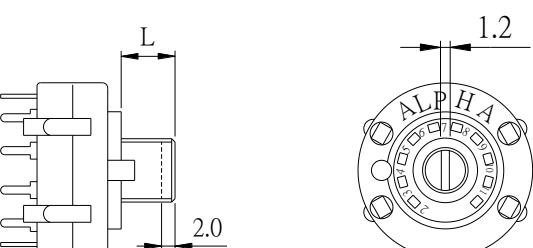
Model	Terminal Type	Pole	Position	Changeover Angle	Timing
<a href="#">SR2611F</a>	Soldering	1	2~12	30°	Shorting/ Non-shorting
		2	2~6		
		3	2~4		
		4	2~3		
<a href="#">SR2612F</a>	PCB	1	2~12	30°	Shorting/ Non-shorting
		2	2~6		
		3	2~4		
		4	2~3		
<a href="#">SR2613F</a>	PCB	1	2~4	90°	

Order Code	Outline Drawing
SR2611F-□□-(L)F5B-D8-S 	
SR2612F-□□-(L)F5B-D8-S 	
SR2613F-□□-(L)F5A-D1-N 	 <p>CHANGEOVER ANGLE=60° IS ALSO AVAILABLE UPON REQUEST</p>

[Back to top](#)

## SR26 Series

### ■ Shaft Type

LR0A			LR0B		
	L			L	
	15			15	
	18			18	
	38			21	
					38
LK0A			LF6A (270°)		
	L			L	
	33.5			20	
LF5A (90°)			LF5B (90°)		
	L	A		L	
	16	4.5		15	
	17	5.0		18	
	20	4.6		21	
		5.0		29	
24	4.6	38			
LS0B			LS5B		
	L			L	T
	14.5			23	1.3
8S0B			8S5B		
	L			L	
	8			8	

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Alpha (Taiwan):

<a href="#"><u>SR2612F-0112-38F5B-D8-S</u></a>	<a href="#"><u>SR2611F-0112-38R0B-D8-N</u></a>	<a href="#"><u>SR2612F-0205-21R0B-D8-N</u></a>	<a href="#"><u>SR2611F-0205-21F5B-D8-N</u></a>
<a href="#"><u>SR2611F-0108-21R0B-D8-S</u></a>	<a href="#"><u>SR2611F-0205-38R0B-D8-N</u></a>	<a href="#"><u>SR2611F-0206-21R0B-D8-S</u></a>	<a href="#"><u>SR2612F-0107-18F5B-D8-S</u></a>
<a href="#"><u>SR2612F-0205-38R0B-D8-S</u></a>	<a href="#"><u>SR2611F-0107-18F5B-D8-N</u></a>	<a href="#"><u>SR2611F-0403-38R0B-D8-N</u></a>	<a href="#"><u>SR2611F-0205-18F5B-D8-N</u></a>
<a href="#"><u>SR2612F-0304-38F5B-D8-S</u></a>	<a href="#"><u>SR2612F-0403-21R0B-D8-N</u></a>	<a href="#"><u>SR2611F-0403-21R0B-D8-S</u></a>	<a href="#"><u>SR2613F-0104-18F5B-D8-N</u></a>
<a href="#"><u>SR2611F-0205-38F5B-D8-N</u></a>	<a href="#"><u>SR2611F-0107-21R0B-D8-S</u></a>	<a href="#"><u>SR2611F-0206-38R0B-D8-N</u></a>	<a href="#"><u>SR2611F-0108-38R0B-D8-N</u></a>
<a href="#"><u>SR2612F-0206-21R0B-D8-N</u></a>	<a href="#"><u>SR2612F-0108-21R0B-D8-N</u></a>	<a href="#"><u>SR2612F-0108-18F5B-D8-S</u></a>	<a href="#"><u>SR2611F-0304-21R0B-D8-S</u></a>
<a href="#"><u>SR2612F-0304-21R0B-D8-N</u></a>	<a href="#"><u>SR2612F-0403-38F5B-D8-S</u></a>	<a href="#"><u>SR2611F-0107-21F5B-D8-N</u></a>	<a href="#"><u>SR2612F-0107-21R0B-D8-N</u></a>
<a href="#"><u>SR2612F-0108-38R0B-D8-S</u></a>	<a href="#"><u>SR2611F-0108-38F5B-D8-N</u></a>	<a href="#"><u>SR2611F-0107-38R0B-D8-N</u></a>	<a href="#"><u>SR2612F-0112-21R0B-D8-N</u></a>
<a href="#"><u>SR2611F-0112-21R0B-D8-S</u></a>	<a href="#"><u>SR2613F-0103-18F5B-D8-N</u></a>	<a href="#"><u>SR2611F-0108-21F5B-D8-N</u></a>	<a href="#"><u>SR2612F-0206-38F5B-D8-S</u></a>
<a href="#"><u>SR2611F-0107-38F5B-D8-N</u></a>	<a href="#"><u>SR2613F-0102-18F5B-D8-N</u></a>	<a href="#"><u>SR2612F-0205-18F5B-D8-S</u></a>	<a href="#"><u>SR2612F-0107-38R0B-D8-S</u></a>
<a href="#"><u>SR2611F-0304-38R0B-D8-N</u></a>	<a href="#"><u>SR2611F-0205-21R0B-D8-S</u></a>	<a href="#"><u>SR2611F-0108-18F5B-D8-N</u></a>	<a href="#"><u>SR2612F-0112-18F5B-D8-N</u></a>