


MPMC EXPERIMENT 3

A) To add two 32-bit (double-precision) numbers using register-indirect and based addressing with SI, DI and BX.

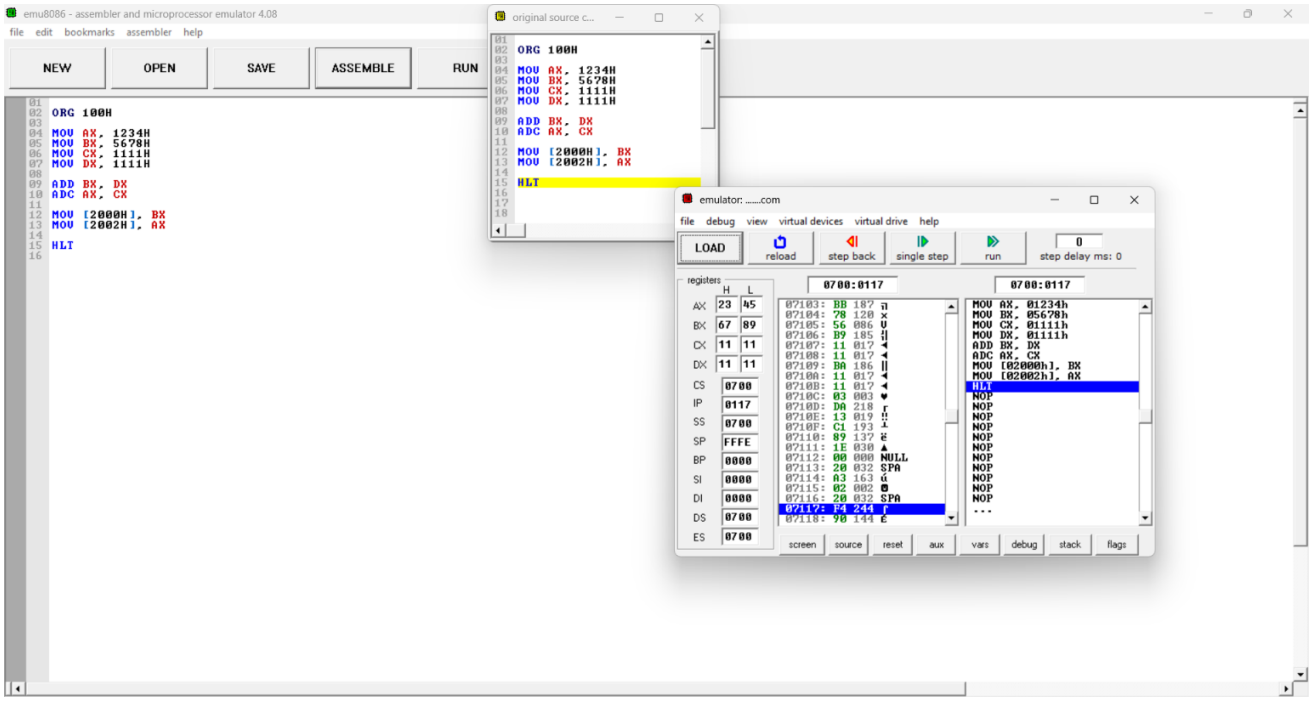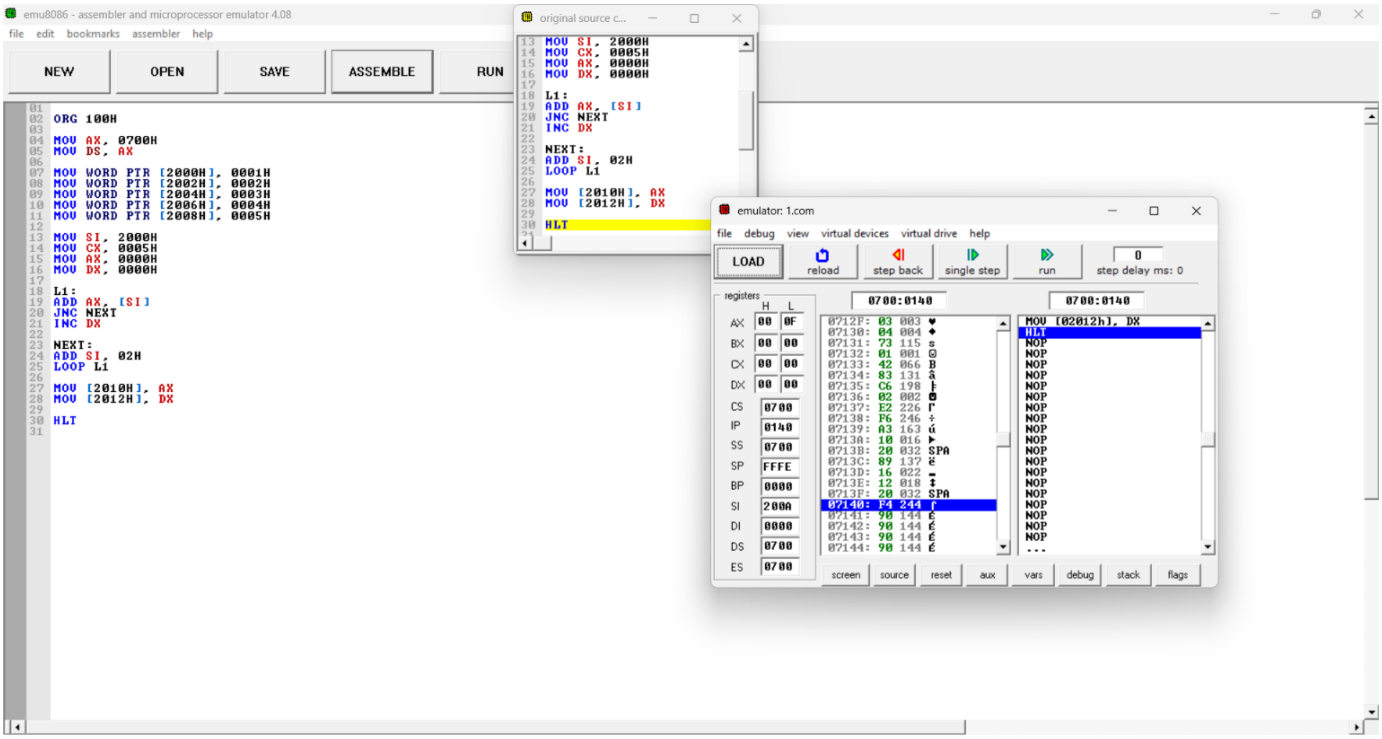

B) To find the sum of N 16-bit numbers stored in a word array with a 32-bit result using a loop.

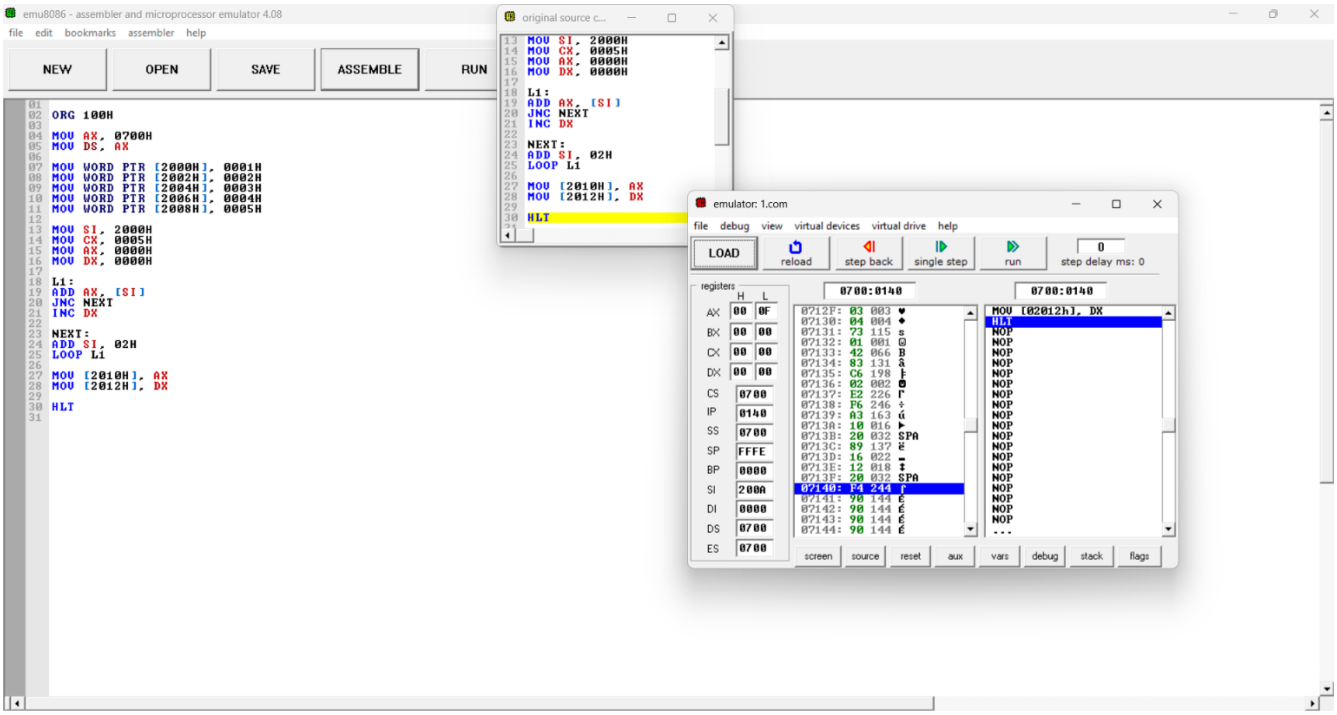


emu8086 - assembler and microprocessor emulator 4.08
file edit bookmarks assembler help
NEW
OPEN
SAVE
ASSEMBLE
RUN
ORG 100H
MOV AX, 0700H
MOV DS, AX
MOV WORD PTR [2000H], 0001H
MOV WORD PTR [2002H], 0002H
MOV WORD PTR [2004H], 0003H
MOV WORD PTR [2006H], 0004H
MOV WORD PTR [2008H], 0005H
MOV SI, 2000H
MOV CX, 0005H
MOV AX, 0000H
MOV DX, 0000H
L1:
ADD AX, [SI]
JNC NEXT
INC DX
NEXT:
ADD SI, 02H
LOOP L1
MOV [2010H], AX
MOV [2012H], DX
HLT
original source c...
emulator: 1.com
file debug view virtual devices virtual drive help
LOAD
reload
step back
single step
run
step delay ms: 0
registers
0700:0140
0700:0140
MOV [02012h], DX
HLT
NOP
screen
source
reset
aux
vars
debug
stack
flags