

Mitigating Multipath Effect for DSSS Positioning – Using Deep Learning

Justin Yang

Problem of Interest and Motivation

- Problem of Interest: Solve the DSSS positioning problem under the conditions of the transmission pulse shaping (such as raised-cosine function) and multipath channels.
- Motivation:
 - DSSS (Direct Sequence Spread Spectrum) is a common technique for measuring the distance between the transmitter and receiver.
 - For the positioning using DSSS, it is reported that reducing the transmission bandwidth will lower the positioning accuracy when multipath channel exists.
 - Traditionally, the rectangular pulse shape is used as the transmission waveform for the sake of the positioning accuracy.
 - However, bandwidth is a precious resource. Thus, it is desired to reduce the bandwidth requirement if possible.
 - This is especially true if we use the radio broadcasting the DSSS waveforms for the indoor or outdoor positioning service.
 - To have the accuracy not limited by the multipath channel and the non-rectangular transmission pulse shaping such as Raised Cosine pulse shaping, it is commonly thought that channel estimation is required.
 - Channel estimation implies that higher computation power is required.
- Proposed Method: Use Deep Learning technique for solving this positioning problem.


Novelty and Contribution

- We propose to use Deep Learning technique, based on the waveform learning, for calculating the positioning bias.
 - To my knowledge, this should be the first work which uses the machine learning technique to solve the DSSS positioning problem under the conditions of the transmission pulse shaping (such as raised-cosine function) and multipath channels.
 - Current results show that around 0.015 chips (1-sigma) can be expected.
 - This means: If WiFi Stations (802.11b) are used as the broadcasting stations for positioning, the positioning accuracy can be within 50 cm (1-sigma), even under the indoor multipath channel.

Multipath Error -- Rectangular Shape

- Peak searching algorithm (such as narrow correlator) won't work well, especially when the 2nd path is stronger than the 1st path.


- Rectangular pulse shape
- Each waveform is associated with their own bias error.
- Waveform learning can solve this bias estimation problem.

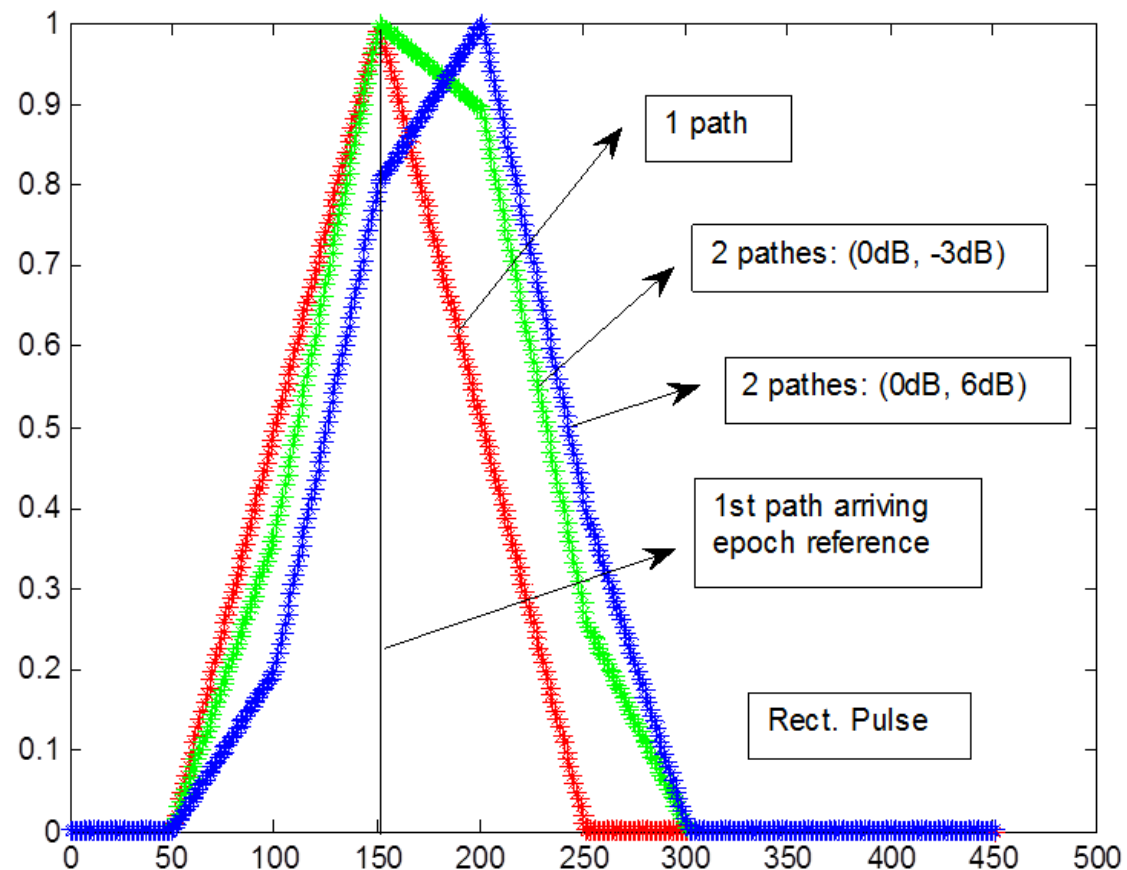

Multipath Error – Raised Cosine

- Case: Raised Cosine with Alpha = 1.0

- Waveforms are more similar, implying that it is more difficult to learn.
- Each waveform is still associated with their own bias error.
- Waveform learning also work based on our simulation results.

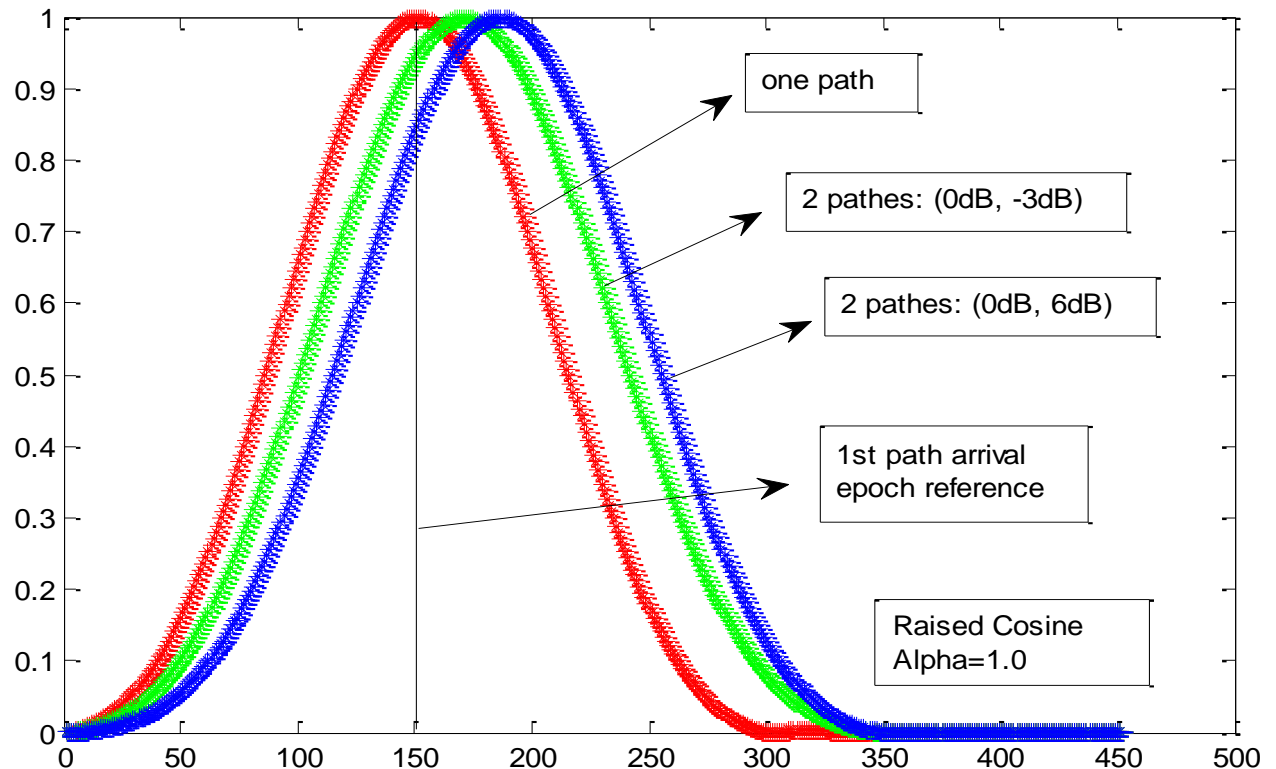



Some Comments from the previous 2 Figures

- Bandwidth versus Positioning Accuracy
 - Traditional scheme NC (Narrow Correlator): Pulse shaping for conserving the BW will enlarge the positioning uncertainty when multipath channel exists.
- Extreme Case -- when the first path is not the one carrying the largest energy:
 - The scheme NC won't work.
- Use DSSS broadcasting for the positioning in the indoor / outdoor environment requires new technique.
 - We propose the waveform learning based on Deep Learning to reduce the positioning uncertainty.

Survey on Techniques of Mitigating Multipath Error

- References can be found at P.14 and P.15.
- Pulse shaping design:
 - Several papers address this problem, especially before launching the GNSS system [1] ~ [3].
- Signal Processing:
 - [10]: compute the channel for the bias estimation.
 - [5]: original paper, in 1992, of using the Narrow correlator (reducing the space between Early and Late) to do the positioning calculation.
 - [6]: The reference [6] provides the survey of the multipath mitigating technique such as D-D (which uses the 2nd derivatives for eliminating the bias caused by multipath).
 - [4]: SVM approach based on the analytic equation to estimate the positioning bias. The analytic equation can only be derived under the assumption of the rectangular pulse without any filtering. The first paper uses the machine learning algorithm to solve this problem.
- Our Approach: Deep Learning Technique based on waveform study.
 - We propose the waveform learning to reduce the positioning uncertainty.

Waveform Based Learning

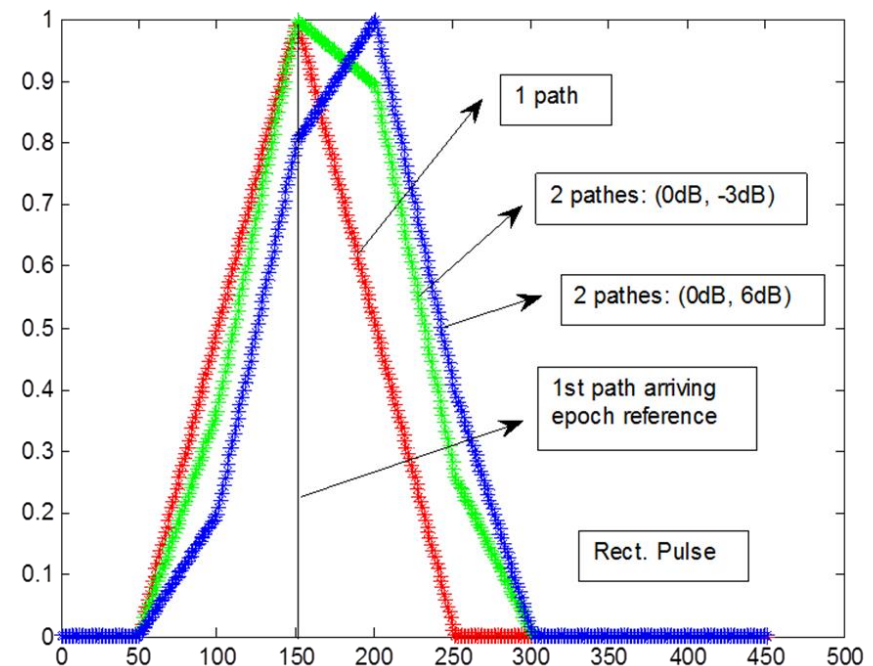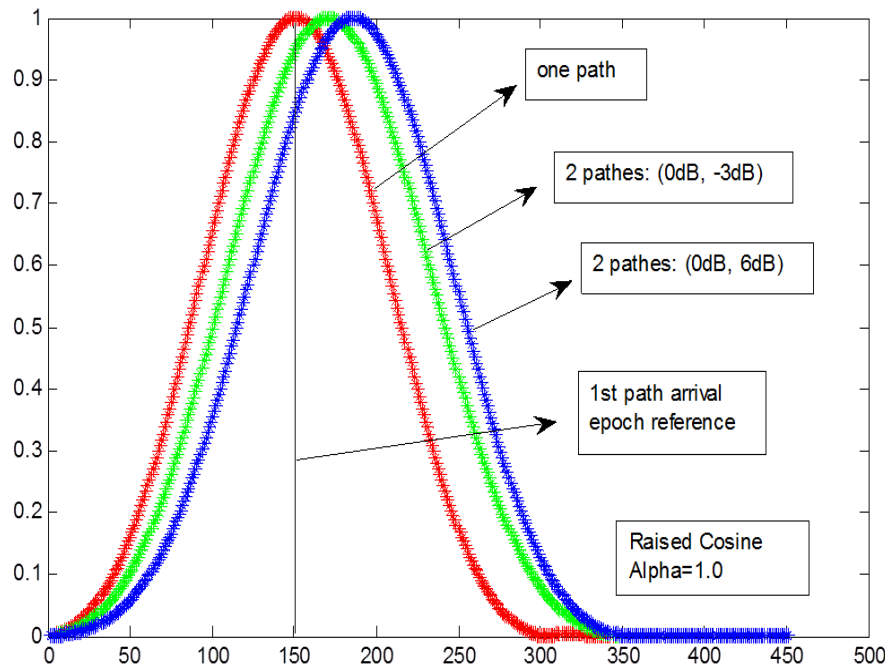


- Will it work?

The answer is YES. But we need to run the simulation to confirm.


YES. We can give the answer without running the simulations.

Proposed Neural Network

- Sample 8 points (around the peak) of the de-spreaded signal as input of the Deep Neural Network (normalized to the peak).
- Output: estimated error bias (in terms of chip).
- Loss function : mean square error
- Learning rate = 0.2

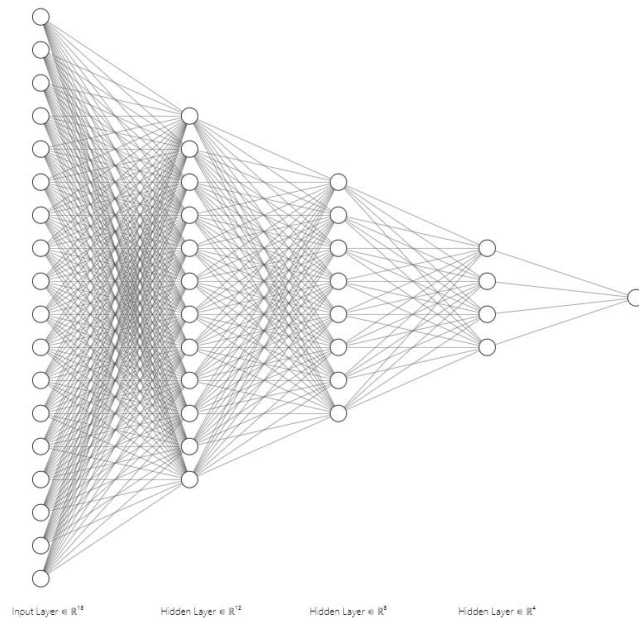



Model: 18-12-8-4-1

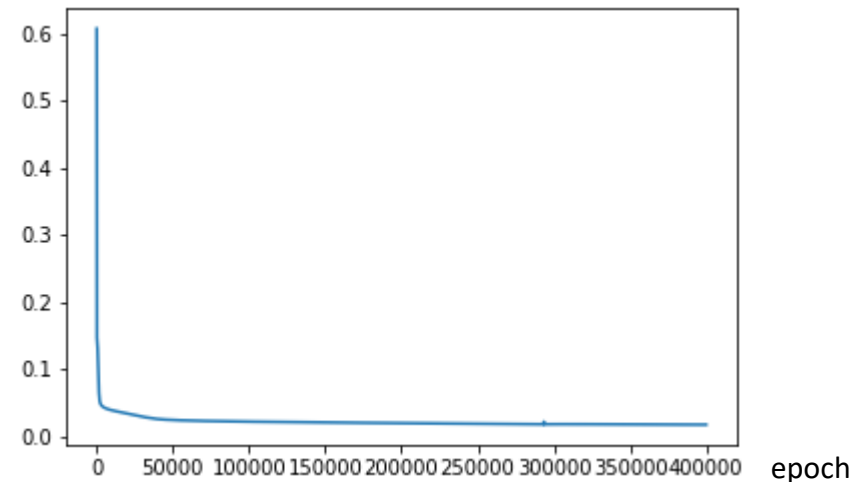

Learning Curve



Simulation Results (1)

- Rectangular-Pulse + receiver 8MHz LPF

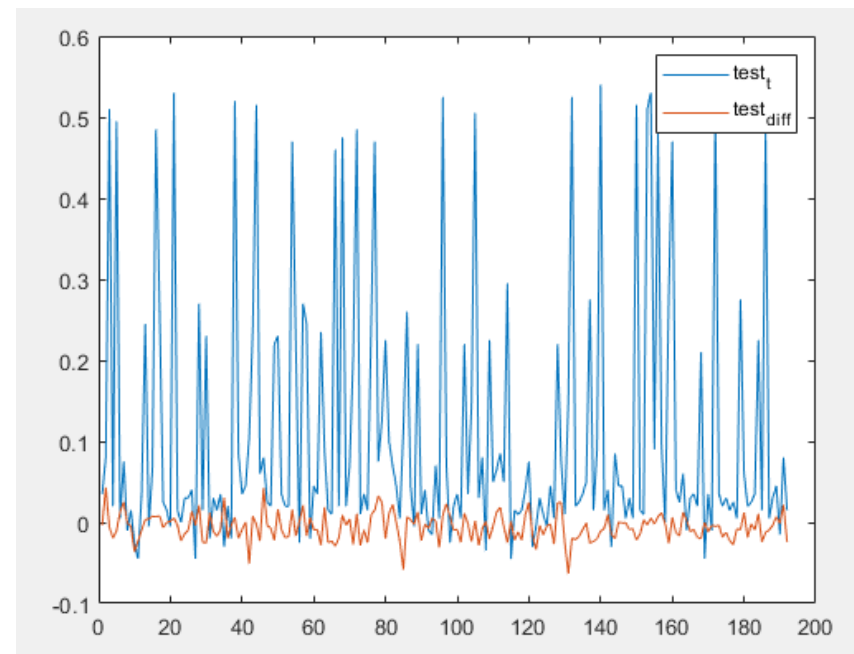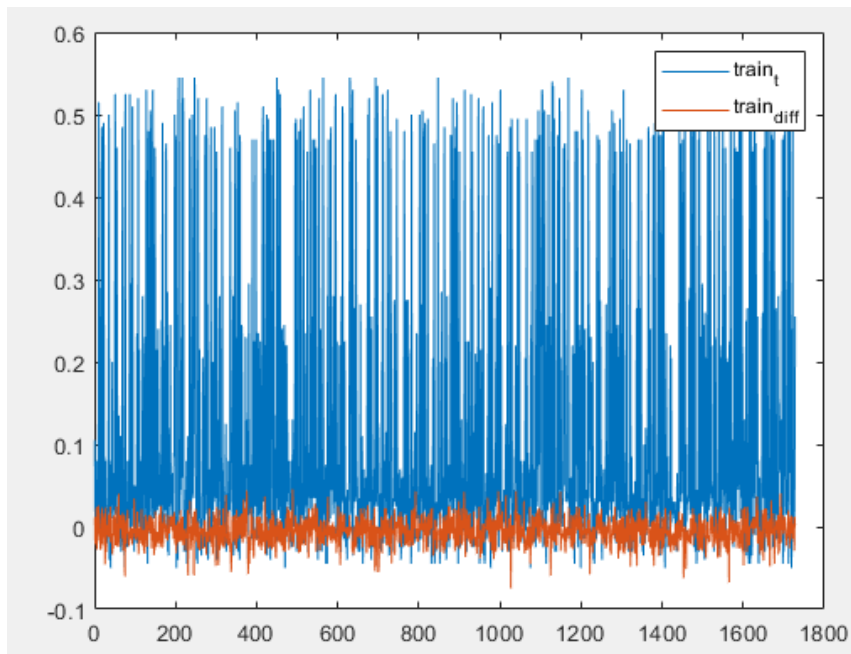

Simulation Results (2)




- Training Error mean = 0.005416995025196702
- Testing Error mean = 0.005860933826381527
- Training MS Error std = 0.016036407205876374
- Test MS Error std = 0.016632837080331097

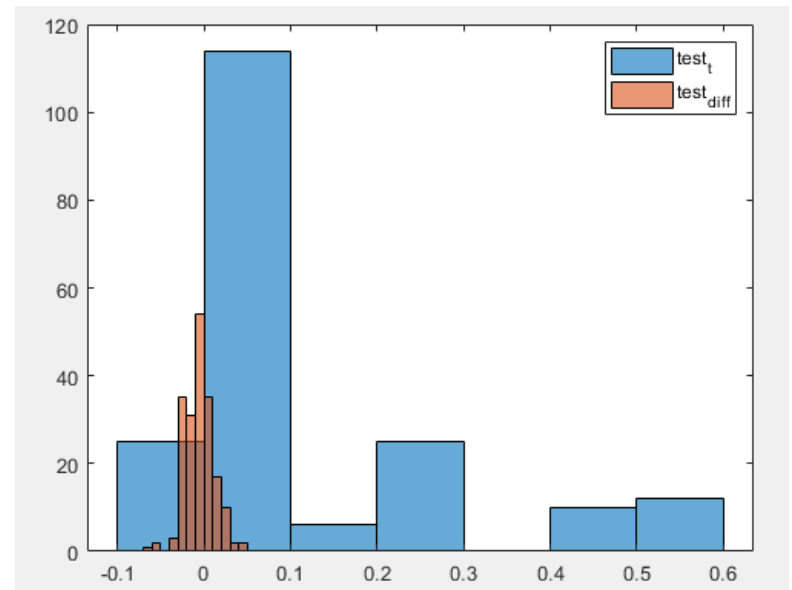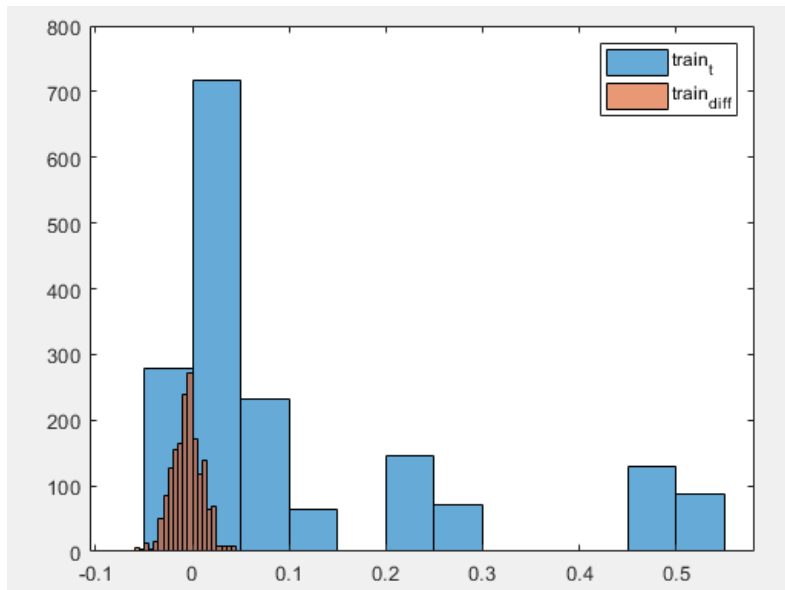

Diff : Residual Error after the compensation of our approach



Simulation Results (3)

- Raised Cosine Pulse Shape

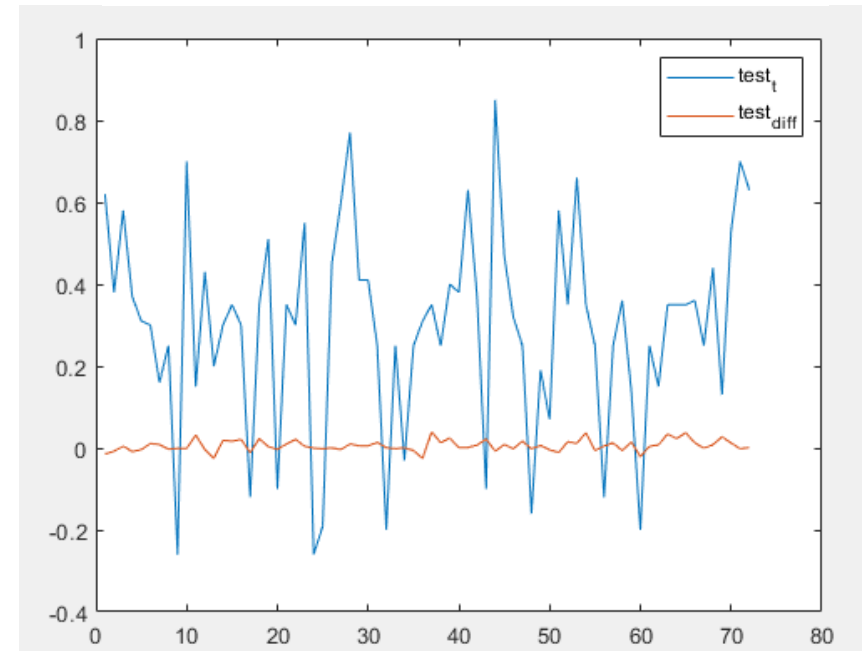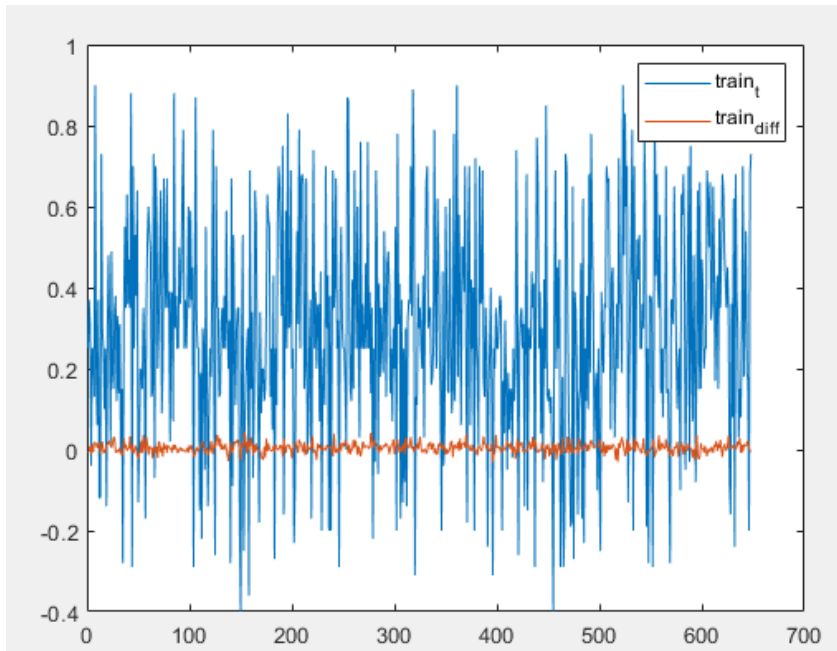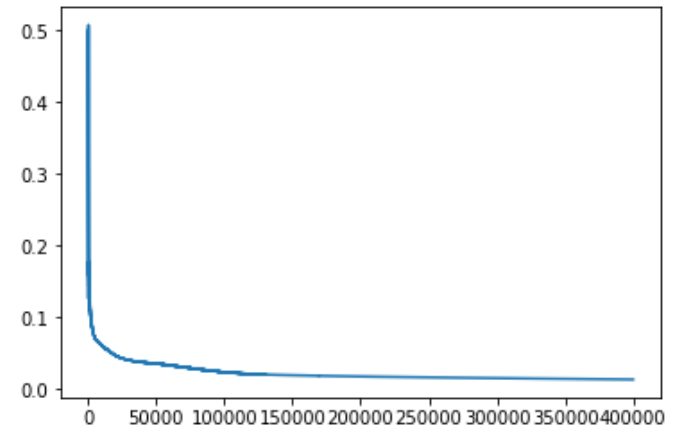

Simulation Results (4)

- Training Error mean = -0.004777672044939124
- Testing Error mean = -0.005929175040308779
- Training MS Error std = 0.012709416500262825
- Test MS Error std = 0.01367870038915605

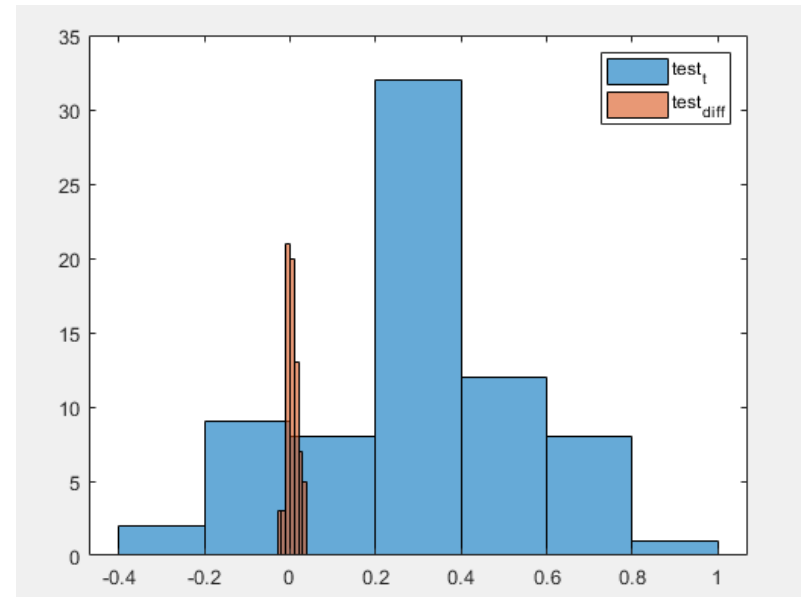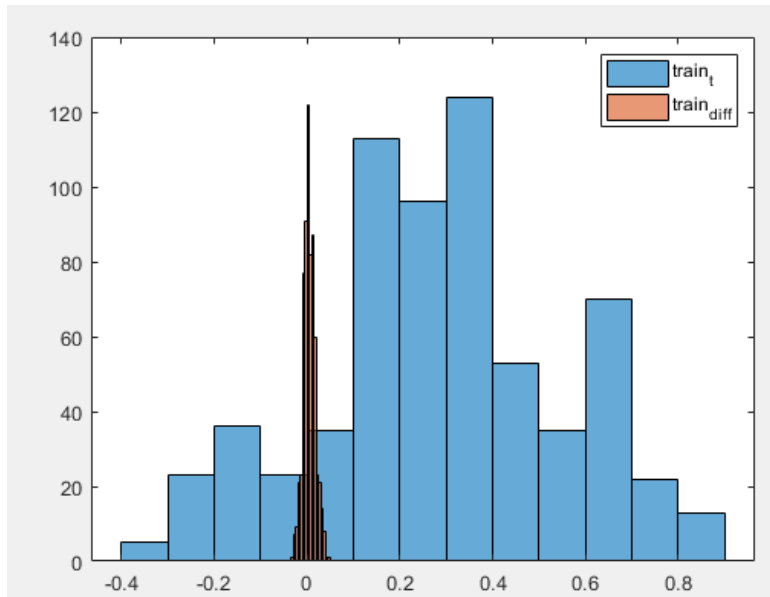

Diff : Residual Error after the compensation of our approach

To Do

- To-Do List:
 - Test the cases of different multipath spacing, under two-path cases;
 - Test the cases of more general channel conditions, i.e., more than 2 paths;
 - Add noise to see the performance curve under different SNR conditions and various multipath channels.

References – Part 1

- [1] J. A. Nossek and Felix Antreich, “On chip pulse shape design for precise synchronization of DS-CDMA systems”, INTERNATIONAL JOURNAL OF CIRCUIT THEORY AND APPLICATIONS Int. J. Circ. Theor. Appl. 2007; 35:565–574.
 - Mainly concern on the design of pulse shaping for the sake of synchronization.
- [2] J. A. Nossek and Felix Antreich, “OPTIMUM CHIP PULSE SHAPE DESIGN FOR TIMING SYNCHRONIZATION”, link: http://www.mirlab.org/conference_papers/International_Conference/ICASSP%202011/pdfs/0003524.pdf
 - Similar to the reference [1].
- [3] Luca Giugno, Marco Luise, “OPTIMUM PULSE SHAPING FOR DELAY ESTIMATION IN SATELLITE POSITIONING”, Invited Paper, link: <http://kilyos.ee.bilkent.edu.tr/~signal/defevent/papers/cr1314.pdf>
 - Use the CRB of the delay as the performance criterion to design pulse shape.
- [4] Quoc-Huy Phan, Su-Lim Tan and Ian McLoughlin, “GPS multipath mitigation: a nonlinear regression approach”, GPS Solutions, July 2013, Volume 17, Issue 3, pp 371–380.
 - Based on the close-form equation of the multipath errors (which is only possible under the rectangular pulse without any receiver filtering), the authors formulate the multipath errors as the parameters estimation problem, and hence the SVM is used for estimating the positioning bias.
- [5] A. J. V. Dierendonck, P. Fenton and T. Ford, “Theory and Performance of Narrow Correlator Spacing in a GPS Receiver”, Navigation: Journal of The Institute of Navigation, Vol. 39, No. 3, Fall 1992.
 - Original paper on using the Narrow Correlator to solve the GPS positioning problem.

References – Part 2


- [6] M. Zahidul, H. Bhuiyan and E. S. Lohan, “Multipath Mitigation Techniques for Satellite-Based Positioning Applications”, Chapter 17, Global Navigation Satellite Systems. Link: <https://www.intechopen.com/books/global-navigation-satellite-systems-signal-theory-and-applications/multipath-mitigation-techniques-for-satellite-based-positioning-applications>
 - This paper offers a survey of the multipath mitigating technique.
- [7] M. Nguyen-H and C. Zhou, “Improving GPS/INS Integration through Neural Networks, Journal of Telecommunications, Vol. 2, Issue 2, May 2010.
 - Neural network approach is used to do the information fusion for calculating the user position.
- [8] J. Soubielle, I. Fijalkow, P. Duvaut and A. Bibaut, “GPS Positioning in a Multipath Environment”, IEEE Transactions on Signal Processing, Vol. 50, No. 1, Jan. 2002
 - This is mainly a performance analysis paper regarding the CRB of GPS errors.
- [9] S. Lohan, Lecture Note 9: Code acquisition and tracking – advanced strategies, positioning oriented, Link: http://www.cs.tut.fi/courses/TLT-5606/Lec9_TLT5606_S.pdf
 - This is a course lecture note offered by S. Lohan.
- [10] C. Sun, H. Zhao, W. Feng and S. Du, “A Frequency-Domain Multipath Parameter Estimation and Mitigation Method for BOC-Modulated GNSS Signals”, [Sensors \(Basel\)](#). 2018 Mar; 18(3): 721. Published online 2018 Feb 28, link: <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5876711/>
 - Estimating the channel parameters for determining the bias.

Appendices

- Baseband equivalent model
- Raised cosine waveform

Baseband Equivalent Model

- **[Ref]** Eq. 2-19 ~ Eq. 2-28 , “Fundamentals of Wireless communications”, by David Tse and Pramod Viswanath, Cambridge University Press, 2005.

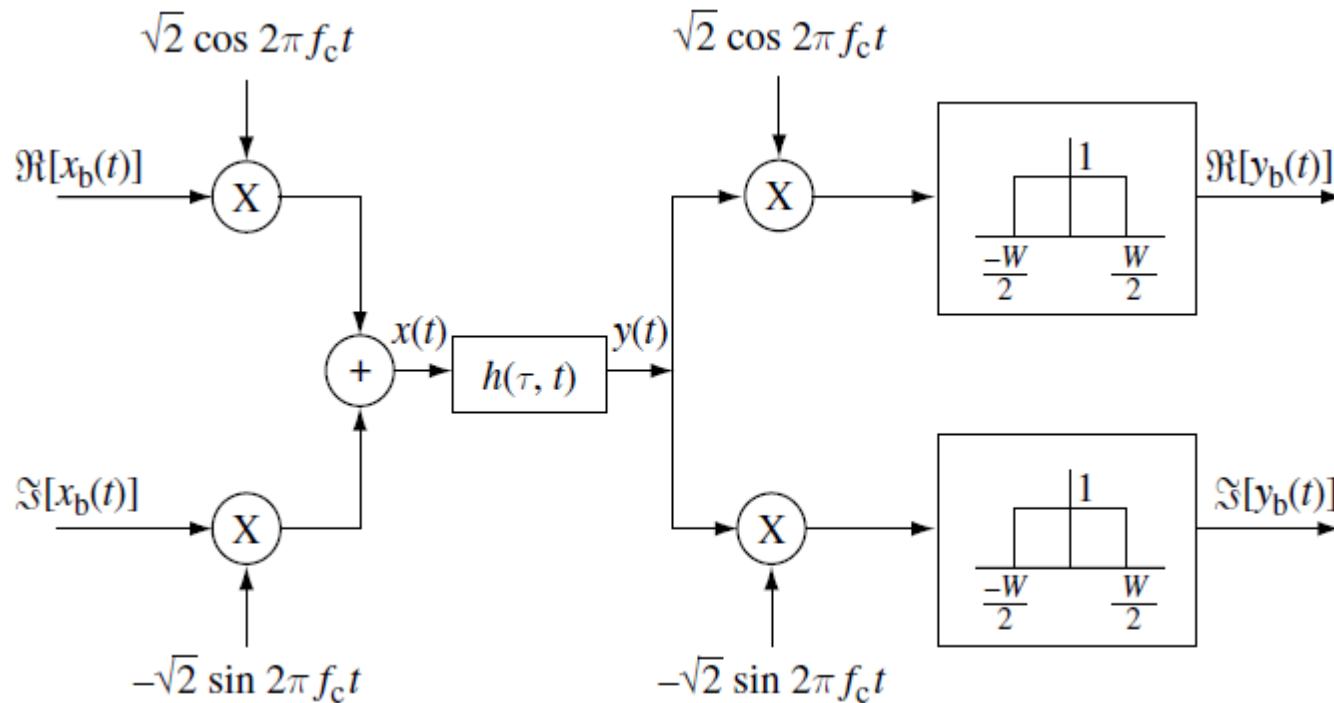

$$y_b(t) = \sum_i a_i^b(t) x_b(t - \tau_i(t)), \quad a_i^b(t) := a_i(t) e^{-j2\pi f_c \tau_i(t)}.$$

Pulse Shaping Function

- [Ref] Wiki: https://en.wikipedia.org/wiki/Raised-cosine_filter

$$h(t) = \begin{cases} \frac{\pi}{4T} \operatorname{sinc}\left(\frac{1}{2\beta}\right), & t = \pm \frac{T}{2\beta} \\ \frac{1}{T} \operatorname{sinc}\left(\frac{t}{T}\right) \frac{\cos\left(\frac{\pi\beta t}{T}\right)}{1 - \left(\frac{2\beta t}{T}\right)^2}, & \text{otherwise} \end{cases}$$

$$\beta = \frac{\Delta f}{\left(\frac{1}{2T}\right)} = \frac{\Delta f}{R_S/2} = 2T\Delta f$$

The **roll-off** factor, β , is a measure of the *excess bandwidth* of the filter,