



A. USB-C 5 V input + single-cell Li-ion charger (MCP73831, ~213 mA with R3 = 4.7k) B. Push-button power latch STM6601 – latch is always powered from VBAT (0.6 uA standby, typ.)

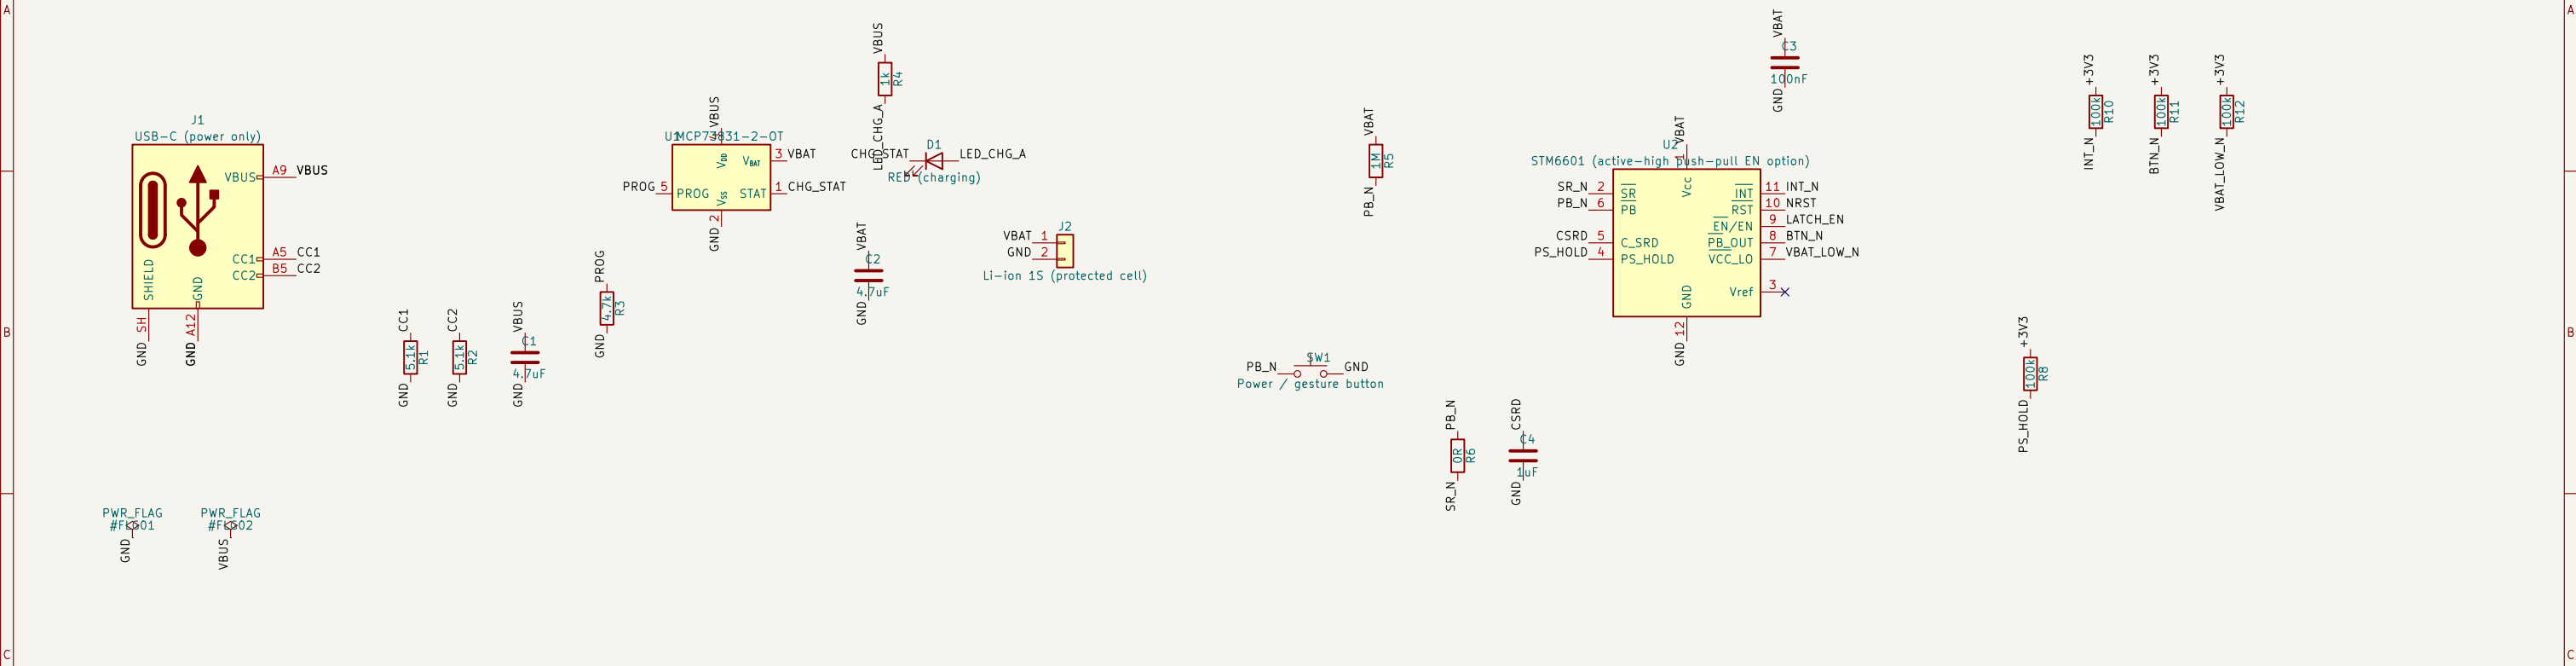

C. 3.3 V LDO (TPS7A05, 1 uA Iq) – ON only while latch EN is high D. STM32L031K6 – gesture decoding, Sleep (Stop), Deep sleep (Standby), full OFF via PS_HOLD

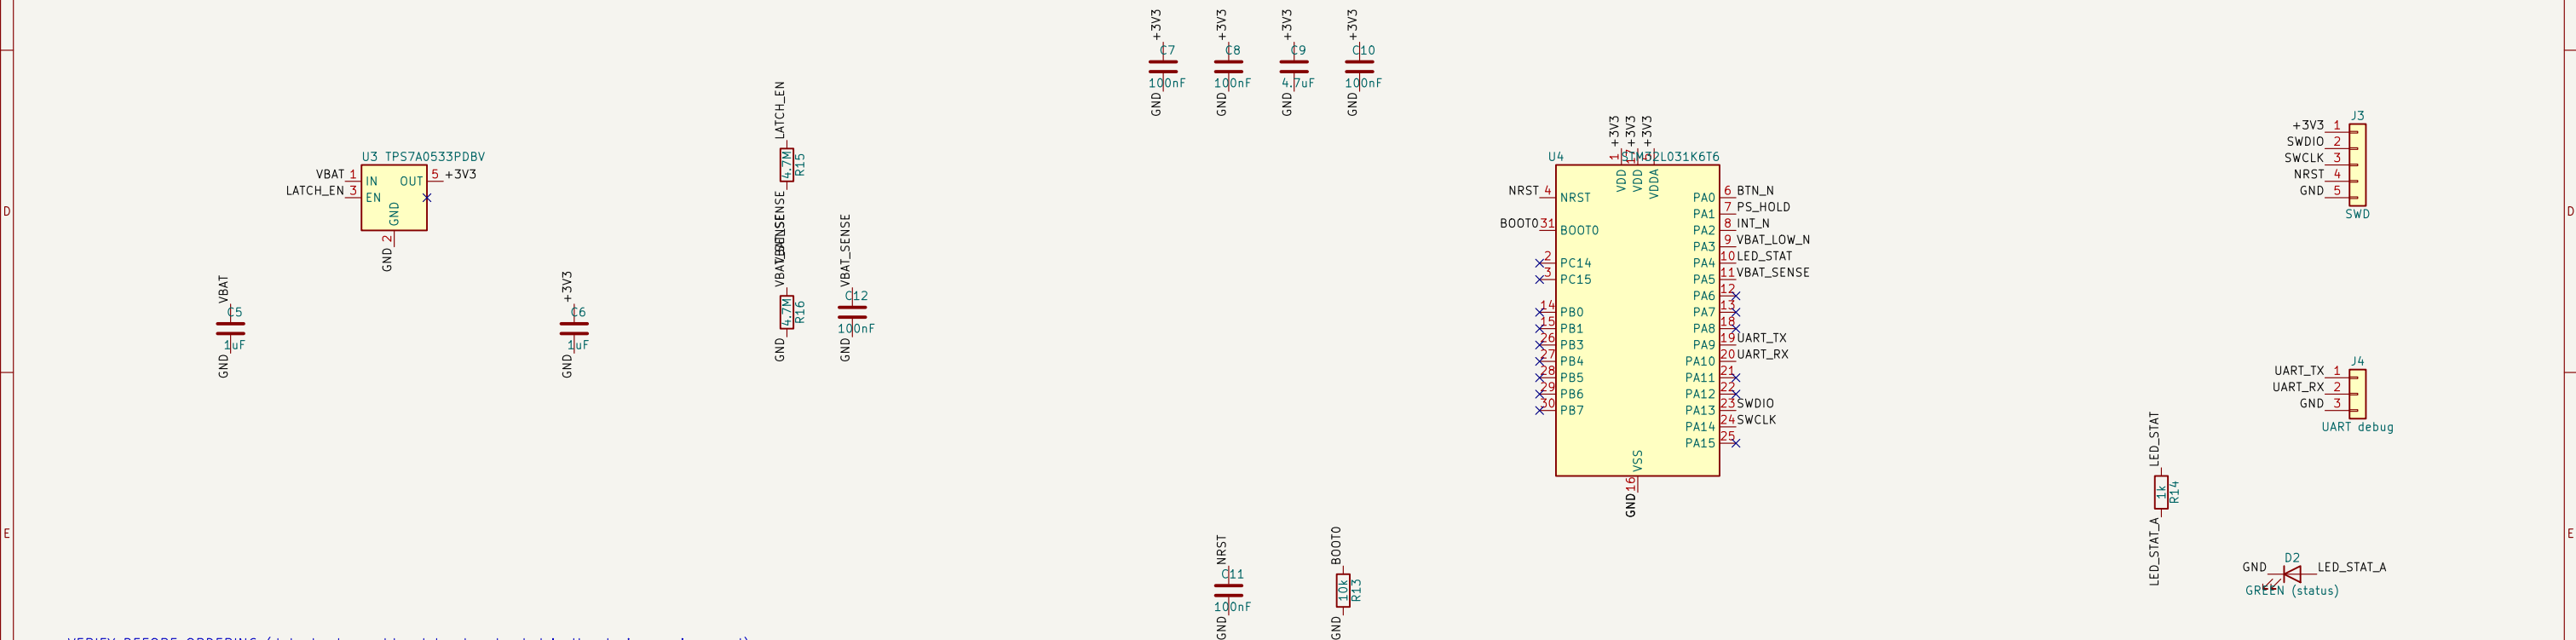

VERIFY BEFORE ORDERING (datasheets could not be downloaded in the design environment):
1) STM6601 ordering code: EN must be ACTIVE-HIGH PUSH-PULL; choose VCC_L0 threshold suited to 1S Li-ion.
2) STM6601 -SR tied to -PB via R6 (single-button Smart Reset ~10 s with C4 = 1uF). Confirm SR semantics; remove R6 + pull SR up if not wanted.
3) STM6601 Vref pin left unconnected – confirm no capacitor is required. 4) STM32L0 WKUP1 edge polarity for Standby wake.
5) Battery must include its own protection PCB (over-discharge / short). 6) Charge current R3 must be <= 1C of the chosen cell.

STM6601 latch, TPS7A05 LDO, MCP73831 charger, STM32L031K6		
Sheet: / File: pushbutton_latch.kicad_sch		
Title: Push-button latch + STM32L0 gesture power controller		
Size: A3	Date: 2026-09-25	Rev: A (draft – verify notes)
KiCad E.D.A. 10.0.6		Id: 1/1