

Beyond Boolean Final Project Report

V-SPACE FPGA Build Challenge 2026

PYNQ-Z2 | Xilinx Zynq-7000 XC7Z020 | All five experiments

Team member	Registration number
Shanshank Pulipati	25BEC0573
Kartik Yadav	25BEC0087

Report contents

Experiment	Combined PDF pages
1 - AES-128 / Beginner	3-8
2 - Radar CA-CFAR / Beginner	9-16
3 - ECG FIR / Intermediate	17-24
4 - Neural-network inference / Intermediate	25-30
5 - BNN safety response / Advanced	31-39

The following experiment reports contain objective, block diagram, RTL design, simulation results, hardware implementation, applications and conclusion. Original engineering results and report dates are preserved.

Current status: 10 October 2026. No new board test, simulation or implementation run is claimed by compiling this report.

Current evidence and submission status

Project	Current status / remaining work
1 - AES	Required technical files and seven report sections assembled. Hardware-result image is a low-resolution original preview; readable completed-ciphertext evidence is still needed. Final video link deliberately blank. Archived routed 125 MHz setup timing fails: WNS -0.104 ns, four failing endpoints.
2 - Radar	All required technical-document categories complete, including native project/IP, routed reports/checkpoint and saved physical verification. Finished narrated demo and accessible Drive URL remain pending; link deliberately blank.
3 - ECG	Required technical documentation/evidence complete, including actual Vivado schematic, board photo and PYNQ notebook/results. Final demo URL recorded; content/public access review pending.
4 - NN inference	Required technical documentation and saved physical/build evidence present. Beyond Boolean identity and final demo URL recorded; content/public access review pending.
5 - BNN response	Required file categories, team identity and replacement final demo URL present. Review the new edit and public access; earlier footage ended in STOP. Original evidence limitations are retained.

Repository-wide notes

All five experiment folders and the combined report are now present. The selected repository is KartikYadav020307/buildx-demo. Its current name differs from the organizer's requested FPGA-Build-Challenge-TeamLeader name format.

This cover and status overview supersedes historical team-name-pending and other-project-not-yet-uploaded notes in earlier individual reports. Each report's technical results, warning review and evidence qualifications continue to apply. File presence is not a score or proof of 100% technical correctness.

Organizer reference: Submission_Guidelines/documents_req.pdf. Detailed current checklist: Final_Report/SUBMISSION_STATUS.md. Final Project 1 video URL remains blank by instruction.

AES-128 Hardware Encryption Accelerator

Experiment 1 - Beginner | V-SPACE FPGA Build Challenge 2026

Team	Beyond Boolean
Members	Shanshank Pulipati - 25BEC0573 Kartik Yadav - 25BEC0087
Platform	PYNQ-Z2 xc7z020clg400-1
Recorded project tool	Vivado 2025.1.1

1. Objective

Implement a 128-bit AES encryption datapath in FPGA programmable logic and demonstrate its behavior using a known-answer test vector. The design uses an iterative round datapath and an on-chip Virtual Input/Output (VIO) core to enter the key/plaintext and observe results over JTAG.

2. Block Diagram

AES-128 hardware architecture

PYNQ-Z2 | iterative AES core with Vivado VIO control

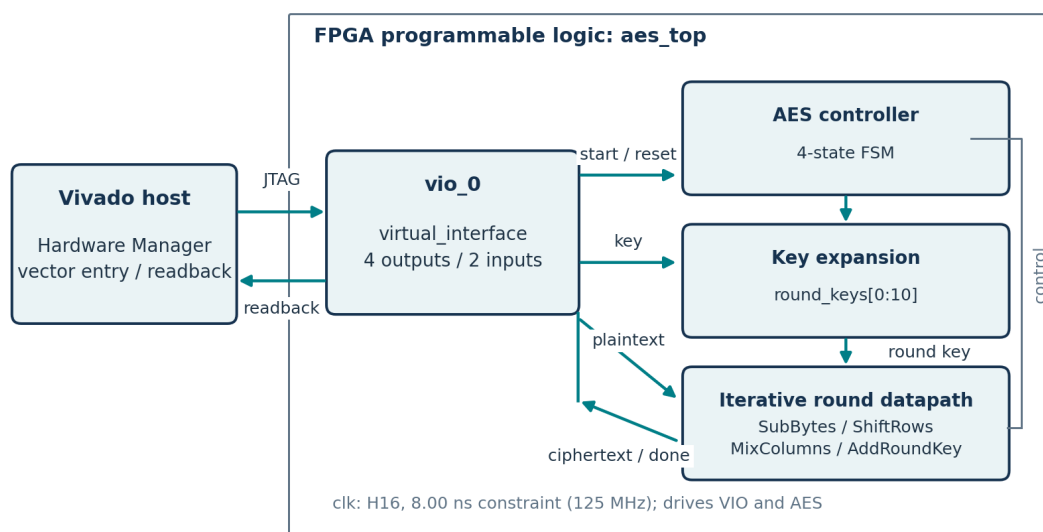


Diagram prepared from the recovered aes_top.v and aes_core.v.

Final AES round bypasses MixColumns. No AXI/PS overlay is present in this archived design.

Architecture drawn from the recovered RTL. The saved top is a pure RTL/VIO design; it contains no AXI DMA or processor-system block design.


3. RTL Design

The design hierarchy contains `aes_top`, the AES submodule `aes_core` and the configured AMD VIO IP `vio_0`. The only external top-level RTL input is `clk`. The original source and IP configuration files are included in RTL; the full generated IP and project dependencies are preserved in the native source archive.

File	Role
<code>aes_top.v</code>	Instantiates <code>virtual_interface</code> (<code>vio_0</code>) and encryption hardware (<code>aes_core</code>); wires the six VIO signals and common clock.
<code>aes_core.v</code>	AES S-box, round constants, key expansion, SubBytes, ShiftRows, MixColumns, AddRoundKey and control state machine.
<code>vio_0.xci</code>	VIO configuration: four output probes and two input probes.
<code>pynq.xdc</code>	Clock input at H16, LVCMOS33; 8.00 ns clock constraint.

Structural RTL schematic: `aes_top`

Exact module instances, port directions and internal wire names from `aes_top.v`

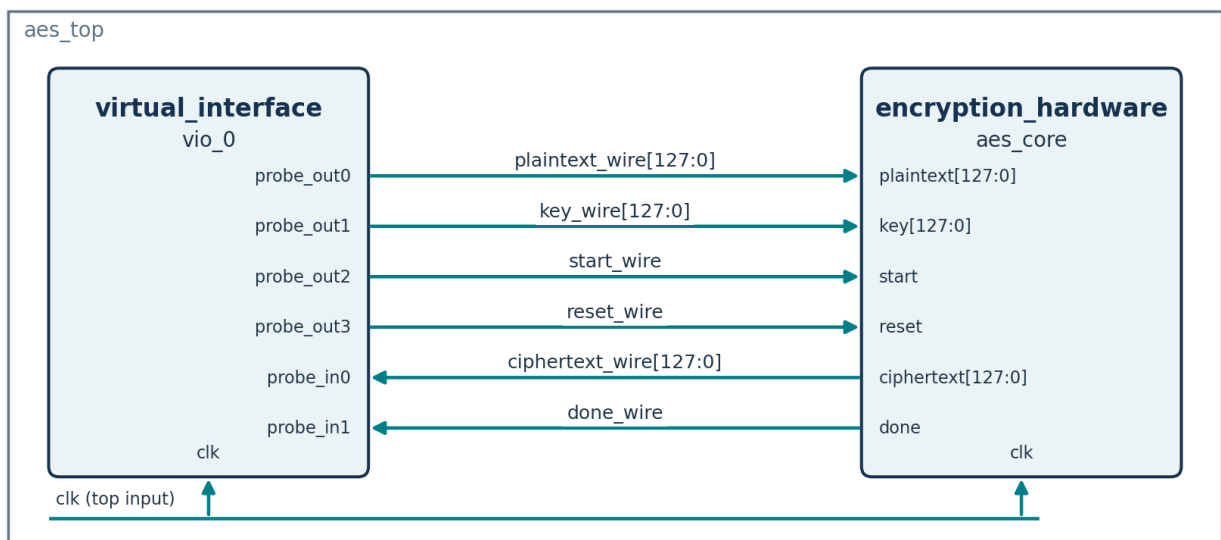

Source-derived structural diagram; this is not a Vivado elaborated or synthesized netlist capture.

All six data/control connections and the common clock are shown. Bus widths: plaintext/key/ciphertext = 128.

Source-derived structural schematic of `aes_top.v`. This diagram documents the RTL wiring; it is not a Vivado netlist screenshot.


FSM state	Operation
<code>S_IDLE</code>	Clear done; on start, store the initial key and plaintext XOR key.
<code>S_KEY_EXP</code>	Compute and store round keys 1 through 10 over successive clocks.
<code>S_ROUNDS</code>	Reuse the round datapath; omit MixColumns in round 10.
<code>S_FINISHED</code>	Register ciphertext, assert done, and return to <code>S_IDLE</code> .

`done` is a one-clock pulse in this RTL: `S_IDLE` clears it on the following clock. The ciphertext register remains available until reset or the next completed encryption.

4. Simulation Results

The preserved behavioral simulation uses tb_aes_core with a 10 ns clock period (100 MHz). The archived transcript reports a passing comparison for the following single known-answer vector:

Signal	Archived hexadecimal value
Key	2b7e151628aed2a6abf7158809cf4f3c
Plaintext	6bc1bee22e409f96e93d7e117393172a
Expected ciphertext	3ad77bb40d7a3660a89ecaf32466ef97
Observed ciphertext	3ad77bb40d7a3660a89ecaf32466ef97

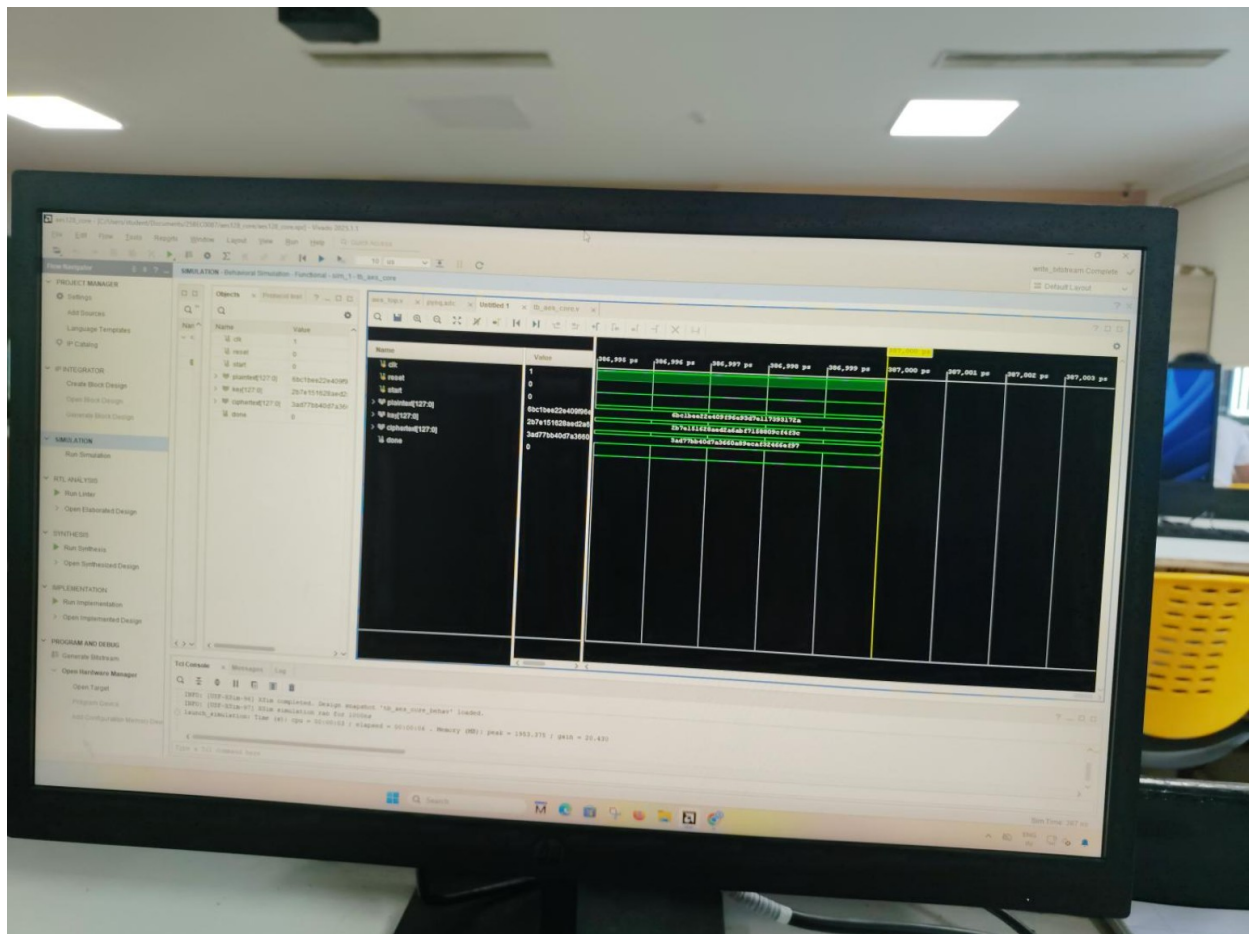


Original supplied simulation photograph. Its time window is tightly zoomed near the end of a historical run; it is not a newly rendered trace. The saved WDB is included for a clearer full-transaction capture.

Saved console status: >> **TEST PASSED** <<. The original transcript ends at 387 ns. Only one vector is preserved; this result does not establish a complete AES regression or implementation timing closure.


5. Hardware Implementation

The recovered files preserve synthesis/implementation reports, a routed checkpoint and the matching aes_top.bit and aes_top.ltx programming files. The supplied hardware screenshot shows the xc7z020 target programmed and the VIO core active. Physical-board photographs are also preserved.

Physical setup

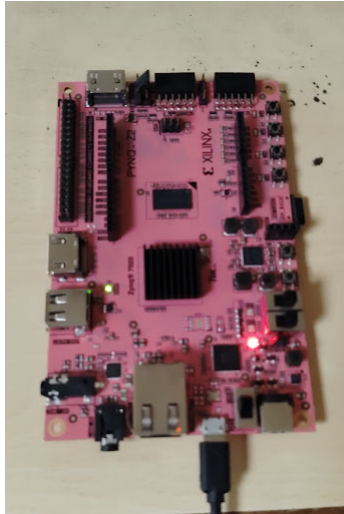

Existing PYNQ-Z2 setup photo extracted from page 53 of the uploaded project conversation. Original resolution: 347 x 512 pixels.

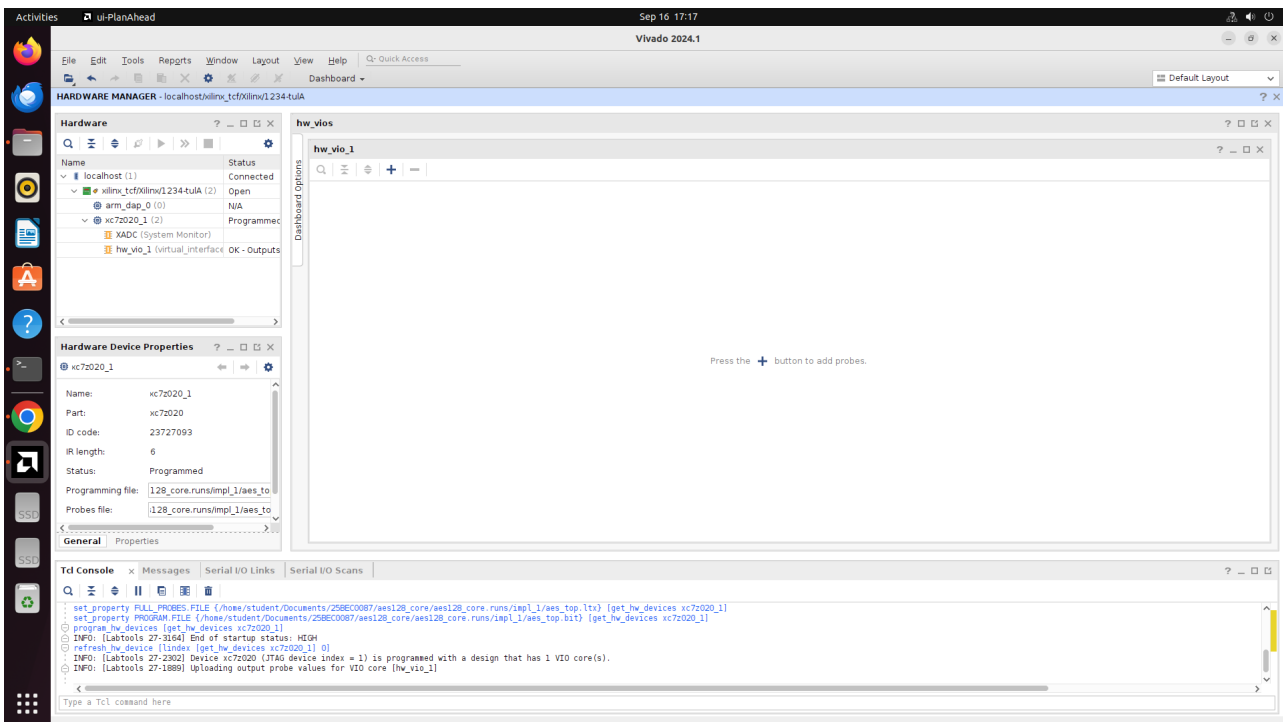

Original 1920 x 1080 Hardware Manager screenshot: programmed FPGA and active VIO. The dashboard is not displaying a completed encryption in this image.

Hardware result evidence

The project conversation discusses a 21-second clip and reports that its beginning displayed ciphertext 3ad77bb40d7a3660a89ecaf32466ef97 before reset. The package preserves its 512 x 278 poster as hardware_output.jpg. The original clip is unavailable here, and the poster is too small to independently verify all digits. Replace this poster with a readable frame from the original recording and add the video URL before submission.

5. Hardware Implementation - Build Results

Metric	Archived integrated-design result
Target device	xc7z020clg400-1
Clock constraint	8.00 ns / 125 MHz
Slice LUTs	3,222 of 53,200 (6.06%)
Slice registers	3,912 of 106,400 (3.68%)
Setup WNS / TNS	-0.104 ns / -0.276 ns
Setup-failing endpoints	4
Hold WHS / failing endpoints	+0.028 ns / 0
Timing report verdict	Timing constraints are not met.
Routed DRC report	Five warning checks; no listed error/critical-warning checks.

Timing qualification

The saved routed build fails setup timing at the declared 125 MHz clock. The failing paths are in AES key-expansion logic. The generated bitstream and a reported functional demonstration do not remove this constraint violation. The behavioral simulation runs at 100 MHz and is a separate verification condition.

Resource accounting

The utilization figures above apply to the integrated AES, VIO and debug infrastructure. They should not be presented as isolated AES-core utilization. The original utilization, timing, DRC, methodology, route-status and other reports are included in Documentation/Implementation_Reports/.

Reproducibility

Extract FPGA_Project_Files/Native_Project/Project1_AES_Vivado_Source.zip, keep its aes128_core folder intact and open aes128_core.xpr in Vivado 2025.1.1. Original source and generated IP dependencies are preserved; disposable caches and run folders are excluded. The routed checkpoint, reports and waveform database are supplied separately. Hardware programming uses the BIT/LTX pair in FPGA_Project_Files/Programming/.

Future timing work

A newer build should optimize the failing key-expansion paths and validate operation with the actual board clock. Relaxing the XDC period alone does not change the physical clock. Retain this report qualification until a subsequent routed report demonstrates closure.

6. Applications

This AES primitive can form part of an embedded cryptographic coprocessor, secure-communication subsystem or FPGA teaching platform. Its VIO interface is useful for laboratory testing and demonstration. A production system would additionally require suitable buffering/interfaces, secure key management, an appropriate encryption mode and authentication.

7. Conclusion

The recovered project demonstrates an iterative AES-128 RTL implementation, a passing archived single-vector behavioral simulation, FPGA synthesis/implementation, generated programming files and recorded physical-board setup/programming activity. The engineering workflow reaches the bitstream and demonstration stages.

Remaining limitations are the negative setup slack in the preserved build, limited regression coverage, and incomplete final hardware/video evidence. The ciphertext register persists, while done is a pulse; hardware readback should interpret this handshake correctly. Future work includes timing closure, additional vectors and corner-case testing, and a documented runtime interface.

Evidence and submission status

Evidence type	Included / remaining
Original files	RTL, XDC, VIO configuration, testbench, native project, BIT/LTX, saved WDB and reports.
Simulation	Original passing transcript and historical waveform photo; separate simulation PDF included.
Authored figures	Block diagram and source-derived structural RTL schematic.
Physical evidence	Board photos and programmed-VIO screenshot; result poster requires a readable replacement.
Video	Video_Link.txt is present and blank; insert the actual finished demonstration-video URL.

Source record

1. Original aes128_core.xpr.zip: recovered RTL, testbench, simulate.log, saved WDB, routed reports and programming outputs.
2. documents req.pdf: required folder layout and seven report sections.
3. Uploaded project conversation PDF, pp.38-54: archive transfer, VIO programming, board photo and video-poster context.
4. Original supplied PNG images: waveform photograph, source hierarchy/editor, programmed-VIO dashboard and loaded vectors.

This report was assembled from the preserved project evidence. No new Vivado simulation, synthesis, implementation or physical-board test was performed during document preparation.

1. Objective

Reconfigurable FPGA radar target detector

Official title: Design and Implementation of a Reconfigurable FPGA-Based Architecture for Real-Time Radar Signal Processing and Intelligent Target Detection.

Team member	Registration number
Shanshank Pulipati	25BEC0573
Kartik Yadav	25BEC0087

Team name: Beyond Boolean. **Platform:** PYNQ-Z2 / xc7z020clg400-1. **Tool:** Vivado 2025.1.1.
Processing clock: 50 MHz.

Implement a streaming cell-averaging constant-false-alarm-rate (CA-CFAR) style threshold detector in programmable logic. Demonstrate exact target detection, runtime sensitivity selection, valid-sample stalls and overflow-safe comparison using controlled synthetic magnitude sequences.

The FPGA generates and processes every sample; the host starts frames and reads retained results through Vivado VIO/JTAG. The scope is a reusable detection stage. RF acquisition, ADC, range/Doppler FFT, trained ML and partial bitstream reconfiguration are not implemented.

Verified outcome	Measured or checked result
Core simulation	10,721 checked results from 12,963 accepted samples
Controller and physical sweep	All 32 scenario/alpha/gap combinations plus repeat
Standard frame	80 full windows; targets at CUT indices 30, 60, 85
Routed timing	WNS 12.176 ns; WHS 0.018 ns; WPWS 2.000 ns

The original successful build and physical evidence are retained. This documentation update does not claim a new board execution. The original routed reports, checkpoint and native .xpr/IP source archive are now included. The final narrated video URL is intentionally blank.

2. Block diagram and detection method

PYNQ-Z2 radar target detector

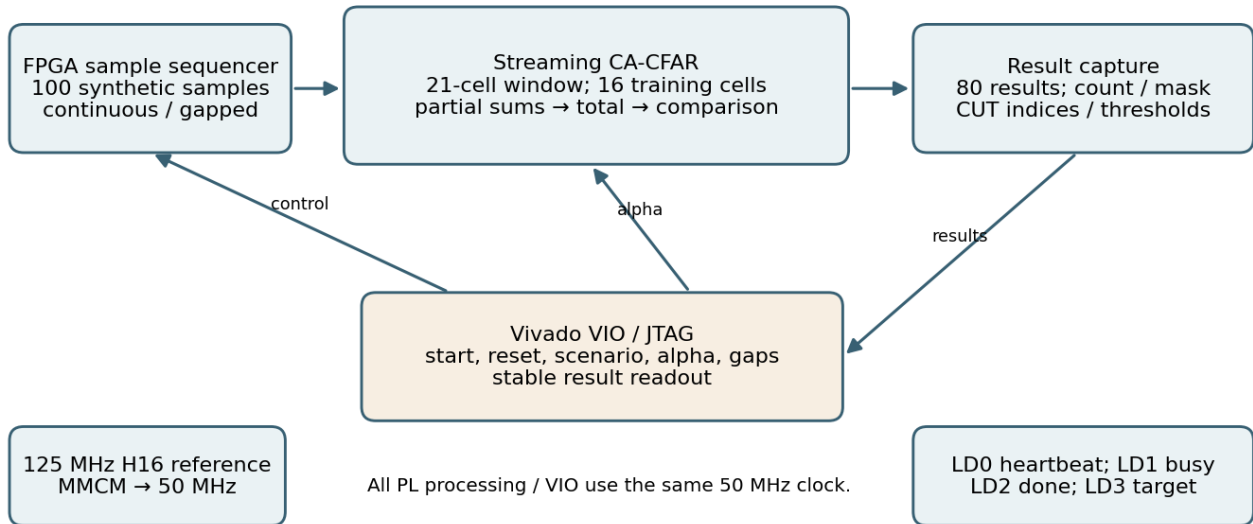


Figure 1. Source-derived architecture. The VIO, controller and detector share the 50 MHz clock. The H16 reference is nominally 125 MHz; the MMCM settings multiply by eight and divide by twenty.

A chronological window contains **8 training + 2 guard + 1 CUT + 2 guard + 8 training** samples. The sixteen training values are accumulated at full precision. Guard cells exclude nearby energy from the estimated background.

```

threshold = floor(training_sum / 16) * alpha
alpha = 1, 2, 4 or 8
detection = (unsigned CUT > full 19-bit threshold)
  
```

The total training sum has 20 bits; the full threshold has 19 bits. The displayed 16-bit threshold saturates at 65,535, while detection always uses the full threshold. Equality does not detect. These alpha values demonstrate sensitivity selection, not a calibrated probability of false alarm.

The window advances only on accepted samples. The first complete window uses samples 0-20 and reports CUT index 10. A 100-sample frame yields exactly 80 results, indices 10-89; no boundary padding is added. The controller drains the pending pipeline before finishing.

Partial training sums, total sum and threshold/comparison form three register stages. A result appears two clock intervals after accepting the newest sample in its full window. Configuration and CUT metadata travel with the arithmetic. Reset clears the window and pending valid results.

3. RTL design, hierarchy and schematic

Module / instance	Responsibility
radar_top	Board clock/MMCM, startup reset, VIO, LEDs and u_demo
radar_top.u_demo : radar_demo	Generate 100 samples; latch configuration; insert optional gaps; capture counts, masks, indices and timing
radar_demo.u_core : cfar_core	21-cell window, pipelined training sums, full-width threshold and comparison
radar_top.u_vio : vio_radar	Five control outputs and seventeen monitored inputs; generated by Vivado Tcl

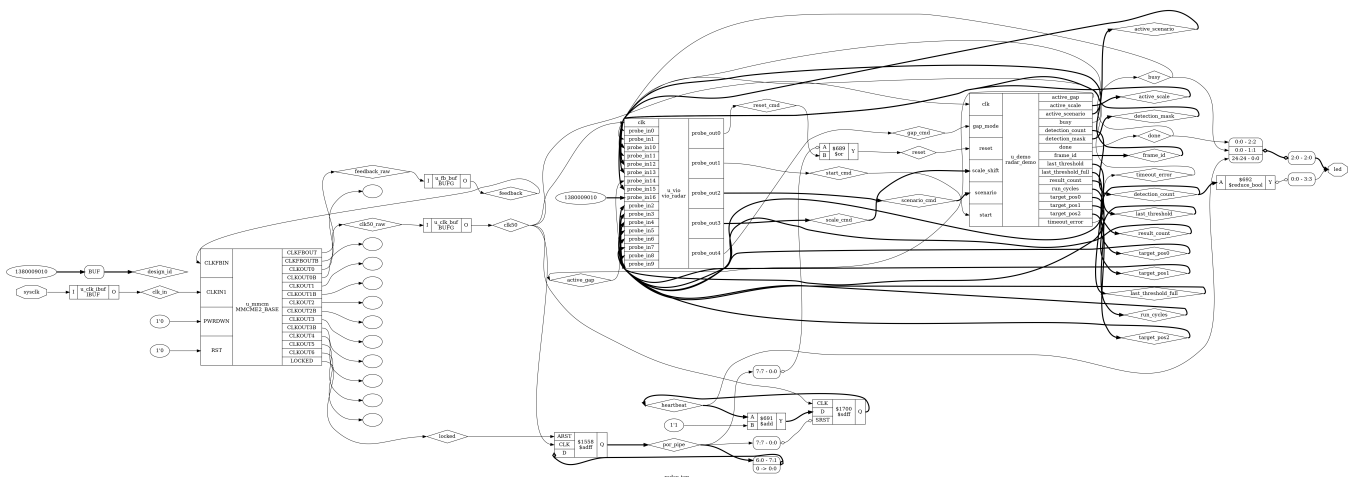


Figure 2. Genuine Yosys 0.33 elaborated top schematic. The full-resolution SVG/DOT, used-module JSON netlist and tool transcript are supplied for zoomed inspection. This overview is not a Vivado GUI export. Proprietary VIO and clock primitives are black boxes/library declarations in this offline structural check; their timing/behavior is established by the supplied Vivado build and physical evidence, not by Yosys.

Control and observation: reset, start, scenario, scale and gap are VIO outputs. Monitored values include busy/done, timeout, frame ID, counts, three positions, full detection mask, full/display thresholds, cycles, retained configuration and the RAD2 design identifier (0x52414432).

Clock/reset and constraints: 50 MHz clock buffers feed all processing and VIO. The eight-stage startup reset releases after clock lock. XDC assigns H16 and LEDs R14/P14/N16/M14, with LVCMOS33. Only human-visible LED output paths are false-pathed; detector/VIO internal paths are not exempted.

All three original RTL modules, both testbenches and all five original Vivado Tcl files retain exact byte/CRC identity with the successful build manifest. No functional RTL edit was made for this documentation upload.

4. Simulation results

The independent chronological-array scoreboard checks arithmetic, CUT indices, thresholds, valid timing and detections rather than reproducing the DUT shift-register implementation. Supplied Icarus Verilog 12.0 results passed on 8 October 2026. The full successful laptop log independently records both suites passing in Vivado XSim 2025.1.1.

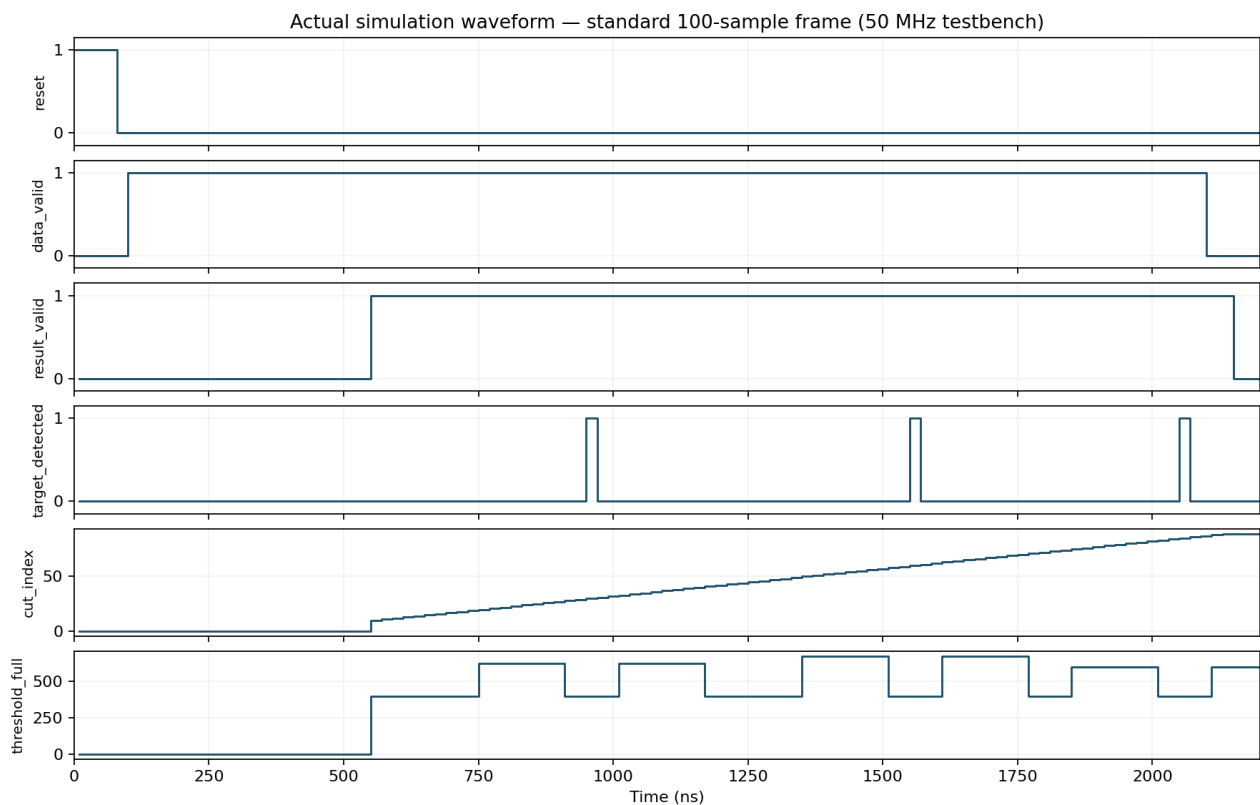


Figure 3. Actual supplied core VCD rendered as a waveform; not a fabricated GUI capture. The original VCD remains in Simulation/. See the dedicated simulation PDF for the standard-target plot, exact transcript and reproduction steps.

Test	Coverage / outcome
Core scoreboard	10,721 valid results; 12,963 samples; 112 directed/random/reset frame sequences
Core corner cases	Unsigned overflow, display saturation, equality, guards, truncation, gaps, random alpha changes, short frames and reset
Controller	4 scenarios x 4 alpha factors x 2 gap settings, then a repeat: 33 checked frames
Controller robustness	Held-start and reset during active frame checks
Standard synthetic sequence	Three detections at 30, 60, 85; 80 results for indices 10-89

Local simulation traces/logs are preserved under their real origin. The original Vivado log is Evidence/vivado_build.log. No additional simulator run is claimed during publication.

5. Hardware implementation - routed build

The supplied laptop build completed on **8 October 2026 at 22:40:16 IST**. It created a fresh xc7z020clg400-1 project, generated VIO, passed both XSim suites, synthesized, routed, checked setup/hold/pulse-width timing and DRC, and wrote matching bitstream/probe files. The full successful log and original BUILD_SUCCESS marker are included.

Metric	Actual available evidence
Vivado / device	2025.1.1 / xc7z020clg400-1
Processing clock	50 MHz; 20 ns period
WNS (setup slack)	12.176 ns
WHS (hold slack)	0.018 ns
WPWS (pulse-width slack)	2.000 ns
Bus skew	All four constraints MET; minimum slack 19.034 ns
Internal timing coverage	0 unconstrained internal endpoints
Routed DRC	0 Errors / Critical Warnings; 5 Warning checks
LUT / FF / BRAM / DSP	2010 LUTs / 3329 FF / 0 BRAM / 0 DSP; includes VIO/debug hub
Power	No measured power supplied; default-activity estimate not treated as measurement
Hardware outputs	Original radar_top.bit and radar_top.ltx, unchanged bytes

Recovered report review: all four bus-skew constraints pass. DRC reports three PDCN-1569 and one RTSTAT-10 warnings inside vendor dbg_hub, plus ZPS7-1 because this PL demonstration omits PS7. Methodology reports four LUTAR-1 async-reset warnings in debug-hub FIFOs. These warnings are disclosed, not claimed resolved. Retain the tested normal PYNQ boot setup. Check-timing reports zero unconstrained internal endpoints; only four intentionally false-pathed LED ports lack output-delay constraints.

Reports/ preserves the original eight report texts and routed checkpoint. FPGA_Project/ includes the successful native .xpr, VIO configuration/generated dependencies and original RTL/testbench/Tcl files, retaining their relative layout. Failed runs and disposable caches are excluded. Original Tcl remains the clean reproduction route; the tested BIT/LTX can be programmed without rebuilding.

An archive audit checks all eleven source CRCs and exact BIT/LTX SHA-256 identities, every saved board CSV row and the simulated standard-frame indices. Tools/validate_evidence.py records that audit; it does not rerun or remeasure hardware.

5. Hardware implementation - physical setup

The actual PYNQ-Z2 was programmed through Vivado Hardware Manager using the supplied matching BIT/LTX. The existing normal power/boot setup and USB/JTAG connection were used. Ethernet is visible in the photographs; the CFAR data/control path is in PL and VIO/JTAG, not network sample transport.



Figure 4. Original user-supplied PYNQ-Z2 setup photo from the Project 2 Drive folder. No generated hardware photograph is used.

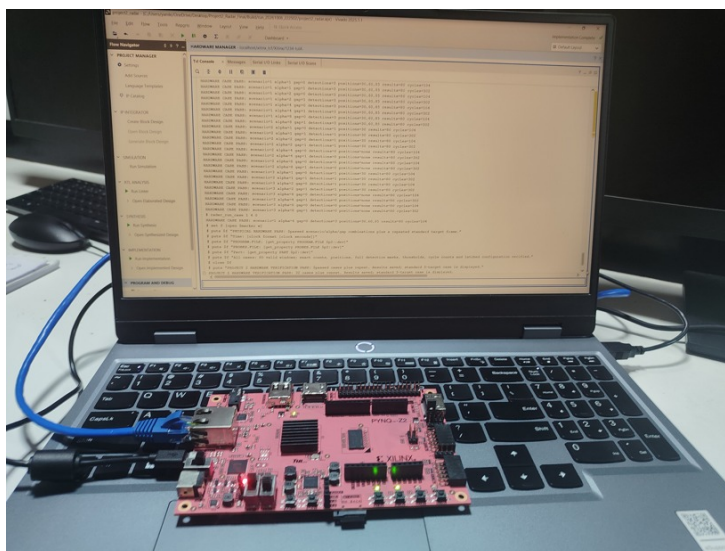


Figure 5. Original photo of the real board beside the laptop showing the passing Vivado hardware console. The exact console capture is supplied on the following page and in Images/.

5. Hardware implementation - verified output

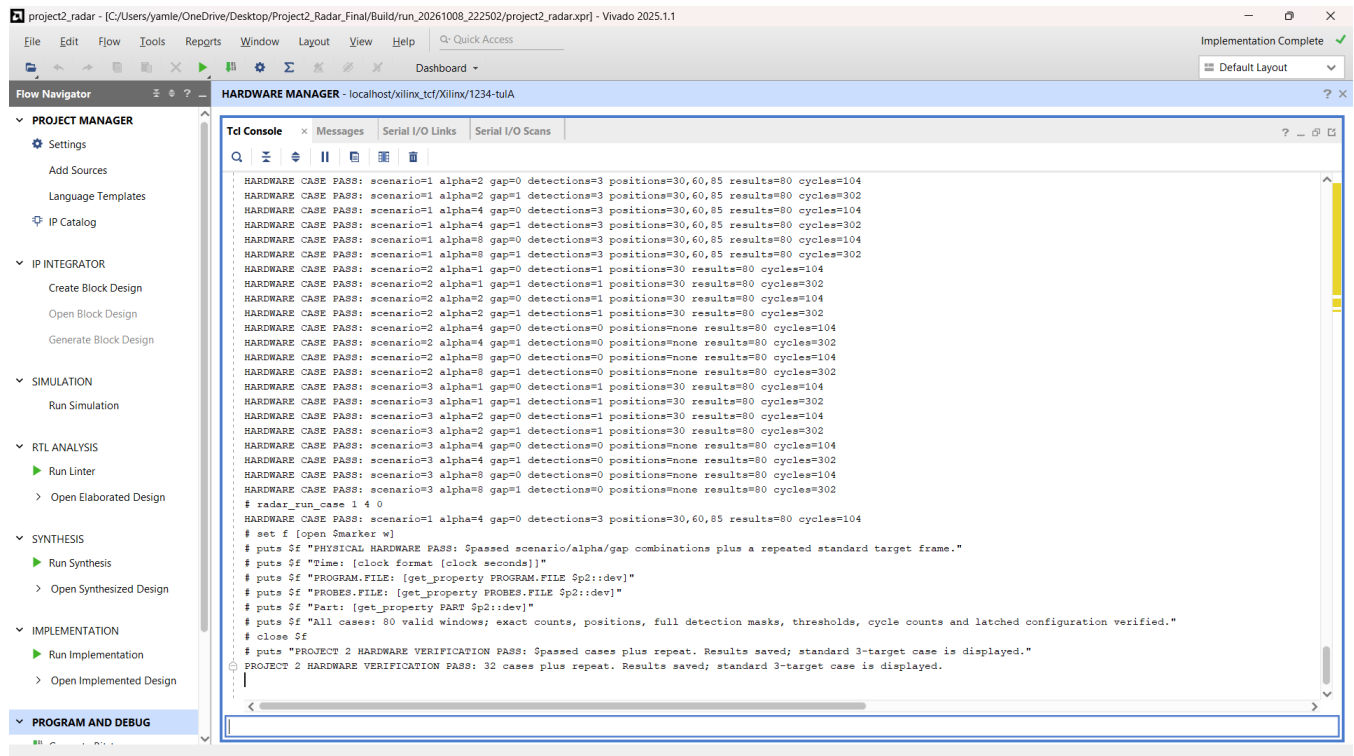


Figure 6. Actual Vivado console: all combinations passed and final standard three-target frame retained. Original HARDWARE_PASS marker time: 8 October 2026 23:54:05 IST.

Physical case	Alpha	Targets / zero-based indices
Noise: constant 100	1 / 2 / 4 / 8	0 / none
Targets 1000, 1200, 900; background 100	1 / 2 / 4 / 8	3 / 30, 60, 85
Weak 300; background 100	1 / 2	1 / 30
Weak 300; background 100	4 / 8	0 / none
Target 60000; background 20000	1 / 2	1 / 30
Target 60000; background 20000	4 / 8	0 / none; full-width threshold

Every scenario/factor pair passed with both continuous and gapped input: **32 unique combinations**, followed by a repeated standard frame. The unchanged saved CSV contains **39 PASS rows**, including additional repetitions/demonstrations. Reset explains repeated frame IDs in the later demonstration rows.

Each frame returned 80 windows. Continuous input takes 104 cycles (2.08 microseconds); two idle clocks between samples takes 302 cycles (6.04 microseconds). These are FPGA frame-processing times at 50 MHz, excluding host/JTAG command overhead.

The hardware script verifies counts, three positions, the full 128-bit detection mask, thresholds, cycles, frame/configuration and design ID before writing a PASS row. The CSV itself stores counts/cycles/last threshold, not separate position/mask columns; the PASS marker and console corroborate those additional checks.

6. Applications

A streaming background-adaptive threshold stage can follow a radar magnitude or power pipeline and mark candidate detections. Deterministic FPGA processing and one accepted sample per clock support integration with streaming acquisition/FFT logic. This controlled experiment establishes the detector arithmetic, valid timing and observation interface rather than a full sensing system.

Runtime alpha selection demonstrates the sensitivity tradeoff: the weak target at index 30 is rejected at factor four and accepted at factor two. The same hardware and bitstream handle both choices. Gapped input preserves the exact detections because the sample window advances only on `data_valid`.

7. Conclusion and future scope

The original complete design passed the independent core simulation, all controller cases and the physical 32-combination sweep plus repeat. The standard frame produced three correct indices and 80 full windows. Routed setup/hold/pulse-width margins are positive at the 50 MHz processing clock; the original bitstream and matching probes are preserved.

The original utilization, timing, methodology and bus-skew reports have been reviewed. Future work includes reviewing debug-IP warnings for deployment; integrating real acquisition and range/Doppler processing; calibrate alpha against representative clutter and false-alarm requirements; and validate performance on recorded or live radar measurements. A wider framing/index scheme would be needed for long streams beyond the demonstration's 100-sample frames.

Submission status: final narrated video URL intentionally blank. Team: Beyond Boolean. All required Project 2 technical-document categories are supplied, including original routed reports and the native project source archive. Completion of the final video and its accessible Drive link remains pending.

Evidence and primary references

Local evidence: Results/BUILD_SUCCESS.txt; Results/HARDWARE_PASS.txt; Results/hardware_results.csv; Evidence/vivado_build.log; Reports/*.rpt and routed_design.dcp; FPGA_Project/Project2_Radar_Vivado_Source.zip; Simulation/transcript.txt and VCD/CSV files. The readiness audit maps every organizer item to a file.

AMD/Xilinx PYNQ-Z2 XDC: github.com/Xilinx/xup_fpga_vivado_flow, [source/pynq-z2/lab5/uart_led_pins_pynq.xdc](#). AMD 7-Series Libraries Guide UG953: MMCME2_BASE. AMD Vivado Tcl Command Reference UG835: `commit_hw_vio` and `refresh_hw_vio`. Original links are in README.md.

FPGA-Accelerated ECG Filtering and Peak Analysis

Experiment 3 (Intermediate) | V-SPACE FPGA Build Challenge 2026

Field	Value
Platform	PYNQ-Z2 / Zynq XC7Z020 (xc7z020clg400-1)
Tools	Vitis HLS / Vivado 2025.1.1; PYNQ Python; independent Icarus Verilog 12.0 RTL verification
Confirmed members	Shanshank Pulipati - 25BEC0573; Kartik Yadav - 25BEC0087
Team name	Beyond Boolean

1. Objective

Accelerate 128-tap, 16-bit Q4.12 FIR preprocessing in FPGA programmable logic, transport samples through AXI DMA and verify the numerical output against an independent fixed-point reference. Demonstrate candidate ECG peak detection and heart-rate estimation in Python on the ARM processor using recorded MIT-BIH data. Live ECG sensor acquisition and clinical arrhythmia classification are outside the demonstrated scope.

2. Block Diagram

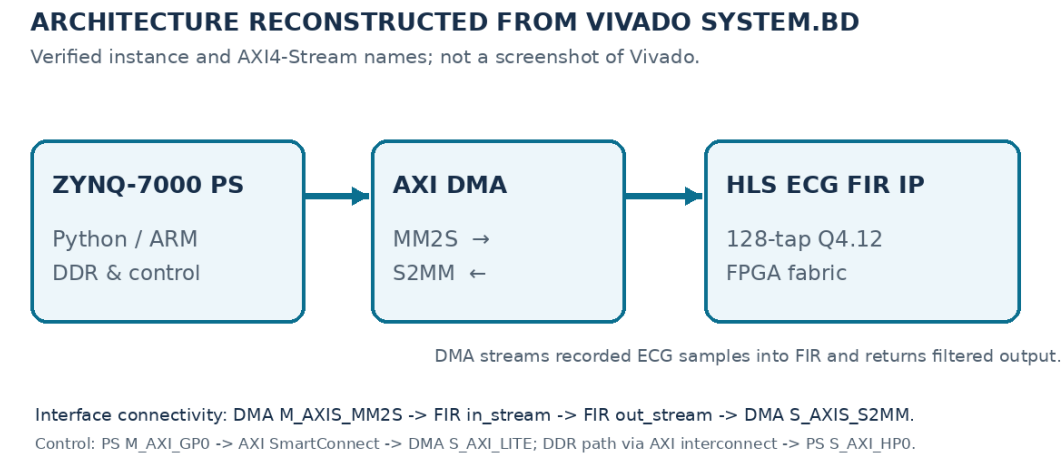


Figure 1. Architecture reconstructed from verified system.bd net names. This is a source-derived block diagram, not a Vivado GUI capture.

DDR samples pass through AXI DMA MM2S, the HLS FIR in_stream/out_stream interfaces and DMA S2MM back to memory. The Zynq PS controls DMA over AXI-Lite and accesses memory through the high-performance interconnect path.

3. RTL Design and Module Hierarchy

Module / source	Responsibility
ecg_bandpass_filter.cpp / .h	Original HLS C++ FIR function, fixed-point types and stream interface
ecg_bandpass_filter.v	Actual generated FIR top, count=2048 in the board design, active-low control reset
Pipeline_VITIS_LOOP_79_1 and mac_muladd modules	Generated pipelined filtering and multiply-add dependencies
regslice_both	Generated stream register slices
system_wrapper.v / system.bd	Vivado PS, DMA, interconnect and FIR integration

The expanded original IP package and all generated Verilog dependencies are supplied. The Vivado wrapper requires its block-design/vendor-IP hierarchy; the full original workspaces remain linked in SOURCE_PROVENANCE.md. Supplied XDC files are generated IP/out-of-context constraints rather than a claimed custom board pin constraint file.

4. Simulation Results

Original Vitis HLS C-simulation logs show a pass. Independent Icarus Verilog 12.0 simulation on 9 October 2026 now additionally checks the unchanged generated RTL. Four stimulus groups include impulse, sine, seeded signed random values and recorded ECG. Input gaps, output stalls, repeated 2048-sample batches, KEEP/STRB preservation and TLAST are tested.

Verification	Observed result
Independent RTL numerical check	28,672/28,672 exact samples; maximum absolute error 0 LSB
Stimulus composition	20,480 payload + 8,192 zero-flush samples
Batches / TLAST	14 batches; all frame and invocation counts pass
Stream checks	Output stability during backpressure; KEEP/STRB and TLAST pass
Reference cross-check	ECG integer reference agrees with saved physical-board output CSV

The generated FIR static state is cleared between independent inputs with a full zero batch, matching the existing board notebook. The testbench waits for ap_done and pipeline state writeback. The report does not assume that control reset alone clears FIR history.

3. RTL Design - Actual Vivado Capture

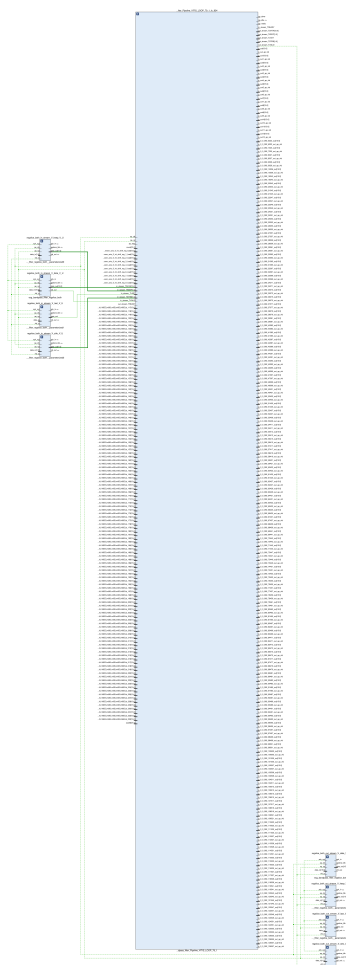


Figure 2. Actual Vivado 2025.1.1 elaborated FIR hierarchy exported by the team: one generated filtering pipeline and eight AXI-stream register-slice instances (9 cells, 28 displayed nets). The full vector PDF is supplied as *Images/rtl_schematic.pdf* for detailed zooming. This is a selected module hierarchy view; top-level primitive logic is retained in the source files.

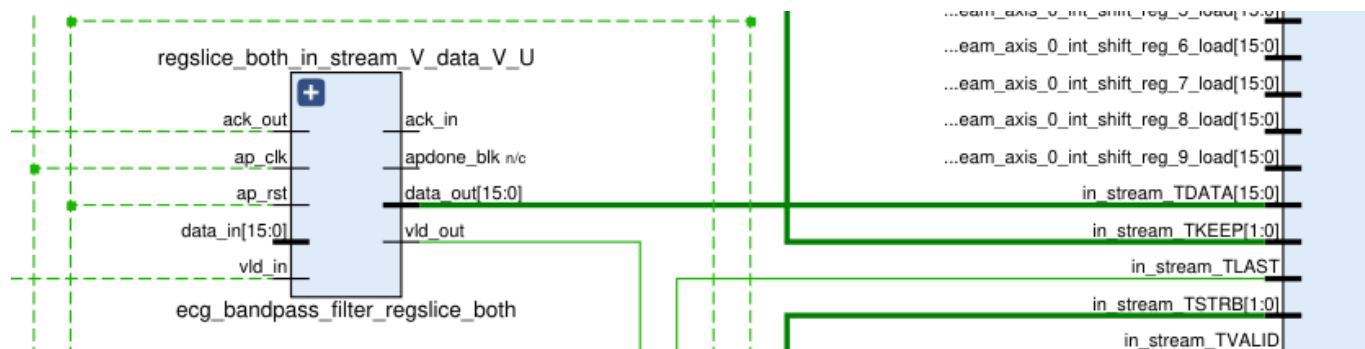


Figure 3. Magnified input-register-slice excerpt rendered directly from the same unmodified Vivado PDF. Labels and connections are preserved.

4. Simulation Results - Actual Waveform

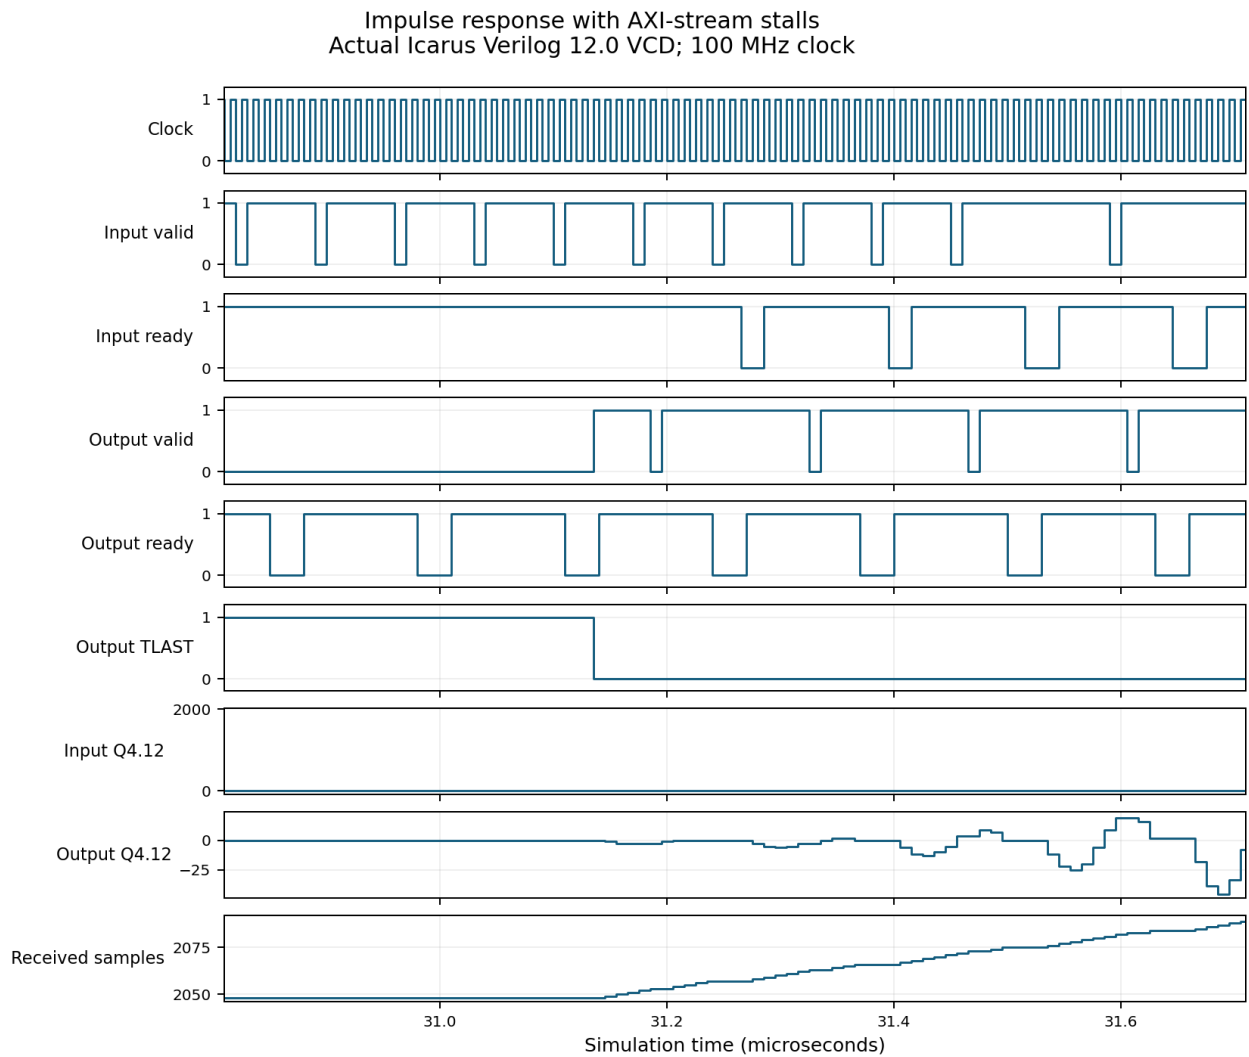


Figure 4. Actual generated-RTL waveform decoded from the saved Icarus VCD. All waveform points come from the executed simulation; this is not a conceptual timing drawing.

The full run is preserved in `Simulation/rtl_waveform.vcd.gz`. `Simulation/transcript.txt` contains the commands and actual passing outputs; `rtl_output_samples.csv` contains all 28,672 checked samples. The standalone simulation report provides the test scope and acceptance criteria. This unit simulation does not model the entire Zynq PS/DDR/DMA system.

5. Hardware Implementation

The original physical PYNQ-Z2 demonstration loaded the overlay and detected axi_dma_0. The matching BIT and HWH are retained unchanged. The XSA contains the same bitstream. The screenshot below is a recovered original Jupyter capture showing the loaded overlay and available IP; it is not a fresh board run.

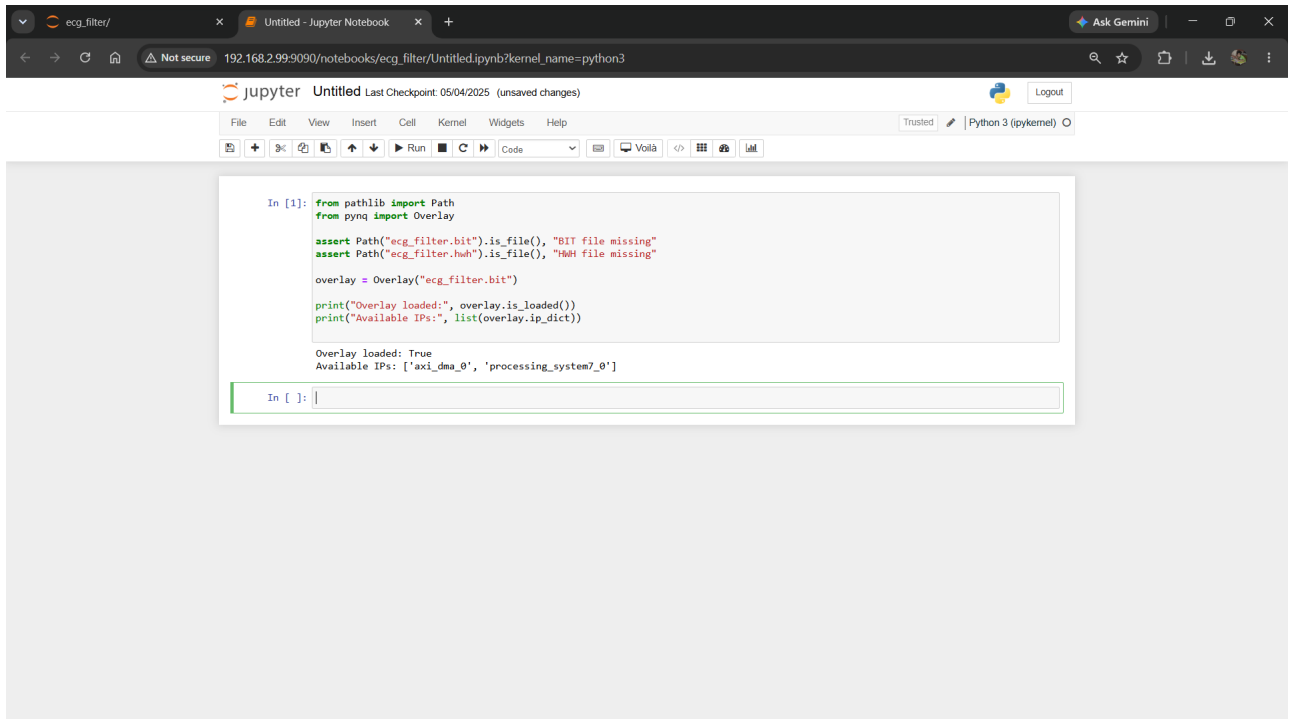


Figure 5. Original Jupyter screenshot: Overlay loaded: True; axi_dma_0 and processing_system7_0 detected. The original PNG is preserved; hardware_output.jpg is its uncropped format derivative.

Saved physical-board measurement	Result
Synthetic fixed-point comparison	2,048/2,048 exact samples; 0 Q4.12 LSB maximum error
5 Hz gain / 50 Hz reduction	0.9940 / 53.74 dB in the demonstrated sine test
Recorded ECG comparison	12,288/12,288 exact; six 2048-sample data batches
Python candidate peak analysis	42 peaks; mean RR about 0.812 s; heart rate 73.9 bpm
Python + DMA wall time	7.55 ms in the saved run; not FPGA-only latency

Whole-project placed resources from the original Vivado report: 7,232 slice LUTs, 13,844 slice registers, 2 block RAM tiles and 40 DSPs. These are not FIR-only counts. The original timing and routed DRC reports remain supplied.

5. Hardware Implementation - Saved Output Plots

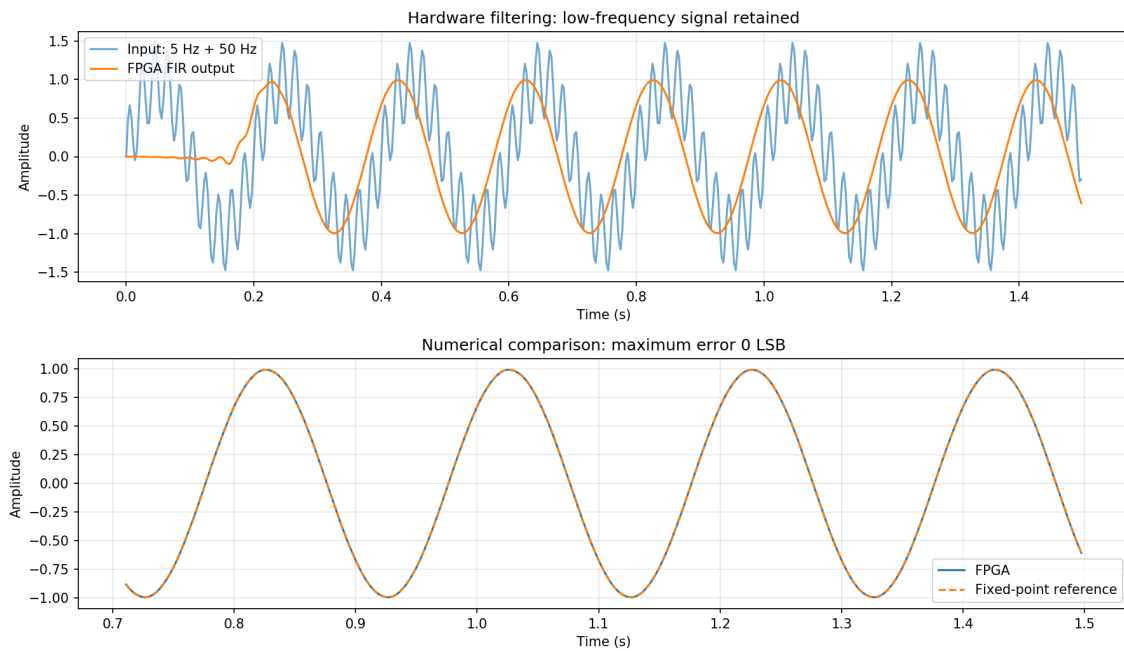


Figure 6. Original saved board sine-response and fixed-point comparison plot.

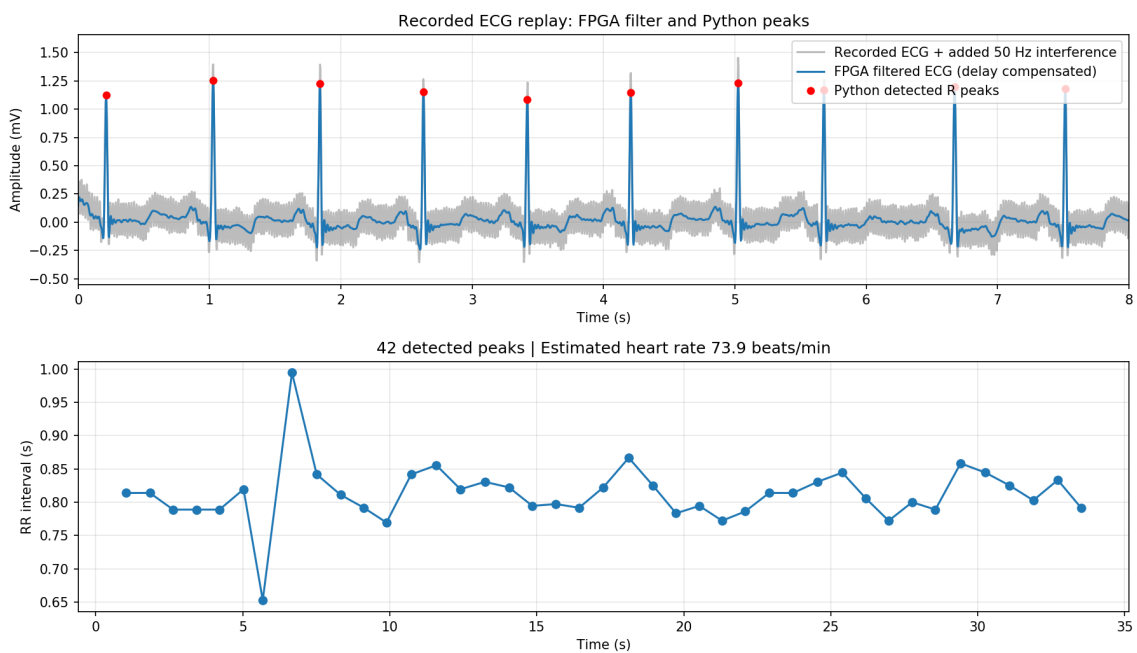


Figure 7. Original saved board ECG replay and Python peak analysis. The record is MIT-BIH 100 MLII, sampled at 360 Hz, with 0.15 mV added 50 Hz interference. FIR filtering is FPGA logic; peak detection is Python on ARM.

The actual setup photograph and Vivado capture have now been supplied and are incorporated in this report.

5. Hardware Implementation - Physical Setup



Figure 8. Actual team-supplied PYNQ-Z2 setup photograph, supplied 9 October 2026. The USB and Ethernet connections and illuminated board LEDs are visible. The original JPEG bytes are retained as `Images/board_setup.jpg`. The photo documents the setup; numerical hardware-test evidence remains in the saved executed notebooks and result files.

6. Applications

Educational PS/PL biomedical signal processing; FPGA preprocessing for embedded signal-analysis systems; and demonstrations of fixed-point accuracy, memory-to-stream DMA and hardware/software co-design. Medical diagnosis would need separate sensor interfacing and validation; that capability is not claimed by this demonstration.

7. Conclusion and Future Scope

The saved physical-board demonstration verifies exact filtering for synthetic and recorded ECG inputs and performs candidate peak/heart-rate analysis on ARM. The additional independent RTL test verifies exact core samples and tested stream protocol behavior under stalls and across batch boundaries. Future work includes live acquisition, broader signal validation, hardware peak detection and controlled performance benchmarking.

Evidence and Reproduction

Original HLS/Vivado workspaces, the original packaged IP and saved physical-board results are preserved or linked in SOURCE_PROVENANCE.md. Testbench/run_rtl_sim.py reproduces the independent unit simulation. The waveform PNGs are derived from its actual VCD. rtl_run_metadata.json identifies the simulator and hashes the tested RTL/testbench files. FILE_MANIFEST.json checksums the package.

MIT-BIH Arrhythmia Database v1.0.0, record 100 MLII, samples 0-12287, 360 Hz. Source: <https://physionet.org/content/mitdb/1.0.0/>. Attribution/license details are in PYNQ_Hardware/DATA_SOURCE.md.

Submission Status

The Project 3 file set now includes the required four images, Verilog testbench, actual RTL waveform/transcript/simulation report, confirmed team details and this seven-section project report. Team: Beyond Boolean; Shanshank Pulipati (25BEC0573) and Kartik Yadav (25BEC0087). The final demo URL is recorded in Video_Link.txt; see Documentation/VIDEO_REVIEW.md for content and access review.

The seven-section format follows the organizer-provided documents_req.pdf. The full five-project report is a separate team-level deliverable.

Design of an FPGA-Based Hardware Accelerator for Low-Latency Neural Network Inference

Experiment 4 - Intermediate

Vivado 2025.1.1 | xc7z020clg400-1 | 50 MHz | audit: 9 October 2026 (IST)

Team: Beyond Boolean. Members: Shanshank Pulipati (25BEC0573) and Kartik Yadav (25BEC0087).

1. Objective

Implement a trained 4-input, 4-hidden-neuron, 3-output Iris classifier on the PYNQ-Z2. Compare a pipelined parallel accelerator with a sequential shared-MAC core using identical frozen weights, arithmetic, inputs and clock frequency.

The engineering question is whether parallel hardware reduces inference latency, and what DSP/resource cost that reduction requires. Software performs training and input preparation; neural inference itself executes in FPGA logic.

Verified metric	Result
Physical numeric correctness	45/45 held-out inputs match every frozen integer score
Classification accuracy	43/45 (95.56%); two model errors
Core latency at 50 MHz	Parallel: 4 cycles / 80 ns; sequential: 36 cycles / 720 ns
Architecture comparison	9x lower core latency; host/JTAG transfer time excluded
Routed timing	Setup +5.813 ns; hold +0.048 ns; no failing endpoints


Demonstration scope

This is a small classification benchmark demonstrating fixed-point inference and an FPGA architecture tradeoff. It does not validate an application-specific sensor system or claim an end-to-end CPU speedup. The VIO transaction wrapper runs one comparison at a time; the parallel core alone accepts a new input each clock.

2. Block Diagram

Project 4 • Trained 4 → 4 → 3 neural network

PYNQ-Z2 / SystemVerilog / equal-clock FPGA architecture comparison

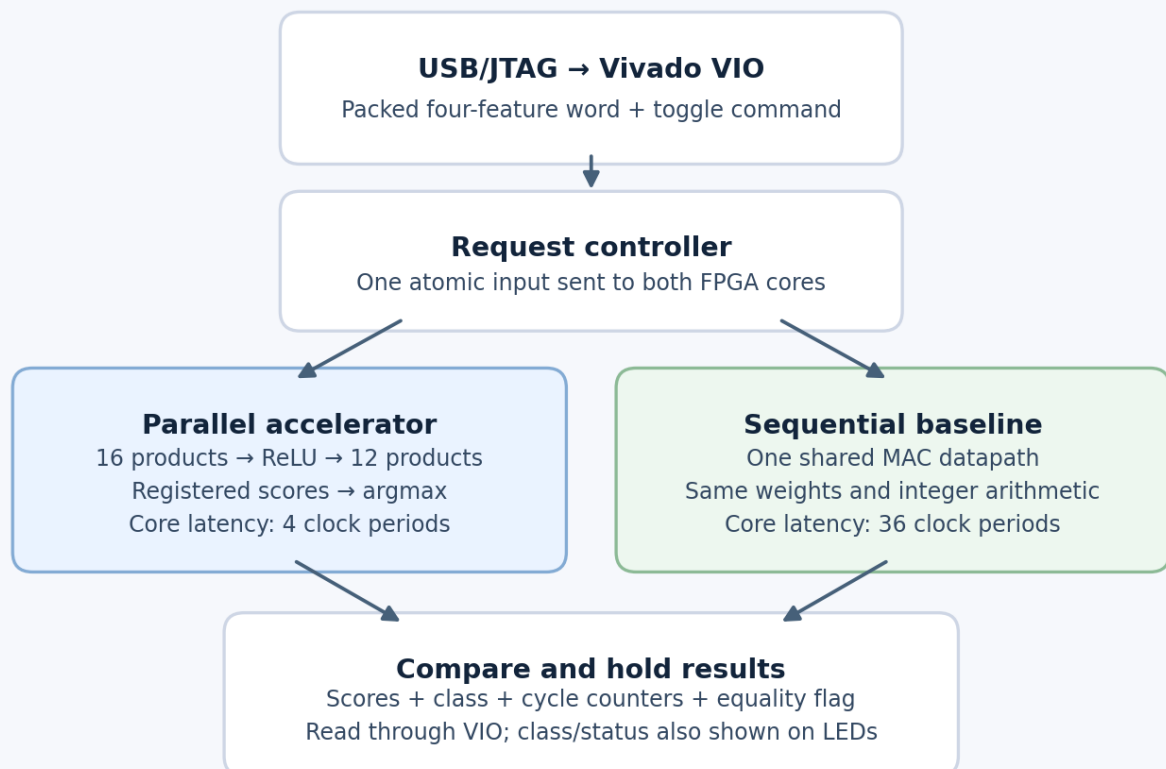

50 MHz target: 80 ns vs 720 ns after timing closure and board verification. JTAG overhead excluded.

Source-derived architecture diagram from the original implementation pack. Clocking Wizard generates 50 MHz from the board 125 MHz PL clock; lock release is synchronized. Vivado VIO drives reset, a command toggle and the packed input word. The controller launches both cores and holds their results for JTAG inspection.

Model and numeric representation


Item	Frozen implementation
Dataset split	90 training / 15 validation / 45 held-out; 150 Iris records
Features and classes	Sepal length/width and petal length/width; 0 Setosa, 1 Versicolor, 2 Virginica
Input and weight formats	Signed 8-bit inputs at scale 32; signed 8-bit weights at scale 64
Internal arithmetic	16-bit hidden activations; 32-bit sums/scores; input byte i is features[8*i + : 8]
Activation and prediction	Arithmetic shift by 6 then ReLU saturation to 0..32767; signed argmax with lower-index tie priority

3. RTL Design

File / instance	Function
nn_board_top.sv	Board clock/reset, clock/VIO IP, heartbeat and class/status LEDs
nn_demo_controller.sv / u_demo	Toggle launch, busy rejection, sticky scores/classes, counters and mismatch comparison
nn_parallel.sv / u_parallel	16 first-layer products, ReLU, 12 second-layer products, scores and argmax
nn_serial.sv / u_serial	One shared multiplication/MAC datapath controlled by a sequencer
nn_weights.vh; nn_math.vh	Frozen weights/biases; signed extension, saturation and argmax helpers
pynq_z2.xdc	Board sysclk/LED pins and exceptions; primary clock supplied by Clocking Wizard

Parallel pipeline: elapsed periods from acceptance


E0: input/products captured. **E1:** first-layer sums, bias, rescale and ReLU. **E2:** second-layer products. **E3:** three scores. **E4:** valid scores and class. Five registered stages span four elapsed clock periods.

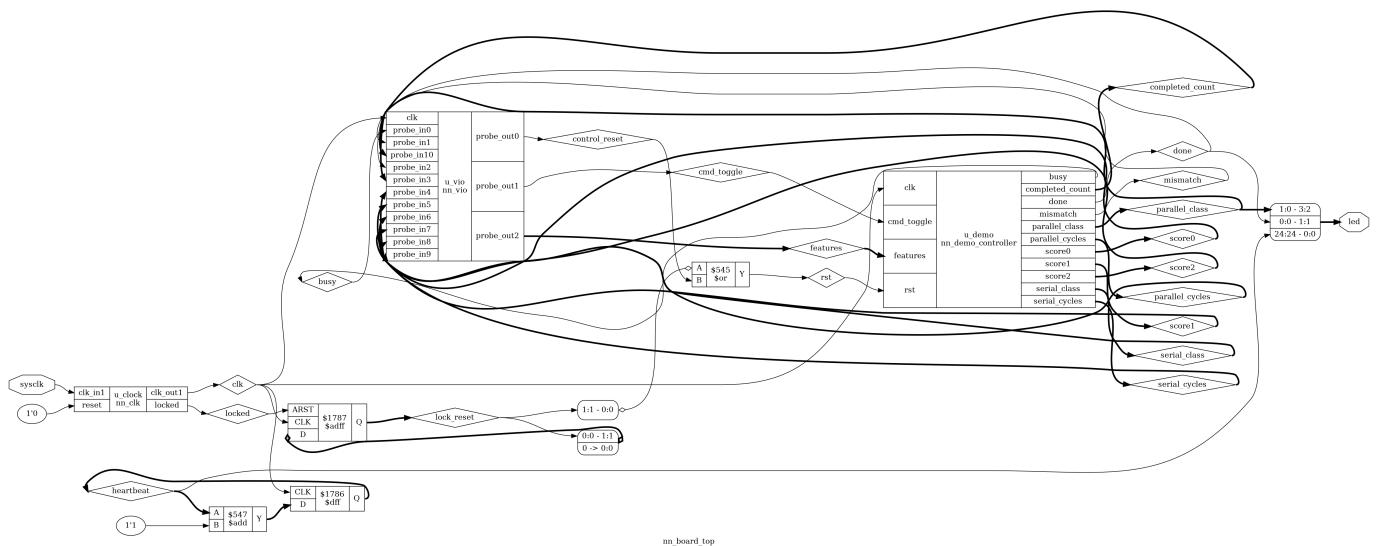

Actual source-elaborated schematic generated with Yosys 0.33 and Graphviz. Clocking Wizard and VIO are port-accurate black boxes for this view; their vendor internals are not simulated by these declarations. This is not a Vivado GUI capture. Full-resolution PNG/SVG, netlist, tool transcript and reproduction recipe are included.

4. Simulation Results

Original local XSim evidence is preserved in Results/vivado_batch.log and simulation_pass.flag. Icarus Verilog 12.0 regression and VCD capture provide additional simulation evidence. On 9 October 2026 (IST), the unchanged source passed the full suite and three-case waveform bench again in local Vivado XSim 2025.1.1. The new outputs are current_xsim_regression.txt and current_xsim_waveform.txt; the original Icarus waveform is retained.

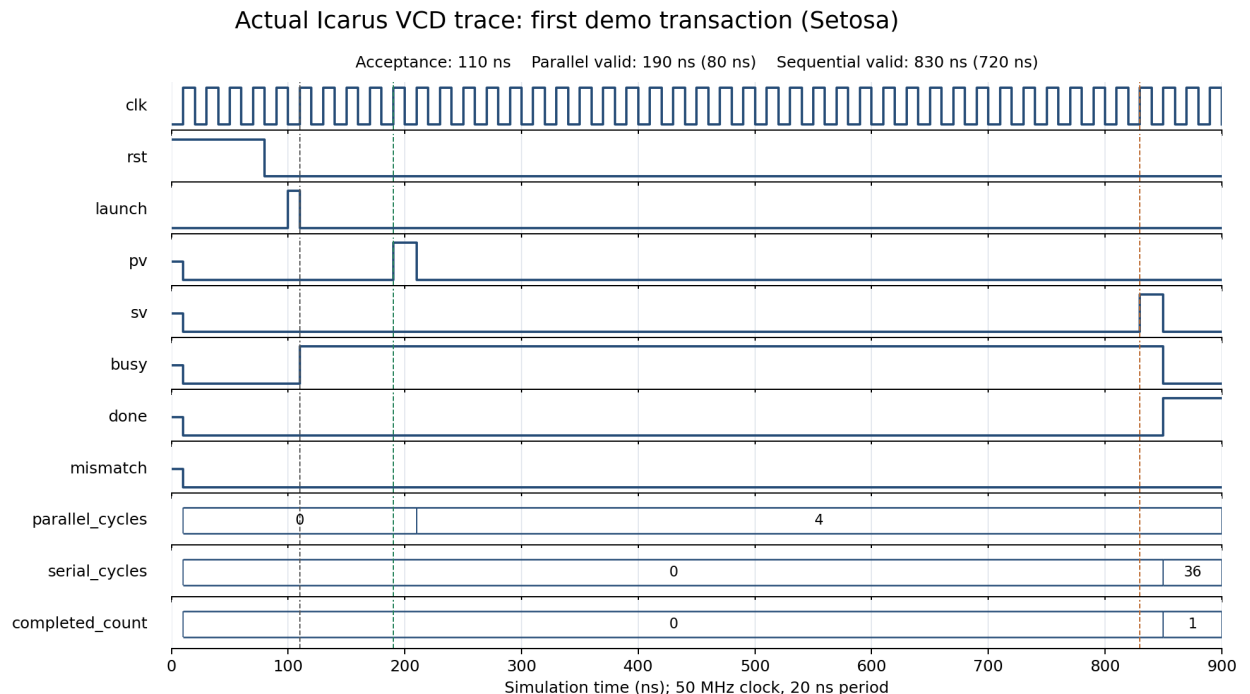

Measured from actual VCD transitions: first input accepted at 110 ns; parallel output valid at 190 ns; sequential output valid at 830 ns. Sticky controller outputs are captured later, so the picture distinguishes core valid timing from the host-visible comparison result.

PASS reset abort/recovery, argmax ties, ReLU saturation
PASS parallel: 4502 vectors, full-rate bursts + bubbles, latency=4 periods
PASS wrapper: 150 Iris samples, held toggle, busy rejection, reset abort, counters
PASS serial: 4502 vectors, input latching, latency=36 periods
ALL TESTS PASSED
Testbench/tb_nn.sv:169: \$finish called at 3421600000 (1ps)


The full regression verifies exact scores and classes for 4,502 vectors per core, full-rate parallel bursts and bubbles, sequential input latching, 150 controller cases, held-toggle non-retriggering, busy rejection, reset cancellation/recovery, argmax ties and ReLU saturation. The supplementary waveform bench independently checks the three recorded demo inputs and 4/36-cycle valid timing.

5. Hardware Implementation

The team programmed the physical PYNQ-Z2 over USB/JTAG and ran `hardware_test.tcl` on 7 October. The script checked 45 held-out records against frozen reference scores. Board photo, hardware PASS screenshot, three-case console output and final VIO screenshot are preserved in Images/.

Scope	LUTs	FFs	DSPs
Parallel core	247	263	28
Sequential core	208	330	1
Whole board design	1515	2648	29


Raw routed reports: setup +5.813 ns; hold +0.048 ns; pulse width +2.000 ns; all four bus-skew checks pass, minimum slack +19.066 ns. The original matching 6 October bitstream and LTX pair are included; the reports describe the recorded build.

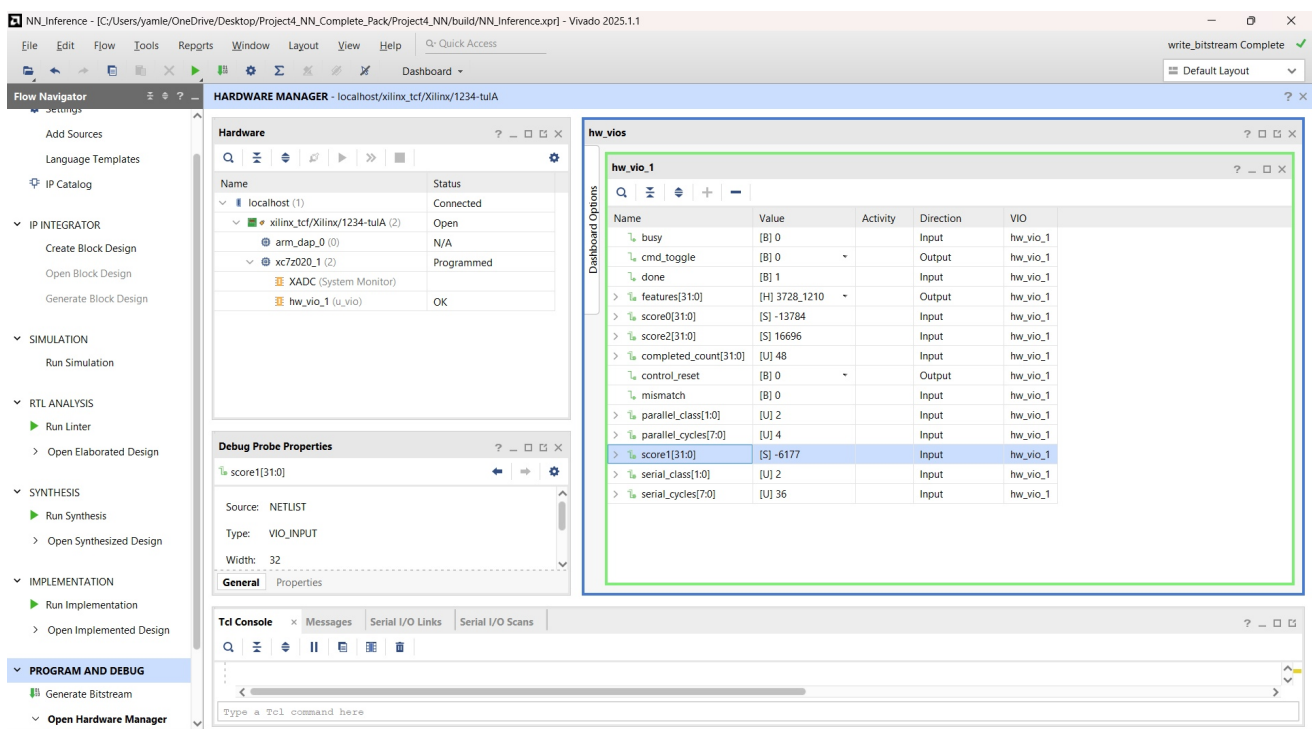

Final VIO output for 37281210: both classes 2, scores -13784 / -6177 / 16696, mismatch 0, cycles 4/36, completed count 48. The visible values were read from actual FPGA probes.

Numeric correctness is 45/45, while species accuracy is 43/45. Records 68 and 138 are misclassified by the model but their FPGA scores match the software model exactly. The saved CSV was independently cross-checked against all frozen test records.

5. Hardware Implementation (continued)

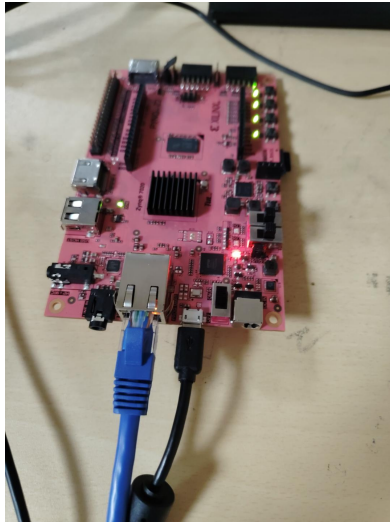

PYNQ-Z2 setup photograph: PYNQ-Z2 with USB/JTAG and Ethernet attached. Ethernet/Jupyter is not used for this RTL/VIO inference workflow. VIO availability and the heartbeat were observed after programming.

Warnings and script maintenance

DRC reports 44 warnings and no errors; methodology reports four LUTAR-1 reset warnings inside AMD debug-hub IP. DSP pipeline warnings are performance recommendations; timing meets the chosen 50 MHz target. ZPS7-1 remains recorded in the PL-only design. Raw reports are retained, and successful physical VIO testing supplies board/clock evidence for this setup.

The VIO script originally parsed all readbacks as hexadecimal. Decimal display caused a false timeout although hardware finished correctly. `nn_hw_read` now uses `INPUT_VALUE_RADIX` and restores signed scores as 32-bit two's-complement values. The corrected reader was tested in the live session; the persistent repository script includes it. HDL/model and bitstream are unchanged.

6. Applications

The architecture illustrates low-latency embedded classification, FPGA ML teaching and controlled resource/latency comparisons. Applying it to industrial inspection or sensor processing requires suitable training data, preprocessing and domain validation. More parallel arithmetic trades DSP use for latency; the small Iris model makes that tradeoff easy to reproduce.

7. Conclusion

A trained quantized network executes correctly in two FPGA architectures. Both match the integer reference; the parallel implementation reduces core latency from 36 to 4 cycles at the same 50 MHz clock. The experiment demonstrates fixed-point arithmetic, pipelining, resource sharing, verification and hardware debugging.

Future scope: larger datasets/networks, configurable weights, measured power and an AXI-stream/DMA interface. Team identity and final demo URL are recorded.

Evidence/RAW_VIDEO.md preserves the raw recording; Video_Link.txt points to the final edit. Content and public reviewer access need review (Documentation/VIDEO_REVIEW.md). The final video must include introduction, problem, architecture/RTL presentation, working hardware and conclusion.

The original native Vivado project descriptor and clock/VIO IP configuration files were recovered from the laptop and archived in `FPGA_Project/Project4_NN_Vivado_Source_Project.zip` with the source tree. Original descriptor/IP bytes are preserved, including machine-specific paths and historical run settings. Generated caches/runs are excluded. Use the supplied project-generation Tcl for a clean relocated rebuild.

Evidence sources: `Data/model.json` and `iris_cases.csv`; `Results/*.rpt` and `vivado_batch.log`; `Evidence/hardware_test_results.csv` and `hardware_validation.json`; `Simulation/transcript.txt` and `waveform.vcd`. Dataset attribution and original guide are included in `Data/ATTRIBUTION.md` and `START_HERE.md`.


Reconfigurable FPGA BNN Safety Response

Project 5 | Advanced experiment | PYNQ-Z2 | Vivado 2025.1.1

A fixed-topology 16-16-4 neural policy engine with two checked parameter banks and an independent latched fault controller.

Team: Beyond Boolean. Shanshank Pulipati (25BEC0573); Kartik Yadav (25BEC0087). Project 5 report; evidence updated 10 October 2026.

Project 5: runtime parameter reconfiguration with a fixed topology

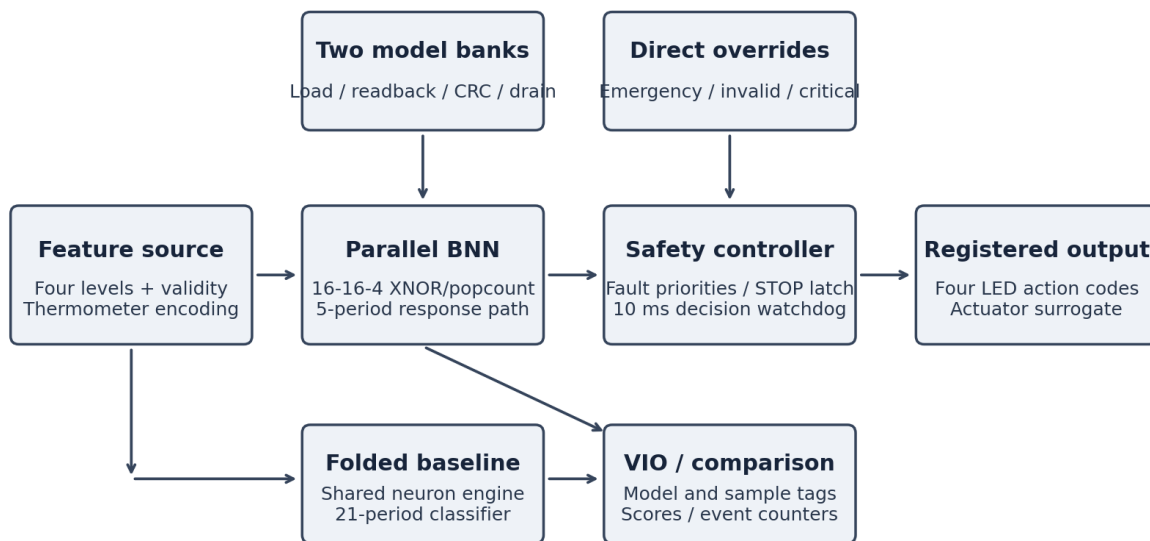

Evidence status

Five original XSim suites and routed timing checks passed. The physical core result shows 64/64 PASS and the recorded live Tcl log reports HARDWARE LIVE PASS. The earlier demo records model/fault behaviors; its last watchdog recovery remained STOP. The replacement final edit needs content review. See section 5 for the limits of the available evidence.

1. Objective


Build and verify a parameter-reconfigurable, DSP-free 16-16-4 binarized neural network on PYNQ-Z2, with an independent fault controller. Demonstrate normal/cautious policy changes, emergency STOP, explicit safe clear and a stale-input watchdog using real FPGA telemetry and LEDs.

Inputs are synthetic four features, each with levels 0..4, represented as four nibbles, converted to 16 thermometer bits. Outputs are CONTINUE (0), CAUTION (1), BRAKE (2), STOP (3). No camera, external sensor, motor or real vehicle is connected. Low neural latency is demonstrated; complete sensor-to-actuator safety is not established.

2. Block diagram

bnn_board_top maps PYNQ pins, generated clock and VIO to bnn_system. The system produces tagged frames, routes commands to checked model banks, launches inference, and passes the parallel proposal to bnn_safety. The folded engine is used in controlled comparison tests; live operation uses the parallel engine.

Each model bank contains 42 canonical 16-bit words. CRC-16/CCITT-FALSE scans address/high-byte/low-byte for 1,008 cycles. The bank is sealed only after a correct CRC; active-bank writes are protected. Commit drains in-flight inference and changes the bank/model identity atomically. Old sealed parameters support rollback.

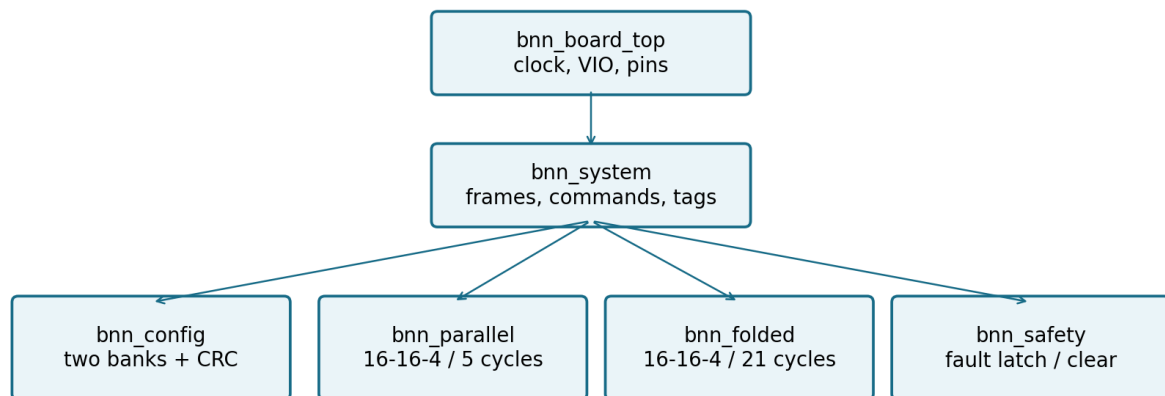

Shared bnn_math_pkg: XNOR/popcount, signed scores, tie and margin rules

Source-derived hierarchy/connectivity | generated IP: bnn_clk, bnn_vio, dbg_hub

Module hierarchy/connectivity derived from source RTL. Not a captured Vivado elaboration window.

3. RTL design

Seven SystemVerilog files: `bnn_math_pkg` supplies arithmetic/encoding rules; `bnn_parallel` pipelines the 16-16-4 network; `bnn_folded` reuses arithmetic across hidden/output stages; `bnn_config` manages parameter banks, CRC and commit; `bnn_safety` arbitrates faults/arm/clear; `bnn_system` handles commands, sampling and tagged results; `bnn_board_top` connects the clock/VIO IP, switches, buttons and LEDs. `pynq_z2.xdc` constrains the board pins and clocks.

XNOR/popcount implements binary dot products. Output score = $2 * \text{popcount} - 16 + \text{signed bias}$, with 9-bit signed scores (-144..143). Equal scores choose the higher class index; margin is best minus runner-up. Raw neural proposal and enforced safety action are distinct.


BTN0 requests emergency STOP, BTN1 eligible clear, BTN2 advances a preset, BTN3 resets. SW0 selects run behavior; SW1 pauses frames for watchdog testing. Sampling period is 50,000 cycles (1 ms); watchdog threshold is 500,000 cycles (10 ms). LD0 is heartbeat, LD1 armed, LD2/LD3 encode action. STOP is sticky. Safe input alone, bank switching or fresh frames do not clear it. Eligible clear requires a current, fresh, matching-model CONTINUE result and no competing fault.

4. Simulation

Original Vivado batch output and five suite PASS files are retained. Core tests verify 65,536 binary vectors per profile per core (131,072 results per core), including full hidden bits, all signed scores, class, margin and model tags. Parallel latency is 5 cycles, folded 21; initiation intervals are 1 and 22. Arithmetic checks include all 65,536 popcounts and 4,352 score extremes.

Diagnostics use 1,024 randomized model images / 4,096 output checks. Configuration covers 1,216 checks and occupancies 0..21. Safety uses 26 directed checks; integrated system tests cover 6,615 checks and 1,250 raw comparisons. The additional real Icarus VCD trace verifies 12 directed cases against the same frozen goldens and illustrates the model-dependent action for 0222.

Normal/cautious synthetic classifiers achieve 125/125 held-out cases each; 625/625 checks cover the full valid domain, including training cases. These measurements are synthetic policy agreement, not real-world safety accuracy. Training uses discrete binary/integer search with a fixed monotone hidden projection.

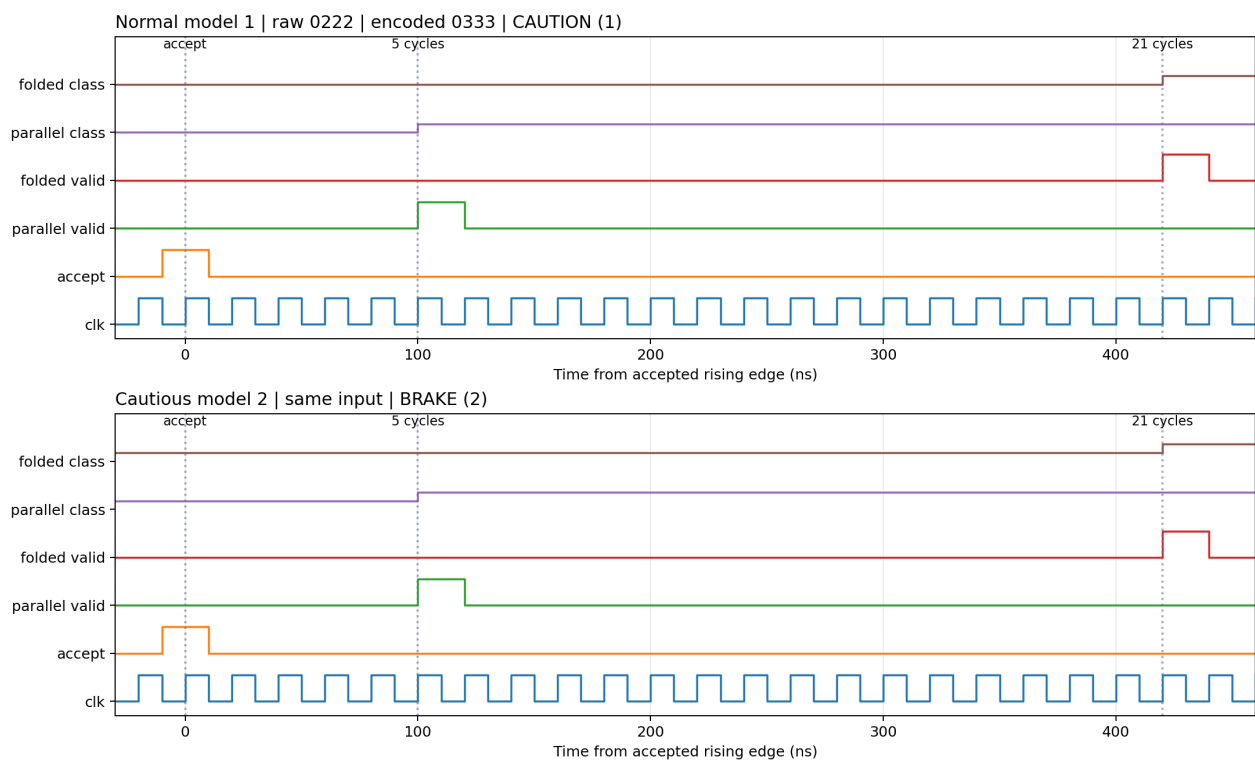

Actual Icarus VCD: same input 0222 yields normal CAUTION and cautious BRAKE. Parallel/folded results arrive at 5/21 cycles.


5. Hardware implementation

Original Vivado 2025.1.1 run: xc7z020clg400-1, 125 MHz physical reference and 50 MHz design clock. Routed setup slack +4.534 ns; hold +0.035 ns; pulse-width violations 0; all four bus-skew constraints pass. DRC has 0 errors and 5 warnings (debug LUT/unloaded-net issues and absent PS7/startup-clock caution). Raw DRC, methodology and CDC reports are included rather than treating warnings as zero.

Whole routed board/debug design uses 5,772 LUTs and 6,501 FFs, with 0 BRAM and 0 DSP. Parallel core: 204 total LUTs, 288 FFs. Folded: 314 LUTs, 120 FFs. Thus folding saves FFs but increases LUTs here. Neural result latencies are 100 and 420 ns at 50 MHz; their 4.2 ratio is not a complete system-speedup measurement.

Physical core verification shows **HARDWARE CORE PASS: 64/64** (32 cases/profile). The supplied complete live Tcl log ends **HARDWARE LIVE PASS**. Operator telemetry and video demonstrate model 1 CAUTION to model 2 BRAKE for raw 0222, emergency latching, fresh input retaining STOP, explicit emergency clear and watchdog history 8.

The earlier recording does not successfully finish watchdog recovery: final state remains action 3/tripped 1/history 8 after rollback, then disarms. Earlier operator snapshots did show eligible watchdog clear to action 0/tripped 0. The original hardware CSV and both hardware PASS files are now included in the Results run. All 64 CSV rows were checked against the frozen reference cases: hidden bits, all four signed scores, class, margin, model ID and 5/21-cycle latencies match. Original generated .xpr is not included; Tcl/IP scripts regenerate it.

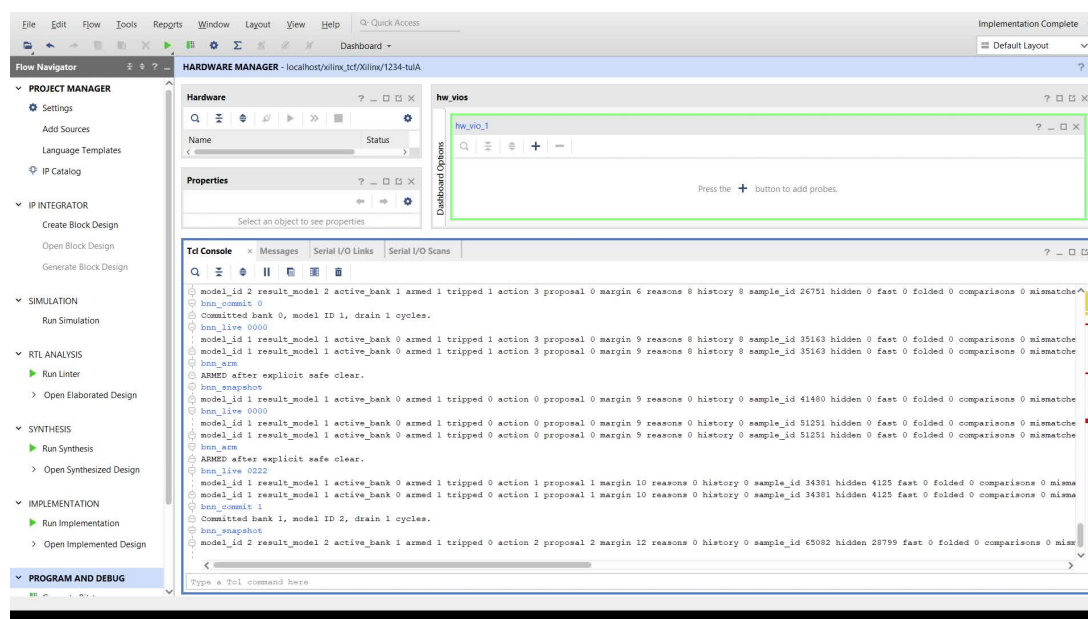

Actual Vivado screen recording: bank 1, model/result ID 2, action 2. Full resolution image and raw reports are committed.

6. Applications

Demonstrates fixed-topology model updates for small embedded policy engines and a separate interlock for emergency/stale-input handling. Two parameter banks allow runtime policy selection while retaining a rollback model. Deterministic core cycle counts and integer arithmetic support repeatable verification.

A deployment would need representative measured sensor data, interface and actuator validation, independent timing/fault analysis, and an external response to loss of the FPGA clock. The present watchdog depends on a running clock. No production or vehicle safety claim is made.

7. Conclusion

The supplied design has passed exhaustive arithmetic/core simulation, directed system/fault tests, routed timing checks and available physical FPGA verification. Main learning outcomes are pipeline/folded tradeoffs, signed integer correctness, guarded parameter updates, tagged-result freshness and latched fault recovery.

Future work: expand real sensor validation and compare power/area on additional architectures. Required Project 5 file categories, team identity and final demo link are present. Review the replacement edit and public access (VIDEO_REVIEW.md). Confirm repository naming and the organizer deadline separately.

Evidence and submission references


Results/run_20261008_121952_125/: original bitstream/debug probes, five suite PASS markers, complete Vivado batch log, timing, resource, DRC, methodology and CDC reports.

Simulation/: actual XSim transcript, earlier Icarus/reference outputs, additional waveform VCD/PNG and directed trace measurements.

Evidence/: exact recorded live Tcl log and core PASS screenshot. Documentation/DEMO_EVIDENCE.md describes the earlier recording and earlier operator observations with the original hardware CSV and both PASS exports now available in the Results run.

Documentation/CONTRACT.md, SOURCES.md and IMPLEMENTATION_CHANGES.md explain the implementation contract, references and simplified synthetic training policy. HARDWARE_GUIDE.md gives physical setup/operation instructions.

Video_Link.txt contains the replacement final Drive demo. Documentation/SUBMISSION_CHECKLIST.md maps organizer file categories; VIDEO_REVIEW.md records final content/access review status.

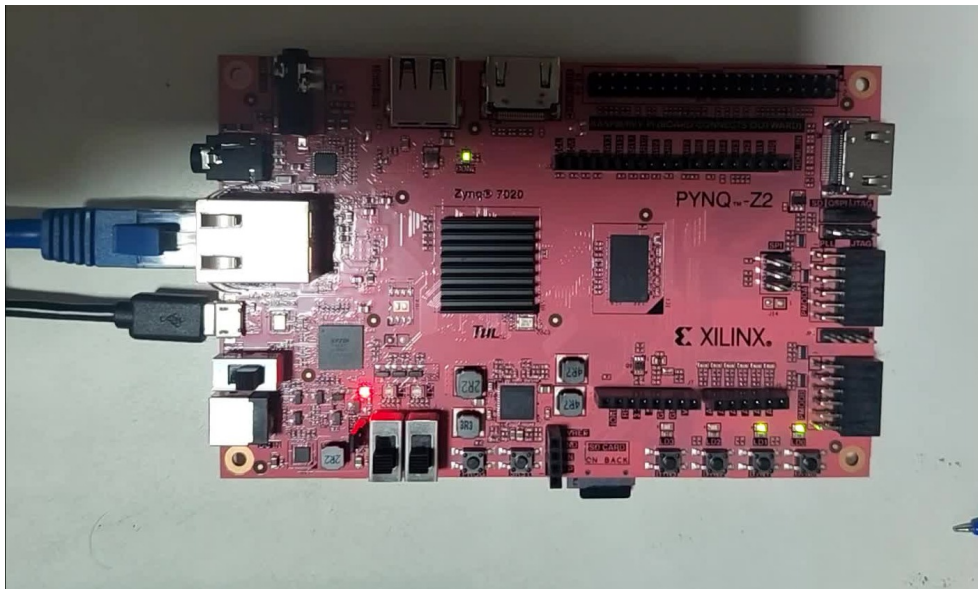

Original PYNQ-Z2 video frame, rotated for readable board labels.