

1. Description

1.1. Project

Project Name	lora_sensor
Board Name	lora_sensor
Generated with:	STM32CubeMX 4.21.0
Date	06/15/2017

1.2. MCU


MCU Series	STM32L0
MCU Line	STM32L0x3
MCU name	STM32L053C8Tx
MCU Package	LQFP48
MCU Pin number	48

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VLCD	Power		
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
11	PA1 *	I/O	GPIO_Output	LGT_GND
13	PA3	I/O	ADC_IN3	
14	PA4	I/O	ADC_IN4	
15	PA5 *	I/O	GPIO_Output	LED
16	PA6	I/O	ADC_IN6	
17	PA7	I/O	ADC_IN7	
18	PB0	I/O	ADC_IN8	
19	PB1	I/O	ADC_IN9	
22	PB11 *	I/O	GPIO_Output	RFM_RST
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Output	SPI2_CS
26	PB13	I/O	SPI2_SCK	
27	PB14	I/O	SPI2_MISO	
28	PB15	I/O	SPI2_MOSI	
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
33	PA12	I/O	GPIO_EXTI12	DIO0
34	PA13	I/O	SYS_SWDIO	
35	VSS	Power		
36	VDD_USB	Power		
37	PA14	I/O	SYS_SWCLK	
41	PB5	I/O	GPIO_EXTI5	ADC_RDY
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

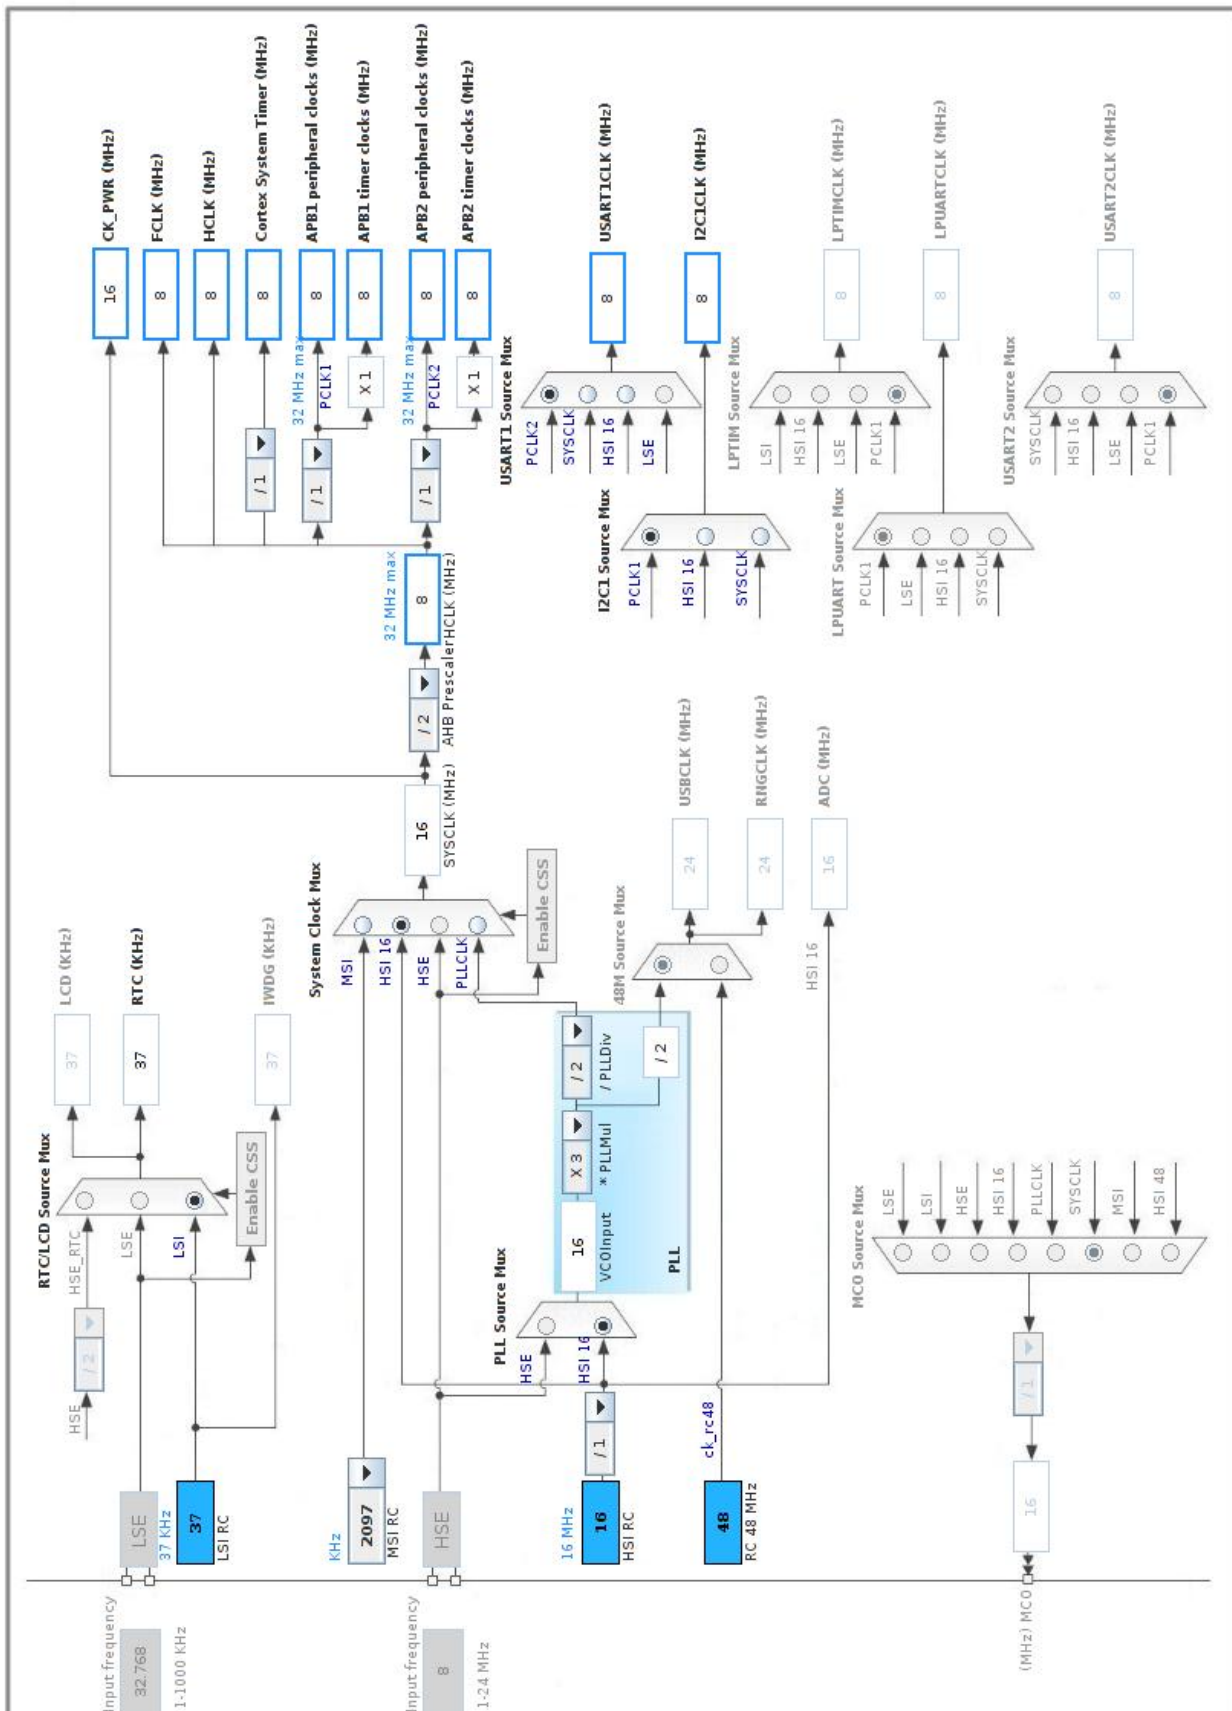

5. IPs and Middleware Configuration

5.1. ADC

mode: IN3

mode: IN4

mode: IN6

mode: IN7

mode: IN8

mode: IN9

mode: Temperature Sensor Channel

mode: Vrefint Channel

5.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	Synchronous clock mode divided by 2
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Direction	Forward
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled
Low Frequency Mode	Disabled
Auto Off	Disabled
Oversampling Mode	Disabled

ADC_Regular_ConversionMode:

Sampling Time	1.5 Cycles
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None

WatchDog:

Enable Analog WatchDog Mode	false
-----------------------------	-------

5.2. I2C1

I2C: I2C

5.2.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.3. RTC

mode: Activate Clock Source

mode: Activate Calendar

WakeUp: Internal WakeUp

5.3.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	BCD data format
Hours	0
Minutes	0
Seconds	0
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Monday
Month	January
Date	1
Year	0

Wake UP:

Wake Up Clock	1 Hz *
Wake Up Counter	0

5.4. SPI2

Mode: Full-Duplex Master

5.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	8 *
Baud Rate	1000.0 KBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.5. SYS

mode: Debug Serial Wire

Timebase Source: SysTick

5.6. USART1

Mode: Asynchronous

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC	PA3	ADC_IN3	Analog mode	No pull-up and no pull-down	n/a	
	PA4	ADC_IN4	Analog mode	No pull-up and no pull-down	n/a	
	PA6	ADC_IN6	Analog mode	No pull-up and no pull-down	n/a	
	PA7	ADC_IN7	Analog mode	No pull-up and no pull-down	n/a	
	PB0	ADC_IN8	Analog mode	No pull-up and no pull-down	n/a	
	PB1	ADC_IN9	Analog mode	No pull-up and no pull-down	n/a	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	Very High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	Very High *	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	
	PA14	SYS_SWCLK	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	Very High *	
GPIO	PA1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LGT_GND
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED
	PB11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RFM_RST
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI2_CS
	PA12	GPIO_EXTI12	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	DIO0
	PB5	GPIO_EXTI5	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ADC_RDY

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
RTC global interrupt through EXTI lines 17, 19 and 20 and LSE CSS interrupt through EXTI line 19	true	0	0
EXTI line 4 to 15 interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash and EEPROM global interrupt	unused		
RCC and CRS global interrupt	unused		
ADC1, COMP1 and COMP2 interrupts (COMP interrupts through EXTI lines 21 and 22)	unused		
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
SPI2 global interrupt	unused		
USART1 global interrupt / USART1 wake-up interrupt through EXTI line 25	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L0
Line	STM32L0x3
MCU	STM32L053C8Tx
Datasheet	025844_Rev6

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	lora_sensor
Project Folder	/home/peter/repos/solar/Mk3/stm32/lora_sensor
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_L0 V1.9.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	Yes