Qcc3084 Bluetooth Module

Download the AliExpress app

QCC3040 QCC5125 Bluetooth Audio Module EBYTE EWM104-BT3040/BT5125 Series APTX/APTX-LL/APTX-AD/APTX-HD/AAC/SBC

1 sold

SUMMER READY

Ends : **May 7, 23:59 (GMT+2)**

CHF3.74 Save CHF0.88

~~CHF4.62~~

Price includes VAT

CHF0.80 off over CHF11.99

Color: EWM104-BT3040(DAC)

AliUp

Collapse

Seller rating

96%

Price dynamics

Unfortunately, the price history is not available for this item

The seller's rating is very high, if you are determined with the choice – buy!

- The seller is at the marketplace for more than three years, perfect rate
- A high percentage of good reviews and satisfied customers (98.2%)
- The goods correspond to the description, there are practically no complaints
- Fast shipment and delivery of goods, will receive the parcel on time
- Buyers sometimes have problems in communication with the seller

Add note about seller

Customer Reviews Specifications Description Store More to love

Reviews

Related items

OCC5124/ OCC512...

Rating 96%

~~17.65~~

1 sold

LDAC lossless QCC5...

CHF**11.09**

4.8 90 sold

Choice Special offer QCC...

CHF**13.45**

5 64 sold

Free shipping over CHF

Choice Bluetooth Mo...

CHF**10.59**

5 101 sold

Free shipping over CHF

Certified Original

Brand+ Sale esp32 s3 ...

CHF**8.31**

4.8

Save CHF4.67

Top selling on AliExp

Specifications

High-concerned chemical	None	Package	SMD
Type	Module	Brand Name	EBYTE
Origin	Mainland China	Condition	New

Description

report

Rating
96%

Qualcomm QCC5125/QCC3040 Chip solution

bluetooth audio transmission module

Support high-quality audio formats such as aptX/aptX-LL/aptX-AD/aptX-HD/AAC/SBC

BLE

BLE5.2/ BLE5.1

Noise reduction and echo cancellation

High-quality audio formats such as AptX /AAC/SBC

DPS

DSP digital signal processing

Rating
96%

High quality and high performance, flexible application

bluetooth BLE5.1/BLE5.2 audio module

QCC5125 /QCC3040

The main control is developed using Qualcomm's high-performance chip solution

BLE5.1/BLE5.2

Two types of bluetooth BLE5.1/BLE5.2 audio modules

120 MHz

Qualcomm® Kalimba™ audio DSP

Support aptX, aptX HD

Can output CD-level sound quality, truly reproduce the full audio bandwidth

ANC、ECNS

Integrated active noise reduction (ANC) technology and echo cancellation and noise suppression (ECNS) technology

Differential headphone output mode

Differential headphone output mode, supports AB class, D Category

Rating
96%

Parameter comparison table

Product model	EWM104-BT5125 Series	EWM104-BT3040 Series
Chip model	QCC5125	QCC3040
bluetooth version	BLE5.1	BLE5.2
Size	13*18mm	13*18mm
Power supply voltage	2.8~4.6V@VBAT	3.0~4.6V@VBAT
Transmit power	9dBm	10dBm
Communication distance	120m(Open area, clear weather)	220m(Open area, clear weather)
Communication interface	USB	USB
Antenna interface	Stamp hole	Stamp hole
Mono/Stereo	Stereo	Mono
CPU	32MHz	32MHz
DSP	120 MHz Qualcomm® Kalimba™ audio DSP	120 MHz Qualcomm® Kalimba™ audio DSP
aptX	√	√
aptX-LL	√	×
aptX-HD	√	√
aptX-adaptive	√	√
ANC	1.0	2.0
TWS	√	×
Broadcast	√	×
CVC	Headset/handsfree	Headset
*Note: The blue font part requires a license		

Rating
96%

Supports CVC noise reduction technology

CVC noise reduction technology reduces background noise and improves voice clarity through algorithm processing

Rating
96%

APTX

Digital compression algorithm based on SB-ADPCM technology

- ✓ Supports aptX audio technology that provides CD-level sound quality via bluetooth connection
- ✓ Can listen to aptX quality audio technology while watching videos

Rating
96%

APT-X LL low-latency transmission

APT-X LL is suitable for low-latency application scenarios such as video chat and games

APT-X LL low-latency transmission:



Normal transmission:

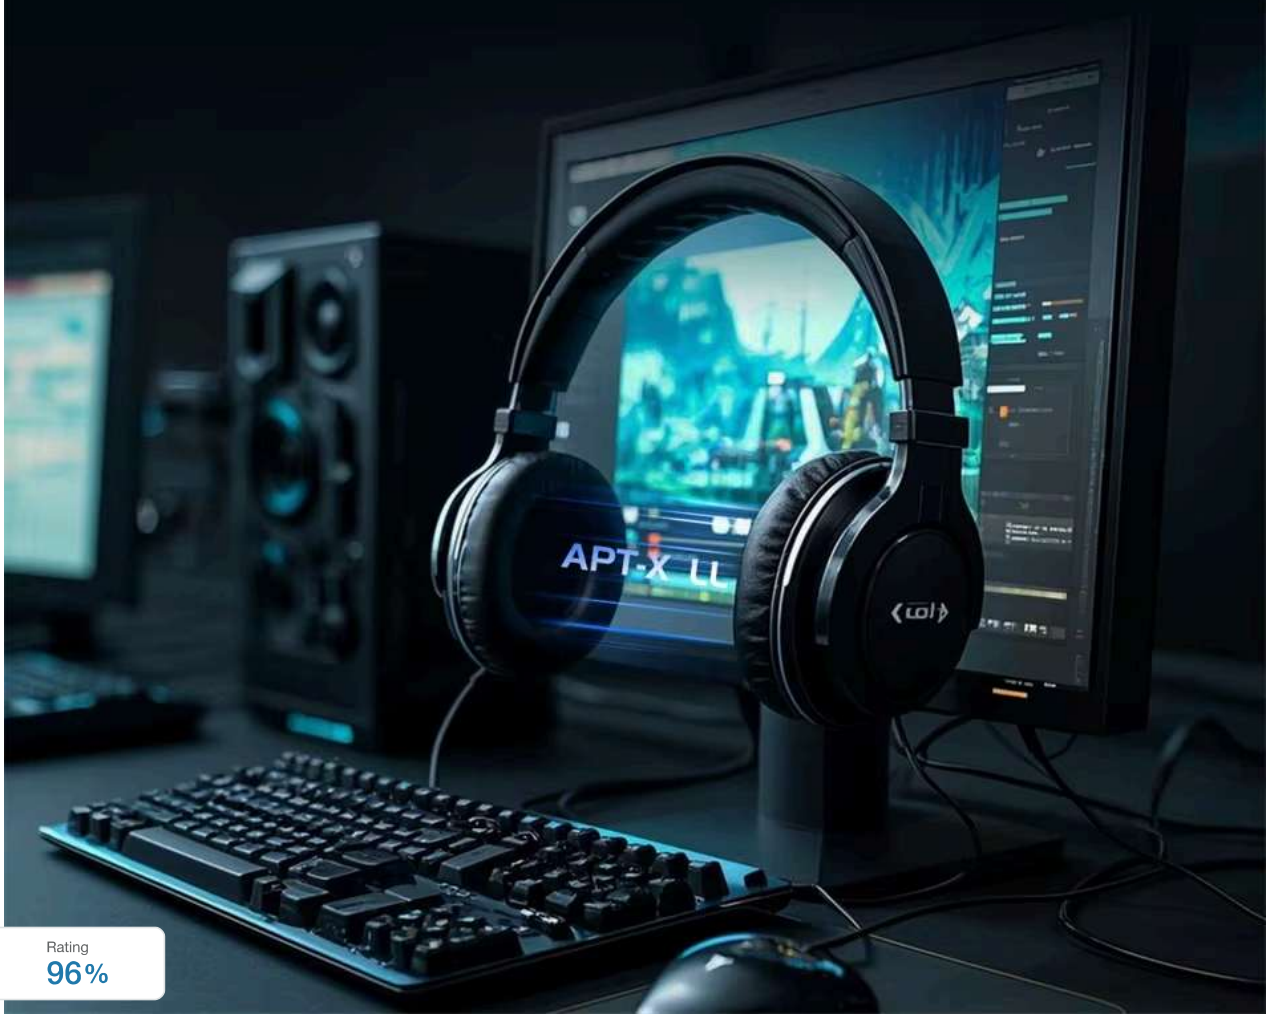

Rating
96%

Support multiple interface options

The two series modules, EWM104-BT5125(xxx) and EWM104-BT3040(xxx),support a variety of different output interfaces to meet users' application needs in various scenarios.

I2S

Commonly used between audio codecs, digital signal processors, audio controllers and other chips, and also used for audio data transmission within some embedded systems, consumer electronics, car audio systems, and professional audio equipment

DAC

It is widely used in various devices that need to convert digital audio into analog audio, such as headphone amplifiers, sound systems, bluetooth audio receivers, etc.

SPDIF

It is commonly used to connect devices with digital audio output, such as CD/DVD players, Blu-ray players, TVs, computers, etc., and to transmit digital audio signals with external audio decoders, amplifiers, home theater systems and other devices

Rating
96%

systems and other devices.

Longer communication distance

Transmitting power 10dBm, the test distance is 220 meters in open area under clear weather conditions

Rating
96%

Small size,
easier to integrate
25mm
YI
YUAN
元
2000
18.0±0.2mm
13±0.2mm
EWM104-BT5125
EBYTE
Version:D
Manufacturer: EBYTE
SN: XXXXXXXXXXXXX
EWM104-BT5125(xxx)
18.0±0.2mm
13±0.2mm
EWM104-BT3040
EBYTE
Version:D
Manufacturer: EBYTE
SN: XXXXXXXXXXXXX
EWM104-BT3040(xxx)

Rating
96%

Test baseboard

EWT104-DA10 integrates multiple hardware interfaces, convenient for customers to develop and use

- Standard TYPE-C interface, plug and play
- Integrated left and right channel microphones
- Support AUX audio input/output interface
- Integrated left and right channel speaker interface
- The factory default does not come with modules, customers can choose related modules according to their needs.

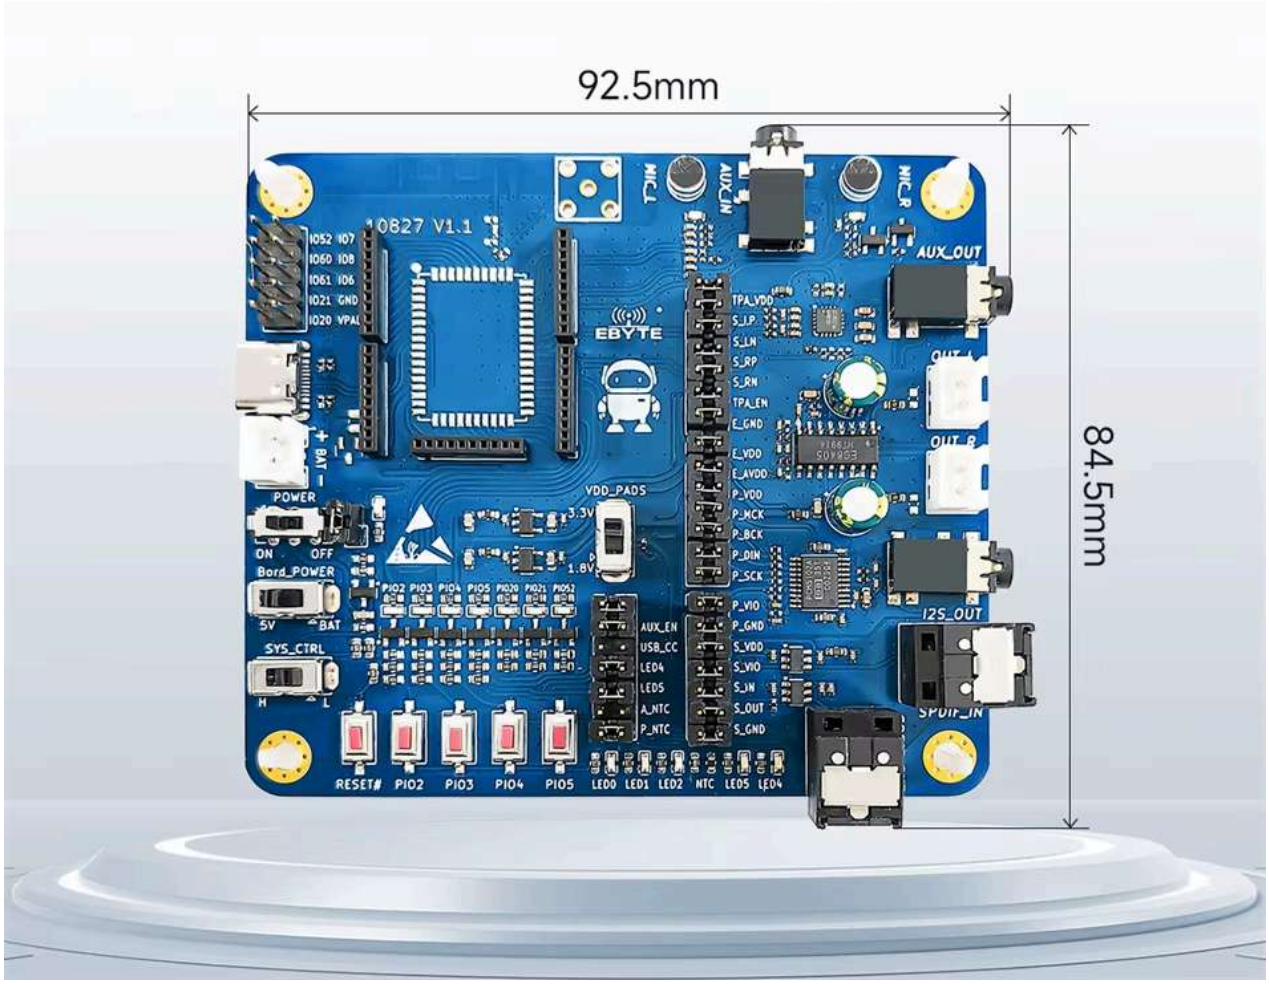

Rating
96%

Pin definition

EWM104-BT5125(DAC)、EWM104-BT5125(I2S)、EWM104-BT5125(SPDIF)

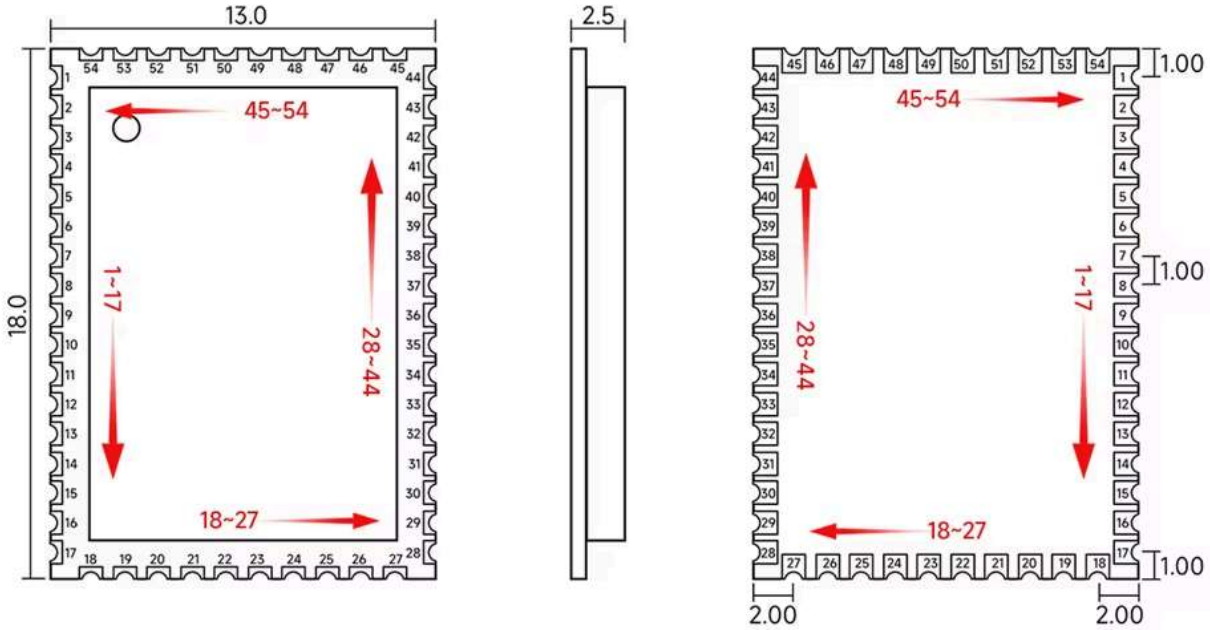

Top pad :



Bottom pad :



Unit : mm
Pad quantity : 54
Tolerance value : X.X±0.2mm
X.XX±0.05mm

Rating
96%

Serial number	Pin name	Pin direction	Pin purpose
1	NC	-	
2	SPDIF_IN/PIO[19]	I/O	SPDIF optical audio data input、PIO[19]
3	I2S_SDATA/SPDIF_OUT/PIO[18]	I/O	I2S bit data output, SPDIF optical audio data output 、PIO[18]
4	I2S_LRCK/PIO[17]	I/O	I2S frame clock output, PIO[17]
5	I2S_SCK/PIO[16]	I/O	I2S bit clock output、PIO[16]
6	I2S_MCLK/PIO[15]	I/O	I2S system clock output、PIO[15]
7	VBAT_SENSE	Analog	Battery voltage detection
8	USB_DN	-	Full-speed USB interface DN
9	USB_DP	-	Full-speed USB interface DP
10	VCHG	P	Internal power regulator and charger voltage input, 4.0~6.5V
11	VCHG_SENSE	Analog	Charger input voltage detection pin, when using the internal charger or no charger, this pin is connected to the VCHG pin.
12	CHG_EXT	Analog	External charger transistor current control
13	SYS_CTRL/PIO[0]	I	Typically connected to an on/off button. Powers up the device by pressing the button when the battery and/or charger still has power, but the software has put the device in a powered-down or dormant state. Also functions as a PIO[0] digital input in normal operation.
14	VBAT	P	Battery power input, 2.8~4.6V
15	GND	G	GND
16	AIO[0]/LED[0]	Analog/DO	Analog/digital input, open-drain LED output, for LED function, please refer to the LED function indication diagram below
17	AIO[1]/LED[1]	Analog/DO	Analog/digital input, open-drain LED output, for LED function, please refer to the LED function indication diagram below
18	AIO[2]/LED[2]	Analog/DO	Analog/digital input, open-drain LED output, for LED function, please refer to the LED function indication diagram below
19	AIO[4]/LED[4]	Analog/DO	Analog/digital input, open-drain LED output
20	AIO[5]/LED[5]	Analog/DO	Analog/digital input, open-drain LED output
21	GND	-	GND
22	1V8	P	1.8V power output
23	VDD_PADS1	P	1.8V/3.3V PIO voltage input
24	VDD_PADS3_7	P	1.8V/3.3V PIO voltage input
25	PIO[4]	I/O	Button, PIO[4], short press to play the previous song, long press to connect to bluetooth, user programmable
26	PIO[3]	I/O	Button, PIO[3], short press to pause playback, long press to reduce volume, user programmable
27	PIO[6]	I/O	PIO[6]
28	PIO[5]	I/O	Button, PIO[5], short press to play the next song, long press to disconnect bluetooth, user programmable
29	PIO[8]	I/O	PIO[8]
30	PIO[7]	I/O	PIO[7]
31	PIO[2]	I/O	Button, PIO[2], short press to play, long press to increase volume, user programmable
[illegible]	PIO[1]	I/O	Reset、PIO[1]
33	NC	-	

Rating
96%

34	SPK-RN	Analog	DAC audio differential output right channel negative
35	SPK-RP	Analog	DAC audio differential output right channel positive
36	SPK-LN	Analog	DAC audio differential output left channel negative
37	SPK-LP	Analog	DAC audio differential output left channel positive
38	GND		GND
39	MIC_BIAS	Analog	Microphone bias voltage output, 1.5~2.1V
40	MIC2_N	Analog	Microphone audio differential input 2 negative
41	MIC2_P	Analog	Microphone audio differential input 2 Positive
42	MIC1_N	Analog	Microphone audio differential input 1 negative
43	MIC1_P	Analog	Microphone audio differential input 1 positive
44	GND	-	GND
45	GND	-	GND
46	ANT	-	bluetooth antenna interface
47	GND	-	GND
48	PIO[54]	I/O	PIO[54]
49	PIO[53]	I/O	AUX audio input insertion detection、PIO[53]
50	PIO[52]	I/O	LED indicator, PIO[52], customer programmable
51	PIO[60]	I/O	PIO[60]
52	PIO[61]	I/O	PIO[61]
53	PIO[21]	I/O	LED indicator, PIO[21], customer programmable
54	PIO[20]	I/O	Audio amplifier enable、PIO[20]

"Special note:
The above pin function description is only for the default program function when our company ships. If you need other functions, please contact our company for customization. If you want to develop pin functions yourself, please refer to the official user manual of QCC5125."

Rating
96%

EWM104-BT3040(DAC)、EWM104-BT3040(I2S)

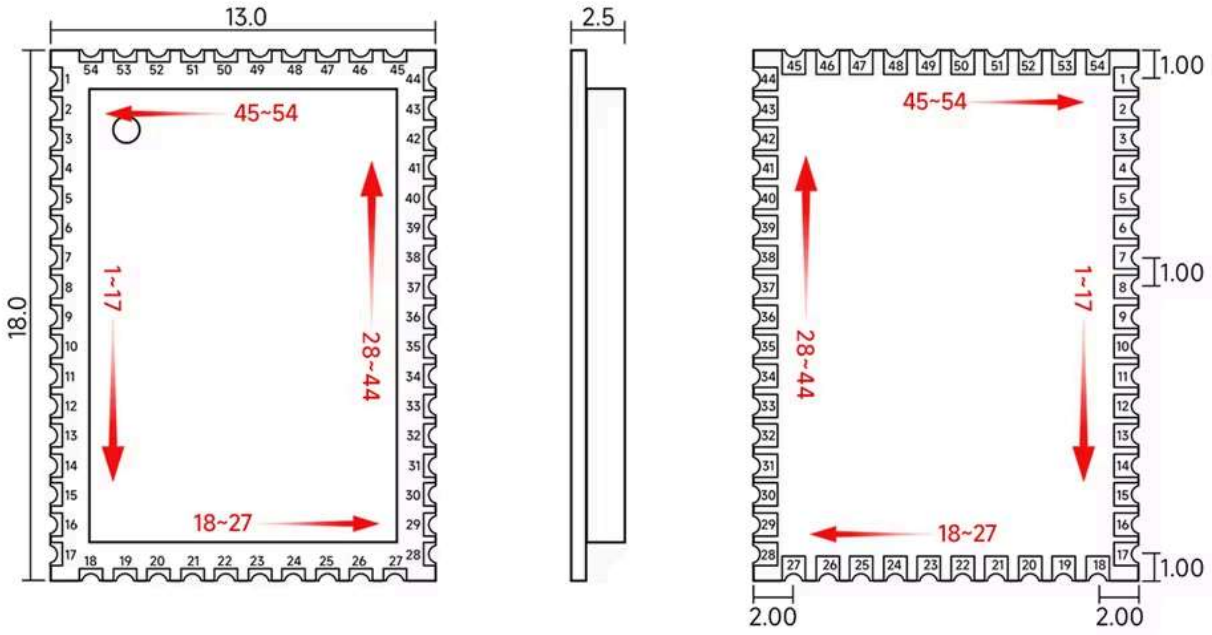

Top pad :



Bottom pad :



Unit : mm
Pad quantity : 54
Tolerance value : X.X±0.2mm
X.XX±0.05mm

Rating
96%

Serial number	Pin name	Pin direction	Pin purpose
1	PIO[20]	I/O	Programmable I/O port 20, other functions: PCM_DOUT1
2	PIO[19]	I/O	PIO[19]
3	PIO[18]	I/O	I2S bit data output、PIO[18]
4	PIO[17]	I/O	I2S frame clock output、PIO[17]
5	PIO[16]	I/O	I2S bit clock output、PIO[16]
6	PIO[15]	I/O	I2S system clock output、PIO[15]
7	VBAT_SENSE	Analog	Battery voltage detection
8	USB_DN	-	Full-speed USB interface DN
9	USB_DP	-	Full-speed USB interface DP
10	VCHG	P	Internal power regulator and charger voltage input, 4.0~6.5V
11	VCHG_SENSE	Analog	Charger input voltage detection pin, this pin is connected to VCHG pin when using internal charger or no charger.
12	CHG_EXT	Analog	External charger transistor current control.
13	SYS_CTRL	I	Usually connected to a switch button PIO[0], in the out-of-box state, the rising edge is in power_on mode, the falling edge is in power_off mode, and the power-on automatically enters the pairing state
14	VBAT	P	Battery power input, 3.0~4.6V，3.0~4.6V
15	GND	G	GND
16	LED[0]	Analog/DO	Analog/digital input, open-drain LED output. Flashes alternately with LED1 in pairing state
17	LED[1]	Analog/DO	Analog/digital input, open-drain LED output. Flashes alternately with LED0 in pairing state, and stays on after connecting to bluetooth
18	LED[2]	Analog/DO	Analog/digital input, open-drain LED output
19	LED[4]	Analog/DO	Analog/digital input, open-drain LED output
20	LED[5]	Analog/DO	Analog/digital input, open-drain LED output
21	GND	-	GND
22	1V8	P	1.8V power output
23	VDD_PADS1	P	1.8V/3.3V PIO voltage input
24	VDD_PADS3	P	1.8V/3.3V PIO voltage input
25	PIO[4]	I/O	Short press for next song, long press for volume up (need to be out of the warehouse + media playing conditions), user programmable
26	PIO[3]	I/O	Short press for previous song, long press for volume down (need to be out of the warehouse + media playing conditions), user programmable
27	PIO[6]	I/O	PIO[6]
28	PIO[5]	I/O	Available in the out-of-box state, short press LED0, LED1, LED2 flash, user programmable
29	PIO[8]	I/O	PIO[8]
30	PIO[7]	I/O	PIO[7]
[illegible]	PIO[2]	I/O	PIO[2], short press to pause, long press for 3 seconds to enter pairing, long press for 6 seconds to clear the pairing list, user programmable
[illegible]	RESET/PIO[1]	I/O	Reset、PIO[1]
[illegible]	[illegible]	[illegible]	[illegible]

Rating
96%

33	PIO[60]	I/O	PIO[60]
34	NC	-	-
35	NC	-	-
36	SPK-LN	Analog	DAC audio differential output left channel negative
37	SPK-LP	Analog	DAC audio differential output left channel positive
38	GND	-	GND
39	MIC_BIAS	Analog	Microphone bias voltage output, 1.5~2.1V
40	MIC2_N	Analog	Microphone differential input right channel negative, not used by default firmware, user programmable
41	MIC2_P	Analog	Microphone differential input right channel positive, not used by default firmware, user programmable
42	MIC1_N	Analog	Microphone differential input left channel negative, not used by default firmware, user programmable
43	MIC1_P	Analog	Microphone differential input left channel positive, not used by default firmware, user programmable
44	GND	-	GND
45	GND	-	GND
46	RF_PORT	-	bluetooth antenna interface
47	GND	-	GND
48	PIO[14]	I/O	PIO[14]
49	PIO[13]	I/O	PIO[13]
50	PIO[12]	I/O	PIO[12]
51	PIO[11]	I/O	PIO[11]
52	PIO[10]	I/O	PIO[10]
53	PIO[09]	I/O	PIO[09]
54	PIO[21]	I/O	PIO[21]、Audio amplifier enable, customer programmable

Special note:
The above pin function description is only for the default program function when our company ships. If you need other functions, please contact our company for customization. If you want to develop pin functions yourself, please refer to the official user manual of QCC3040.

Rating
96%

EWT104-DA10

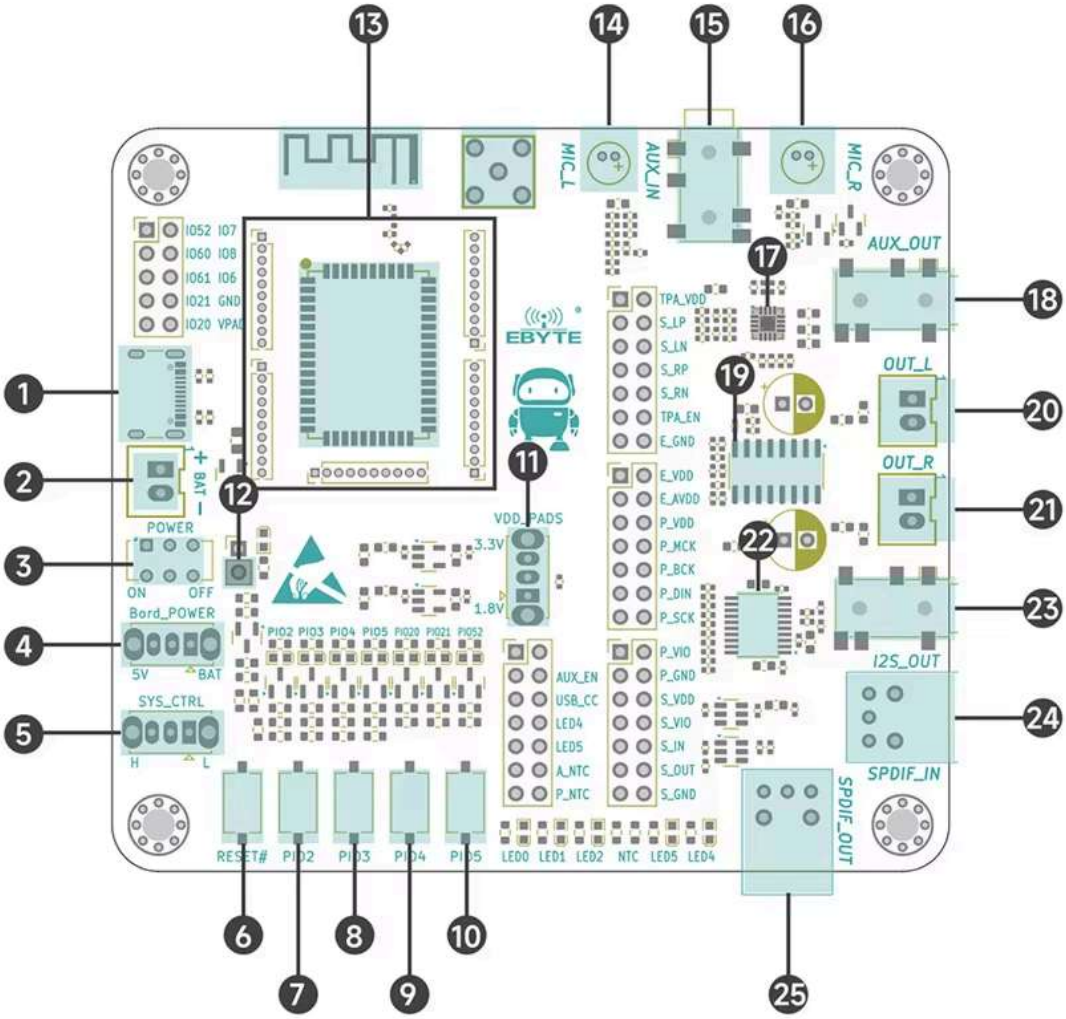

Rating
96%

Serial number	Definition	Function description
1	USB_IN	Baseboard 5V power supply, connected to the USB port of EWM104-BT5125
2	Battery connector	Battery input port, connected to the VBAT of EWM104-BT5125
3	Power switch	Baseboard power main switch, toggle to ON to turn on the power, toggle to OFF to turn off the power
4	Baseboard power supply mode selection switch	Switch the power supply mode of the resources on the baseboard. Toggle to 5V to select USB to power the baseboard resources. Toggle to BAT to select battery to power the baseboard resources.
5	KEY_SYS_CTRL	Default is module power on/off control, user programmable
6	KEY_RESET	Module reset control button, press to reset
7	KEY_PIO2	Default is module play/volume plus button, user programmable
8	KEY_PIO3	Default is module pause/play/volume minus button, user programmable
9	KEY_PIO4	Default is module previous song/pairing button, user programmable
10	KEY_PIO5	Default is module next song/disconnect button, user programmable
11	IO voltage switch	Used to switch module VDD_PADS and on-board digital IO power supply voltage, switch to 3.3V for 3.3V power supply, switch to 1.8V for 1.8V power supply
12	Module power supply jumper	Used to measure module operating current
13	1.27mm pitch female header	EWT104-QC01Z installation position
14	MIC_L	Left channel microphone
15	AUX_IN	AUX audio input interface, can be inserted into a 3.5mm three-stage plug, with insertion detection and path switching. After inserting the 3-stage 3.5mm plug, the microphone power supply will be disconnected and the module audio input channel will switch to AUX_IN. After unplugging the 3-stage 3.5mm plug, the microphone power supply is turned on and the module audio input channel is switched to the microphone
16	MIC_R	Right channel microphone
17	Stereo headphone amplifier	Stereo headphone amplifier, input connected to the module AUX output, output connected to the AUX_OUT interface
18	AUX_OUT	AUX_OUT interface, can be inserted with 3.5mm three-stage or four-stage plug, with path switching, when no 3.5mm plug is inserted, the audio signal output value is 3W stereo amplifier, when a 3-stage 3.5mm plug is inserted, the audio signal is output to the AUX_OUT interface
19	3W stereo power amplifier	Stereo amplifier with 3W output power, input connected to stereo headphone amplifier and audio stereo DAC, output connected to left and right channel speaker interface
20	OUT_L	Left channel speaker interface
21	OUT_R	Right channel speaker interface
22	Audio stereo DAC	Audio stereo DAC with I2S interface, input connected to the module's I2S interface, output connected to I2S_OUT
23	I2S_OUT	AUX_OUT interface, can be inserted into 3.5mm three-segment or four-segment plug, with path switching, when no 3.5mm plug is inserted, the audio signal output value is 3W stereo amplifier, when a 3-segment 3.5 mm plug is inserted, the audio signal is output to the I2S_OUT interface
24	SPDIF_IN	Optical fiber audio input interface
25	SPDIF_OUT	Optical fiber audio output interface

Rating
96%

Sold by EBYTE Module Store, processed by EBYTE Module Store

Product compliance information ›

Rating
96%

YTE Module Store

% Positive Feedback | **3525** Followers

Recommended from EBYTE Module Store ›

Allwinner T527/A527 Single B...
CHF123.69 ~~CHF137.43~~ -9%

T527 Core Board Multi-core H...
CHF82.39 ~~CHF91.54~~ -9%
5 1 sold

Sale Data Transmission Radio ...
CHF54.99
5 24 sold
Save CHF13.75

STM32MP135 Single Board C...
CHF60.39 ~~CHF67.1~~ -10%
5 7 sold

230MHz LoRa Wireless N
CHF49.39
9 sold

More to love

APP name change password E...
CHF8
5 164 sold

LDAC lossless QCC5125 Blue...
CHF8.71 ~~CHF9.68~~ -10%
4.2 91 sold

supports Android APP EQ DS...
CHF6.99
4.7 49 sold

BTM344 QCC3044 Bluetooth...
CHF9.89

Brand+ Sale 5GHz ESP32
CHF6.53
4.8 428 sold
Save CHF0.64
Top selling on AliExpre

Ad

Brand+ Sale esp32 s3 lora Mes...
CHF8.31
4.8 3,000+ sold
Save CHF4.67
Top selling on AliExpress

QCC5181/QCC3095 Bluetoo...
CHF16.99 ~~CHF19.99~~ -15%
20 sold

2/6PCS RC Drone Accessorie...
CHF1.99 ~~CHF2.97~~ -33%
4.9 250 sold
Best price in similar deals

Brand+ Sale ReSpeaker Lite Voi...
CHF24.59
4.9 700+ sold
Save CHF17.81

BTM334 QCC3034 Bluet
CHF7.59 ~~CHF7.99~~ -5%
5 30 sold

Ad

Rating
96%

nRF52840 &...

Choice ATGM336H GPS+BDS ...

Brand+ Sale FNIRSI HS-02 Adj...

Sale 2 pcs Electrochemical TV...

Feasycom FSC-BT1026D