

Lab 10 – Encoding and Decoding Touch-Tone (DTMF) Signals*

EE252L/CE251L: Signals and Systems Lab (Open Ended Lab)

Dr. Basit Memon and Ms. Hira Mustafa

Name: _____

Objectives

By the end of this lab, you will be able to encode and decode the DTMF signals on MATLAB.

Instructions: After completion of each task get it marked by sharing your results and code with any of the RA, your code must be self-explanatory i.e. use proper comments. *Attach rubrics at the end of your report.*

1 Introduction

This lab introduces a practical application where sinusoidal signals are used to transmit information: a touch-tone dialer. Bandpass FIR filters can be used to extract the information encoded in the waveforms. The goal of this lab is to design and implement bandpass FIR filters in MATLAB, and to do the decoding automatically. In the experiments of this lab, you will use `firfilt()`, or `conv()`, to implement filters and `freqz()` to obtain the filter's frequency response.¹ As a result, you should learn how to characterize a filter by knowing how it reacts to different frequency components in the input.

1.1 Background: Telephone Touch Tone Dialing

Telephone touch-tone¹ pads generate dual tone multiple frequency (DTMF) signals to dial a telephone. When any key is pressed, the sinusoids of the corresponding row and column frequencies (in Fig. 1) are generated and summed, hence dual tone. As an example, pressing the 5 key generates a signal containing the sum of the two tones at 770 Hz and 1336 Hz together. The frequencies in Figure 1 were chosen (by the design engineers) to avoid harmonics. No

*Adapted from DSP First, 2e

¹Touch Tone is a registered trademark

frequency is an integer multiple of another, the difference between any two frequencies does not equal any of the other frequencies, and the sum of any two frequencies does not equal any of the other frequencies. This makes it easier to detect exactly which tones are present in the dialed signal in the presence of non-linear line distortions.

FREQS	1209 Hz	1336 Hz	1477 Hz	1633 Hz
697 Hz	1	2	3	A
770 Hz	4	5	6	B
852 Hz	7	8	9	C
941 Hz	*	0	#	D

Figure 1: Extended DTMF encoding table for Touch Tone dialing. When any key is pressed the tones of the corresponding column and row are generated and summed. Keys A-D (in the fourth column) are not implemented on commercial and household telephone sets, but are used in some military and other signaling applications.

1.2 DTMF Decoding

There are several steps to decoding a DTMF signal:

1. Divide the time signal into short time segments representing individual key presses.
2. Filter the individual segments to extract the possible frequency components. Bandpass filters can be used to isolate the sinusoidal components.
3. Determine which two frequency components are present in each time segment by measuring the size of the output signal from all of the bandpass filters.
4. Determine which key was pressed, 0–9, A–D, *, or # by converting frequency pairs back into key names according to Figure 1.

It is possible to decode DTMF signals using a simple FIR filter bank. The filter bank in Figure 2 consists of eight band-pass filters, such that each of them passes through only one of the eight possible DTMF frequencies. The input signal for all the filters is the same DTMF signal.

Here is how the system should work: When the input to the filter bank is a DTMF signal, the outputs from two of the bandpass filters (BPFs) should be larger than the rest. If we detect (or measure) which two outputs are the large ones, then we know the two corresponding frequencies. These frequencies are then used as row and column pointers to determine the key from the DTMF code. A good measure of the output levels is the peak value at the filter outputs, because when the BPF is working properly it should pass only one sinusoidal signal and the peak value would be the amplitude of the sinusoid passed by the filter. More discussion of the detection problem can be found in the last task.

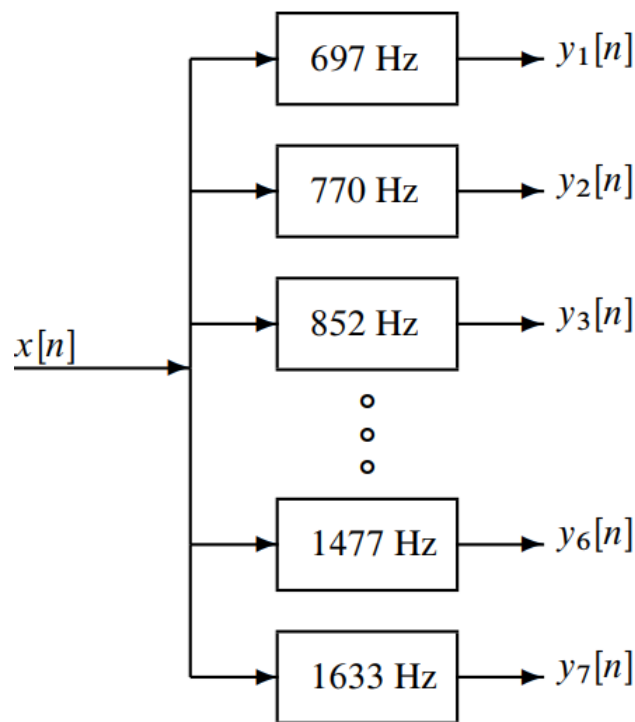


Figure 2: Filter bank consisting of bandpass filters (BPFs) which pass frequencies corresponding to the eight DTMF component frequencies listed in Figure 1. The number in each box is the center frequency of the BPF.

1.3 MATLAB Implementation

The DTMF system consists of functions to generate DTMF signals and functions to decode them. Some of the necessary functions have been implemented, while others will be constructed as part of this lab. A summary of the necessary files is as follows:

- `dtmfdial.m` – This function implements a DTMF dialer based on the frequency table defined in Figure 1. This function generates 0.05 seconds of silence followed by 0.2 seconds of tone for each key given in a text string argument. For instance, to generate the tones corresponding to the numbers 123, after writing your function store the data in the vector `xx`, and listen to the result, type:

```

keyNames=['1' '2' '3'];
[xx]=dtmfdial(keyNames, 8000);
sound(xx, 8000);

```

Any length text string can be given as the input.

- `dtmfcut.m` – This function parses a DTMF sound file, indicating the start and stop indexes of each individual set of tone bursts. The function is called as `[nstart, nstop]=dtmfcut(xx, fs)`, where `nstart` and `nstop` are vectors containing the start and stop indexes of each DTMF burst. For instance, to place all the DTMF segments in individual vectors, you can use:

```

[nstart,nstop] = dtmfcut(xx,fs); % Find the beginning and end of tone bursts
for kk=1:length(nstart)
    indx = [(nstart(kk):nstop(kk))]; % seg. indices
    x_seg(kk,[1:length(indx)])=xx(indx); %Extract one DTMF tone
end

```

This function is implemented and can be downloaded from LMS.

- `dtmfdesign.m` – This function computes the impulse responses for all of the bandpass filters shown in Figure 2. The impulse responses will be used to filter the DTMF signal and isolate individual sinusoids. This function must be constructed as part of this lab. More details on the arguments and structure of this function are given below.
- `dtmfscore.m` – This function will be used to indicate if a specific sinusoid is present in a DTMF signal segment. Given a DTMF segment and the impulse responses for a specific bandpass filter, it will return a binary decision indicating if there is a sinusoid, with frequency equal to the center frequency of the bandpass filter defined by the impulse response, present in the DTMF segment. This function must be constructed as part of this lab. More details on the arguments and structure of this function are given below.
- `dtmfrun.m` – This final function returns a text string corresponding to the keys represented in the DTMF signal. It will utilize the other provided and written functions. This function must be constructed as part of this lab. As with the other functions you must construct, more details on the arguments and structure of the function are given below.

Task 1- Warm-up: Encoding from a Table

1. Explain how the following program uses frequency information stored in a table to generate a long signal via concatenation.
2. Determine the size of the table and all of its entries, and then state the playing order of the frequencies.
3. Determine the total length of the signal played by the soundsc function. How many samples and how many seconds?

```
ftable = [1;2;3;4;5]*[80,110]
fs = 8000; xx = [ ];
keys = rem(3:12,10) + 1;
for ii = 1:length(keys)
    kk = keys(ii);
    xx = [xx,zeros(1,400)];
    krow = ceil(kk/2);
    kcol = rem(kk-1,2) + 1;
    dur=0.15;
    t=0:1/fs:dur;
    xx = [xx, cos(2*pi*ftable(krow,kcol)*t)];
end
soundsc(xx,fs);
```

Tip: For better understanding run the code line by line and see the results on command window.

2 Creating Function in MATLAB

To learn how to write function in MATLAB, refer 'Creating function' document on LMS.

3 DTMF Synthesis

```
function xx = dtmfdial(keyNames,fs)
%DTMFDIAL Create a signal vector of tones which will dial
% a DTMF (Touch Tone) telephone system.
%
% usage: xx = dtmfdial(keyNames,fs)
% keyNames = vector of characters containing valid key names
% fs = sampling frequency
% xx = signal vector that is the concatenation of DTMF tones.
dtmf.keys = ...
['1','2','3','A';
 '4','5','6','B';
 '7','8','9','C';
 '*', '0', '#', 'D'];
dtmf.colTones = ones(4,1)*[1209,1336,1477,1633];
dtmf.rowTones = [697;770;852;941]*ones(1,4);
%This is an incomplete function
%----Write your code here-----
```

Given above is the skeleton of dtmfdial.m, a DTMF phone dialer.

Task 2-DTMF Dial Function

Write a function, `dtmfdial.m`, to implement a DTMF dialer based on the frequency table defined in Figure 1. A skeleton of `dtmfdial.m` is given above. In this warm-up, you must complete the dialing code with additional lines of code, so that it implements the following:

1. The input to the function is a vector of characters, each one being equal to one of the key names on the telephone. The MATLAB structure called `dtmf` contains the key names in the field `dtmf.keys` which is a 4x4 array that corresponds exactly to the keyboard layout in Fig. 1.
2. The output should be a vector of samples with sampling rate `fs= 8000 Hz` containing the DTMF tones, one tone pair per key. Remember that each DTMF signal is the sum of a pair of (equal amplitude) sinusoidal signals. The duration of each tone pair should be exactly 0.20 sec., and a silence, about 0.05 sec. long, should separate the DTMF tone pairs. These times can be declared as fixed code in `dtmfdial`. (You do not need to make them variable in your function.)
3. The frequency information is given as two 4x4 matrices (`dtmf.colTones` and `dtmf.rowTones`): one contains the column frequencies, the other has the row frequencies. You can translate a key such as the 6 key into the correct location in these 4x4 matrices by using MATLAB's `find` function. For example, the key 6 is in row 2 and column 3, so we would generate sinusoids with frequencies equal to `dtmf.colTones(2,3)` and `dtmf.rowTones(2,3)`. To convert an key name to its corresponding row-column indices, consider the following example:

`[ii,jj] = find('3'==dtmf.keys).`

Also, consult the MATLAB code in Task 1 above and modify it for the 4x4 tables in `dtmfdial.m`.

4 Band-pass Filter

A band pass filter allows frequencies within a specific frequency range and rejects (attenuates) frequencies outside that range. Its passband width is controlled by L , being inversely proportional to L . It is also possible to create a filter whose passband is centered around some frequency other than zero. One simple way to do this is to define the impulse response of an L -point FIR as:

$$h[n] = \beta \cos(\omega_c n), 0 \leq n < L$$

where L is the length of the filter and ω_c is the center frequency for the pass-band. For example, we pick $\omega_c = 0.2\pi$ if we want the peak of the filter's passband to be centered at 0.2π . Also, it is possible to choose β so that the maximum value of the frequency response magnitude will be one. The bandwidth of the bandpass filter is controlled by L ; the larger the value of L , the narrower the bandwidth. You are familiar with its designing as done previously.

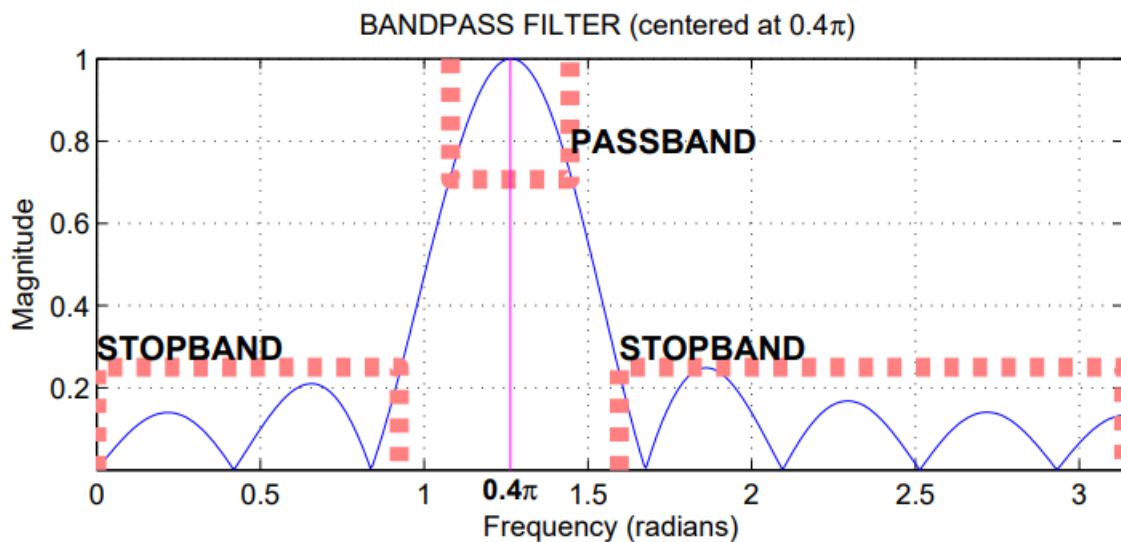


Figure 3: The frequency response of an FIR bandpass is shown with its passband and stopband regions.

Task 3: Band pass filter

A simple bandpass filter design method is presented in which the impulse response of the FIR filter is simply a finite length cosine of the form:

$$h[n] = \beta \cos\left(\frac{2\pi f_b n}{f_s}\right), 0 \leq n \leq L - 1$$

where L is the filter length, and f_s is the sampling frequency. The constant β gives flexibility for scaling the filter's gain to meet a constraint such as making the maximum value of the frequency response equal to one. The parameter f_b defines the frequency location of the passband, e.g., we pick $f_b = 852$ if we want to isolate the 852 Hz component. The bandwidth of the bandpass filter is controlled by L ; the larger the value of L , the narrower the bandwidth.

1. Write a function `B=maxbeta(L,fb,fs)` in which you will devise a MATLAB strategy for picking the constant β so that the maximum value of the **frequency response** will be equal to one. Write the one or two lines of MATLAB code that will do this scaling operation in general.
Hint: Let MATLAB measure the peak value of the unscaled frequency response (without β), and then have MATLAB compute β to scale the peak to be one.
2. Test your function for $f_b = 852$, $L = 51$ and $f_s = 8000$.

5 DTMF Decoding

A DTMF decoding system needs two pieces: a set of bandpass filters (BPF) to isolate individual frequency components, and a detector to determine whether or not a given component is present. The detector must “score” each BPF output and determine which two frequencies are most likely

to be contained in the DTMF tone. In a practical system where noise and interference are also present, this scoring process is a crucial part of the system design, but we will only work with noise-free signals to understand the basic functionality in the decoding system.

To make the whole system work, you will have to write three M-files: `dtmfrun`, `dtmfscor` and `dtmfdesign`. An additional M-file called `dtmfcut` is contained in the ZIP archive Lab11. The main M-file should be named `dtmfrun.m`. It will call `dtmfdesign.m`, `dtmfcut.m`, and `dtmfscor.m`.

Following is the skeleton of `dtmfdesign.m` function.

```
function hh = dtmfdesign(fb, L, fs)
%DTMFDESIGN
% hh = dtmfdesign(fb, L, fs)
% returns a matrix (L by length(fb)) where each column contains
% the impulse response of a BPF, one for each frequency in fb
% fb = vector of center frequencies
% L = length of FIR bandpass filters
% fs = sampling freq
%
% Each BPF must be scaled so that its frequency response has a
% maximum magnitude equal to one.

%This is an incomplete function
%----Write your code here-----
```

Task 4: Simple Bandpass Filter Design: `dtmfdesign.m`

1. Using the skeleton of the `dtmfdesign.m` function provided above, complete this function with additional lines of code. This function should produce all eight(8) bandpass filters needed for the DTMF filter bank system. Store the filters in the columns of the matrix `hh` whose size is $L \times 8$. Here you will use the `maxbeta` function already created in task 3, which gives the maximum value of the frequency response of a filter to be equal to one. Implementation is to be done for all the 8 frequencies.
2. The rest of this section describes how you can exhibit that you have designed a correct set of BPFs. In particular, you should justify how to choose L , the length of the filters. When you have completed your filter design function, you should run the $L = 40$ and $L = 80$ cases, and then you should determine empirically the minimum length L so that the frequency response will satisfy the specifications on passband width and stopband rejection. Such that the frequencies do not overlap one another.

Task 4: continues

3. Generate the eight (scaled) bandpass filters with $L = 40$ and $f_s = 8000\text{Hz}$. Plot the magnitude of the frequency responses all together on one plot (the range $0 \leq \omega \leq \pi$) is sufficient because $H(e^{j\omega})$ is symmetric).

Indicate the locations of each of the eight DTMF frequencies (697, 770, 852, 941, 1209, 1336, 1477, and 1633 Hz) on this plot to illustrate whether or not the passbands are narrow enough to separate the DTMF frequency components.

The expected graph is to have all the 8 frequencies in it just like an example plot shown in Figure 4.

Hint: For instance in the case of a simple 50-point averaging filter these commands can be used as follows to indicate the frequencies of the zeros of the filter:

```
L=50;
ww=0:pi/L:pi
bb=ones(1,50)/50; %a 5 point average filter
HH=freqz(bb,1,ww)
plot(ww,abs(HH))
%This is just an example this is not the exact code
```

4. Repeat the previous part with $L = 80$ and $f_s=8000\text{Hz}$. The width of the passband is supposed to vary inversely with the filter length L . Explain whether or not that is true by comparing the length 80 and length 40 cases.
5. Comment on the selectivity of the bandpass filters, i.e., use the frequency response to explain how the filter passes one component while rejecting the others. Is each filter's passband narrow enough so that only one frequency component lies in the passband and the others are in the stopband? Since the same value of L is used for all the filters, which filter drives the problem?
- In other words, for which center frequency is it hardest to meet the specifications for the chosen value of L ?

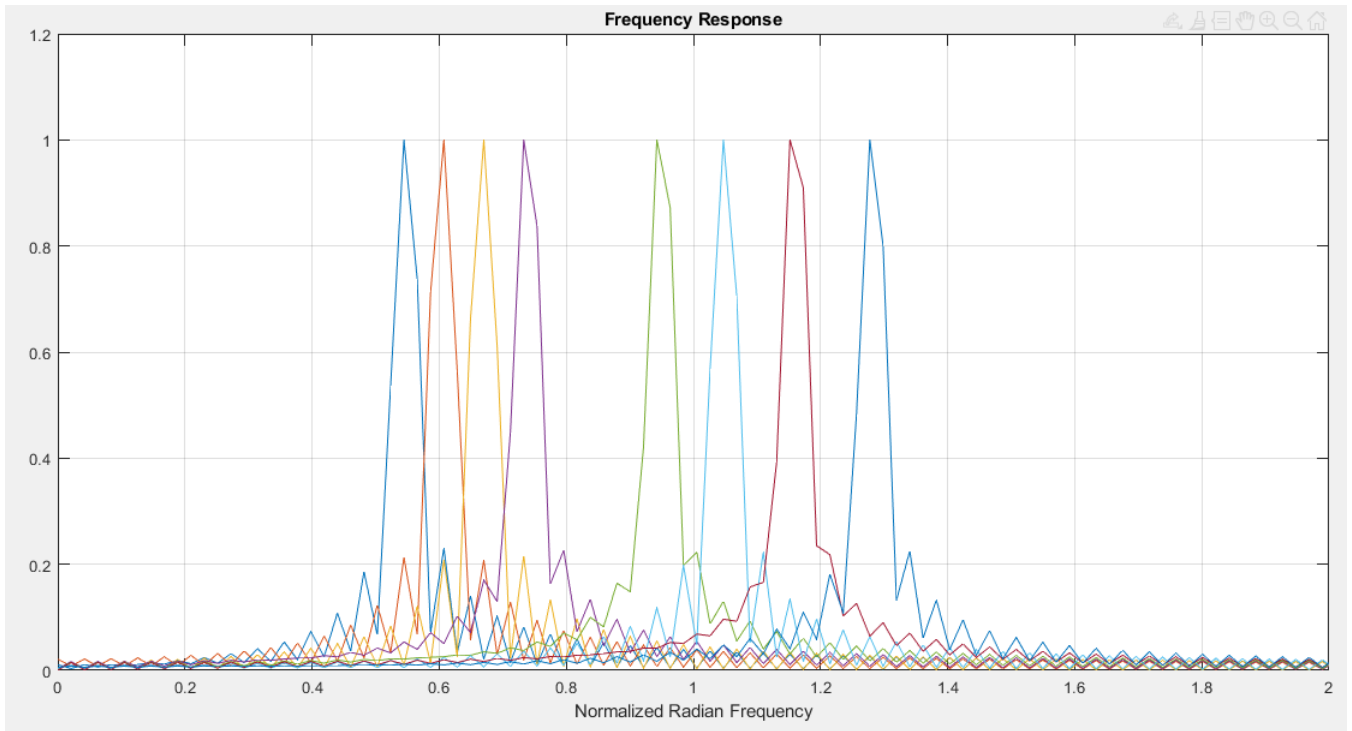


Figure 4: The frequency response of set of bandpass filters is shown.

Part-II

6 A Scoring Function

The final objective is decoding—a process that requires a binary decision on the presence or absence of the individual tones. In order to make the signal detection an automated process, we need a score function that rates the different possibilities.

```
function sc = dtmfscor(xx, hh)
%DTMFSCORE
% usage: sc = dtmfscor(xx, hh)
% returns a score based on the max amplitude of the filtered output
% xx = input DTMF tone
% hh = impulse response of ONE bandpass filter
%
% The signal detection is done by filtering xx with a length-L
% BPF, hh, and then finding the maximum amplitude of the output.
% The score is either 1 or 0.
% sc = 1 if max(|y[n]|) is greater than, or equal to, 0.59
% sc = 0 if max(|y[n]|) is less than 0.59
%
xx = xx*(2/max(abs(xx))); %--Scale the input x[n] to the range [-2,+2]
```

Given above is the skeleton of dtmfscor.m function.

Task 5: Scoring function: dtmfscore.m

1. Using the skeleton of the `dtmfscore.m` function provided above, complete this function with additional lines of code. The input signal `xx` to the `dtmfscore` function must be a short segment from the DTMF signal. The task of breaking up the signal so that each short segment corresponds to one key is done by the function `dtmfcut` prior to calling `dtmfscore`^a.
2. Use the following rule for scoring: the score equals one when $\max |y_i[n]| \geq 0.59$; otherwise, it is zero. The signal $y_i[n]$ is the output of the i -th BPF.
3. Prior to filtering and scoring, make sure that the input signal $x[n]$ is normalized to the range $[-2, +2]$. This part has already been done for you written in the `dtmfscore.m` function. With this scaling the two sinusoids that make up $x[n]$ should each have amplitudes of approximately 1.0 ^b Therefore the scoring threshold of 0.59 corresponds to a 59% level for detecting the presence of one sinusoid.
4. The scoring rule above depends on proper scaling of the frequency response of the bandpass filters. Explain why the maximum value of the magnitude for $H(e^{j\omega})$ must be equal to one for each filter. Consider the fact that both sinusoids in the DTMF tone will experience a known gain (or attenuation) through the bandpass filter, so the amplitude of the output can be predicted if we control both the frequency response and the amplitude of the input.
5. When debugging your program it might be useful to have a plot command inside the `dtmfscore.m` function. If you plot the first 200–500 points of the filtered output, you should be able to see two cases: either $y[n]$ is a strong sinusoid with an amplitude close to one (when the filter is matched to one of the component frequencies), or $y[n]$ is relatively small when the filter passband and input signal frequency are mismatched.

^a`dtmfscore.m` file is already provided on LMS

^bThe two sinusoids in a DTMF tone have frequencies that are not harmonics. When plotted versus time, the peaks of the two sinusoids will eventually line up.

7 DTMF Decode Function

The DTMF decoding function, `dtmfrun` must use information from `dtmfscore` to determine which key was pressed based on an input DTMF tone.

```

function keys = dtmfrun(xx,L,fs)
%DTMFRUN keys = dtmfrun(xx,L,fs)
% returns the list of key names found in xx.
% keys = array of characters, i.e., the decoded key names
% xx = DTMF waveform
% L = filter length
% fs = sampling freq
dtmf.keys = ...
    ['1','2','3','A';
     '4','5','6','B';
     '7','8','9','C';
     '*','0','#','D'];

dtmf.colTones = ones(4,1)*[1209,1336,1477,1633];
dtmf.rowTones = [697;770;852;941]*ones(1,4);
% defines 1X8 vector of frequencies
center_freqs = .... %<=====FILL IN THE CODE HERE
hh = dtmfdesign( center_freqs,L,fs );
% hh = L by 8 MATRIX of all the filters. Each column contains the
% impulse response of one BPF (bandpass filter)
%
[nstart,nstop] = dtmfcut(xx,fs); %<--Find the beginning and end of tone bursts
keys = []; %initialize keys
for kk=1:length(nstart) %for eah tone
x_seg = xx(nstart(kk):nstop(kk)); %<--Extract one DTMF tone
.... %<=====FILL IN THE CODE HERE
end

```

Given above is the skeleton of dtmfrun.m function. Complete the for loop in this function with additional lines of code.

Task 6: DTMF Decode Function: dtmfrun.m

The function dtmfrun works as follows:

1. First, design the eight bandpass filters that are needed by calling the dtmfdesign function that you have already created (already done for you).
2. Now, break the input signal down into individual segments, the task of breaking up the signal so that each segment corresponds to one key is done with the function named dtmfcut^a. For each segment, you will have to call the dtmfscor function (which you have already written in task 5) to score the different BPF outputs. Complete the for loop such that it gives score for each segment. The score returned from dtmfscor must be either a '1' or a '0' for each frequency. Then the decoding works as follows: If exactly one row frequency and one column frequency are scored as 1's, then a unique key is identified and the decoding is probably successful. In this case, you can determine the key by using the row and column index.
Hints: 1. Use MATLAB's logicals (e.g., find) to implement the tests in a few statements.
2. The input signal to the dtmfscor function must be a short segment from the DTMF signal.
3. Finally decoding part; the final output is the list of decoded keys. For loop has still not ended, you need to determine the key for each segment using the data from dtmfscor function (acquired in previous part). You must add the logic to find the row and column number, in order to decide which key is present.
4. Use concatenation technique to combine the Touch tones pressed. Your loop and function end here.

^aThe m-file for function dtmfcut.m is present on LMS download it in your work directory

8 Telephone Numbers

The functions dtmf dial.m and dtmfrun.m can be used to test the entire DTMF system as shown as follows:

```
fs = 8000; %<--use this sampling rate in all functions
tk = [A,B,C,D,*,#,0,1,2,3,4,5,6,7,8,9];
xx = dtmf dial( tk, fs );
soundsc(xx, fs)
L = ... %<--use your value of L
dtmfrun(xx, L, fs)
```

For the dtmfrun function to work correctly, all the M-files must be on the MATLAB path.

Task 7: Encoding and Decoding DTMF Signal

Demonstrate a working version of your program by running it on the following phone number:
407*89132BADC



Assessment Rubric
Lab 10: Encoding & Decoding DTMF Touch Tone
(Open Ended Lab)

Part I & Part II

Name:	Student ID:
--------------	--------------------

Marks distribution:

	Tasks	OE2	OE5	OE6	AR4	AR7
In-Lab	Task 1			8	/10	-
	Task 2	8	4	4		4
	Task 3	4	2	2		2
	Task 4	12	8	12		2
	Task 5	4		6		2
	Task 6	12		6		4
	Task 7		6	4		-
Total =120		/40	/20	/40	/10	/10
CLO Mapped		CLO2	CLO2	CLO2	CLO3	CLO3

CLO – (LDL)	Total Points	Points Obtained
CLO2 – (Psy-4)	100	
CLO3 – (Aff-3)	20	
Total	100	

For description of different levels of the mapped rubrics, please refer the provided Lab Evaluation Assessment Rubrics and Affective Domain Assessment Rubrics.



Open-Ended Lab Evaluation Assessment Rubric

#	Assessment Elements	Level 1: Unsatisfactory	Level 2: Developing	Level 3: Good	Level 4: Exemplary
OE1	Problem Definition	Fails to clearly define the problem or research question.	The problem has been defined to some extent but lacks precision or relevance.	The problem or research question has been defined clearly and contextually	The problem has been defined clearly/ Research has been done with precision and relevance.
OE2	Experimental Design	The proposed design is unsubstantiated or does not satisfy most of the given constraints. The breakdown of system into features is incomplete and still at lower resolution.	The justification for the proposed design is weak, and it only satisfies some constraints. The breakdown of the system is missing some features and resolution is not appropriate in some places.	The proposed design is substantiated, preferably through proper analysis, and satisfies most given constraints. The breakdown of system into features seems complete, but resolution is not appropriate at some places.	The proposed design is substantiated, preferably through proper analysis, and satisfies all given constraints. The breakdown of system into features seems complete and at appropriate resolution, given students' level.
OE3	Data Collection	Measurements are incomplete, inaccurate and imprecise. Observations are incomplete or not included. Symbols, units and significant figures are not included.	Measurements are somewhat inaccurate and imprecise. Observations are incomplete or vague. Major errors are there in the use of symbols, units and significant digits.	Measurements are mostly accurate. Observations are generally complete. Minor errors are present in using symbols, units and significant digits.	Measurements are both accurate and precise. Data collection is systematic. Observations are very thorough and include appropriate symbols, units and significant digits and tasks completed in due time.
OE4	Analysis & Interpretation	Fails to analyze data effectively or draw meaningful interpretations.	The analysis of data is incomplete or important trends have been missed or provided limited interpretations.	The data has been analyzed effectively, by identifying evident trends and drawing reasonable interpretations.	In depth analysis has been made by identifying trends, patterns, and relationships. Insightful interpretations have been drawn.
OE5	Results, Plots and report	Figures/ graphs / tables are not developed or are poorly constructed with erroneous results. Titles, captions, units are not mentioned. Data is presented in an obscure manner or not presented at all.	Figures, graphs and tables are drawn but contain errors. Titles, captions, units are not accurate. Data presentation is not too clear. Most of the requirements are included in the report but are not well explained.	All figures, graphs, tables are correctly drawn but contain minor errors or some of the details are missing. Report meets all prescribed requirements.	Figures / graphs / tables are correctly drawn, and appropriate titles/captions and proper units are mentioned. Data presentation is systematic. Report meets all requirements, and it is prepared in original and creative way to engage readers.
OE6	Reflection	Lacks meaningful self-evaluation or reflection on the experiment.	Offers limited self-evaluation without significant insights.	Reflects on the experiment, identifying areas of success and areas for improvement.	Demonstrates critical self-evaluation, identifying strengths, weaknesses, and areas for improvement in the experimental approach.