1. Description

1.1. Project

Project Name	rtos
Board Name	STM32F3DISCOVERY
Generated with:	STM32CubeMX 4.20.1
Date	04/19/2017

1.2. MCU

MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303VCTx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

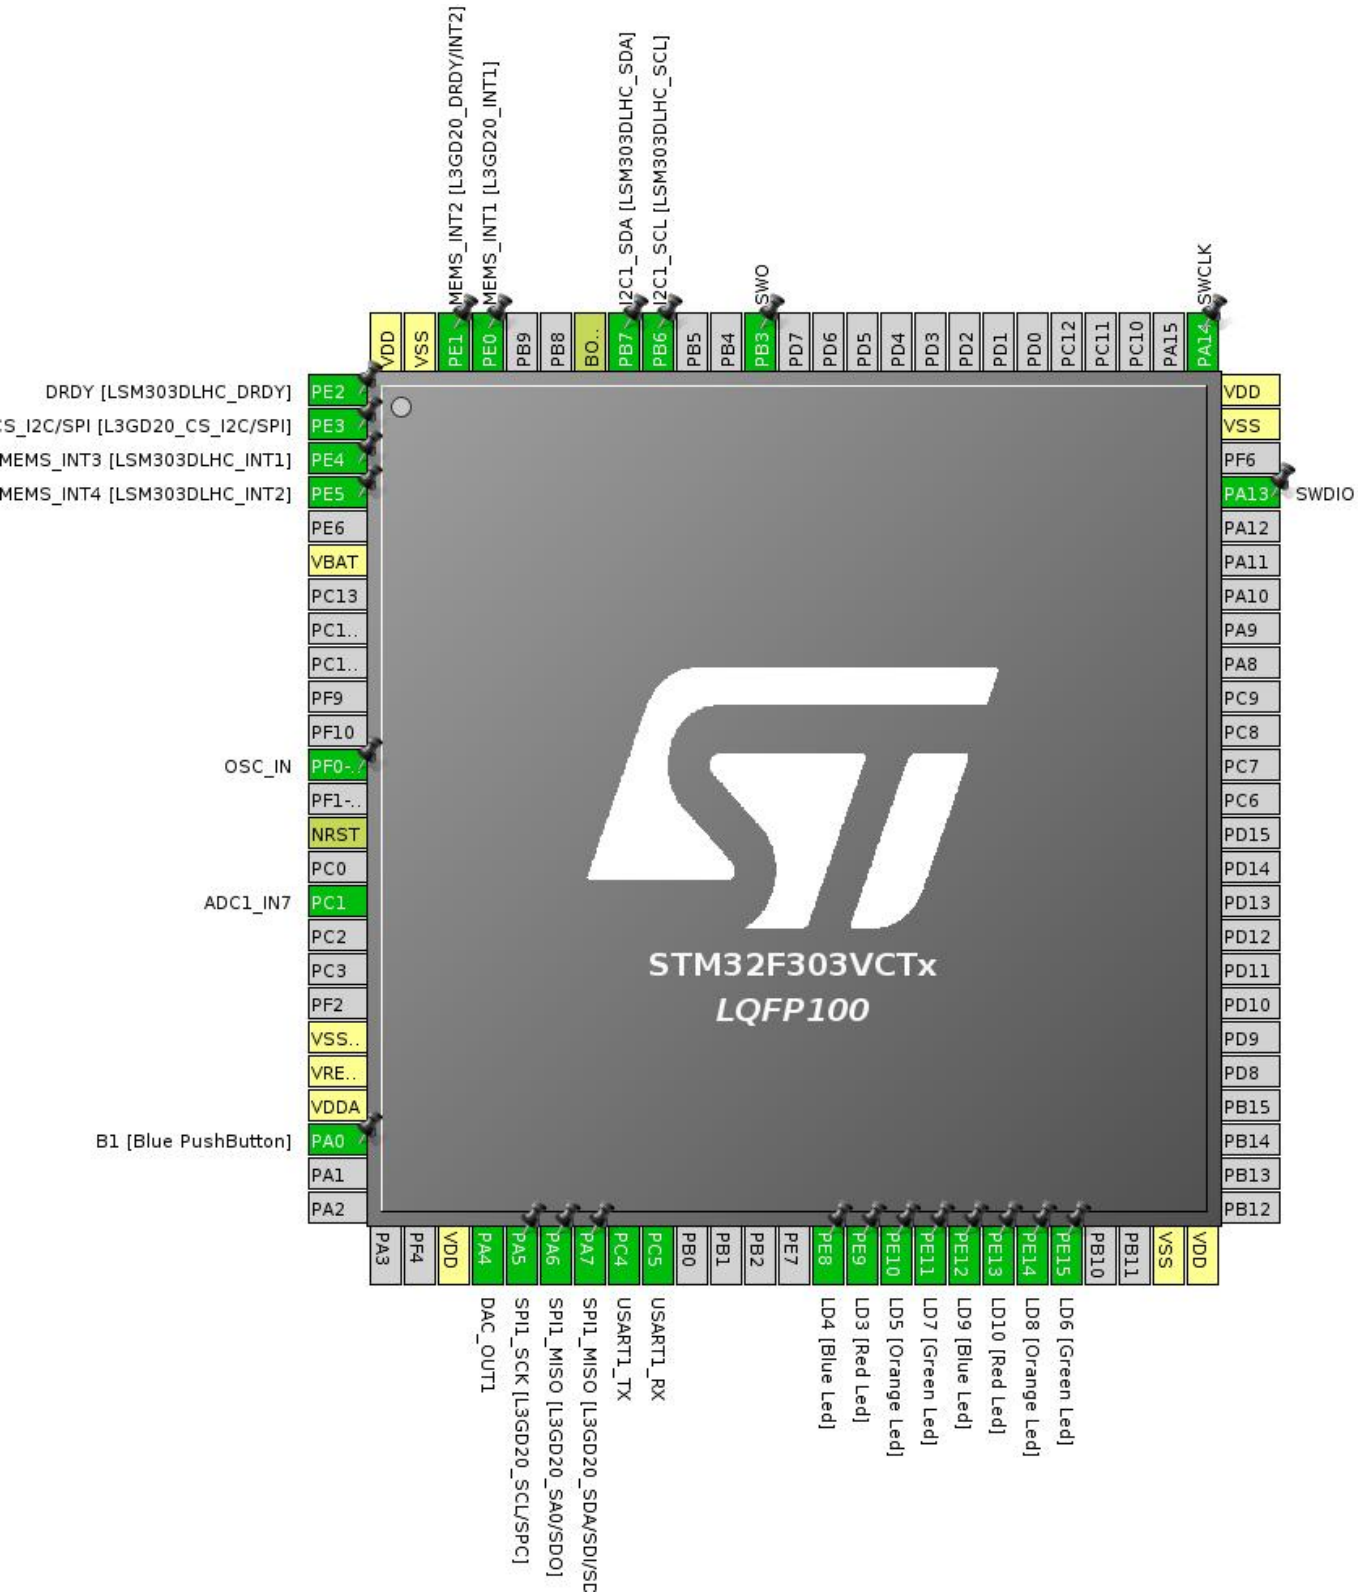

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2	I/O	GPIO_EXTI2	DRDY [LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
3	PE4	I/O	GPIO_EXTI4	MEMS_INT3 [LSM303DLHC_INT1]
4	PE5	I/O	GPIO_EXTI5	MEMS_INT4 [LSM303DLHC_INT2]
6	VBAT	Power		
12	PF0-OSC_IN	I/O	RCC_OSC_IN	OSC_IN
14	NRST	Reset		
16	PC1	I/O	ADC1_IN7	
20	VSSA/VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0 *	I/O	GPIO_Input	B1 [Blue PushButton]
28	VDD	Power		
29	PA4	I/O	DAC_OUT1	
30	PA5	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SCL/SPC]
31	PA6	I/O	SPI1_MISO	SPI1_MISO [L3GD20_SA0/SDO]
32	PA7	I/O	SPI1_MOSI	SPI1_MISO [L3GD20_SDA/SDI/SDO]
33	PC4	I/O	USART1_TX	
34	PC5	I/O	USART1_RX	
39	PE8 *	I/O	GPIO_Output	LD4 [Blue Led]
40	PE9 *	I/O	GPIO_Output	LD3 [Red Led]
41	PE10 *	I/O	GPIO_Output	LD5 [Orange Led]
42	PE11 *	I/O	GPIO_Output	LD7 [Green Led]
43	PE12 *	I/O	GPIO_Output	LD9 [Blue Led]
44	PE13 *	I/O	GPIO_Output	LD10 [Red Led]
45	PE14 *	I/O	GPIO_Output	LD8 [Orange Led]
46	PE15 *	I/O	GPIO_Output	LD6 [Green Led]
49	VSS	Power		
50	VDD	Power		
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
89	PB3	I/O	SYS_JTDO-TRACESWO	SWO
92	PB6	I/O	I2C1_SCL	I2C1_SCL [LSM303DLHC_SCL]
93	PB7	I/O	I2C1_SDA	I2C1_SDA [LSM303DLHC_SDA]
94	BOOT0	Boot		
97	PE0	I/O	GPIO_EXTI0	MEMS_INT1 [L3GD20_INT1]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_DRDY/INT2]
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

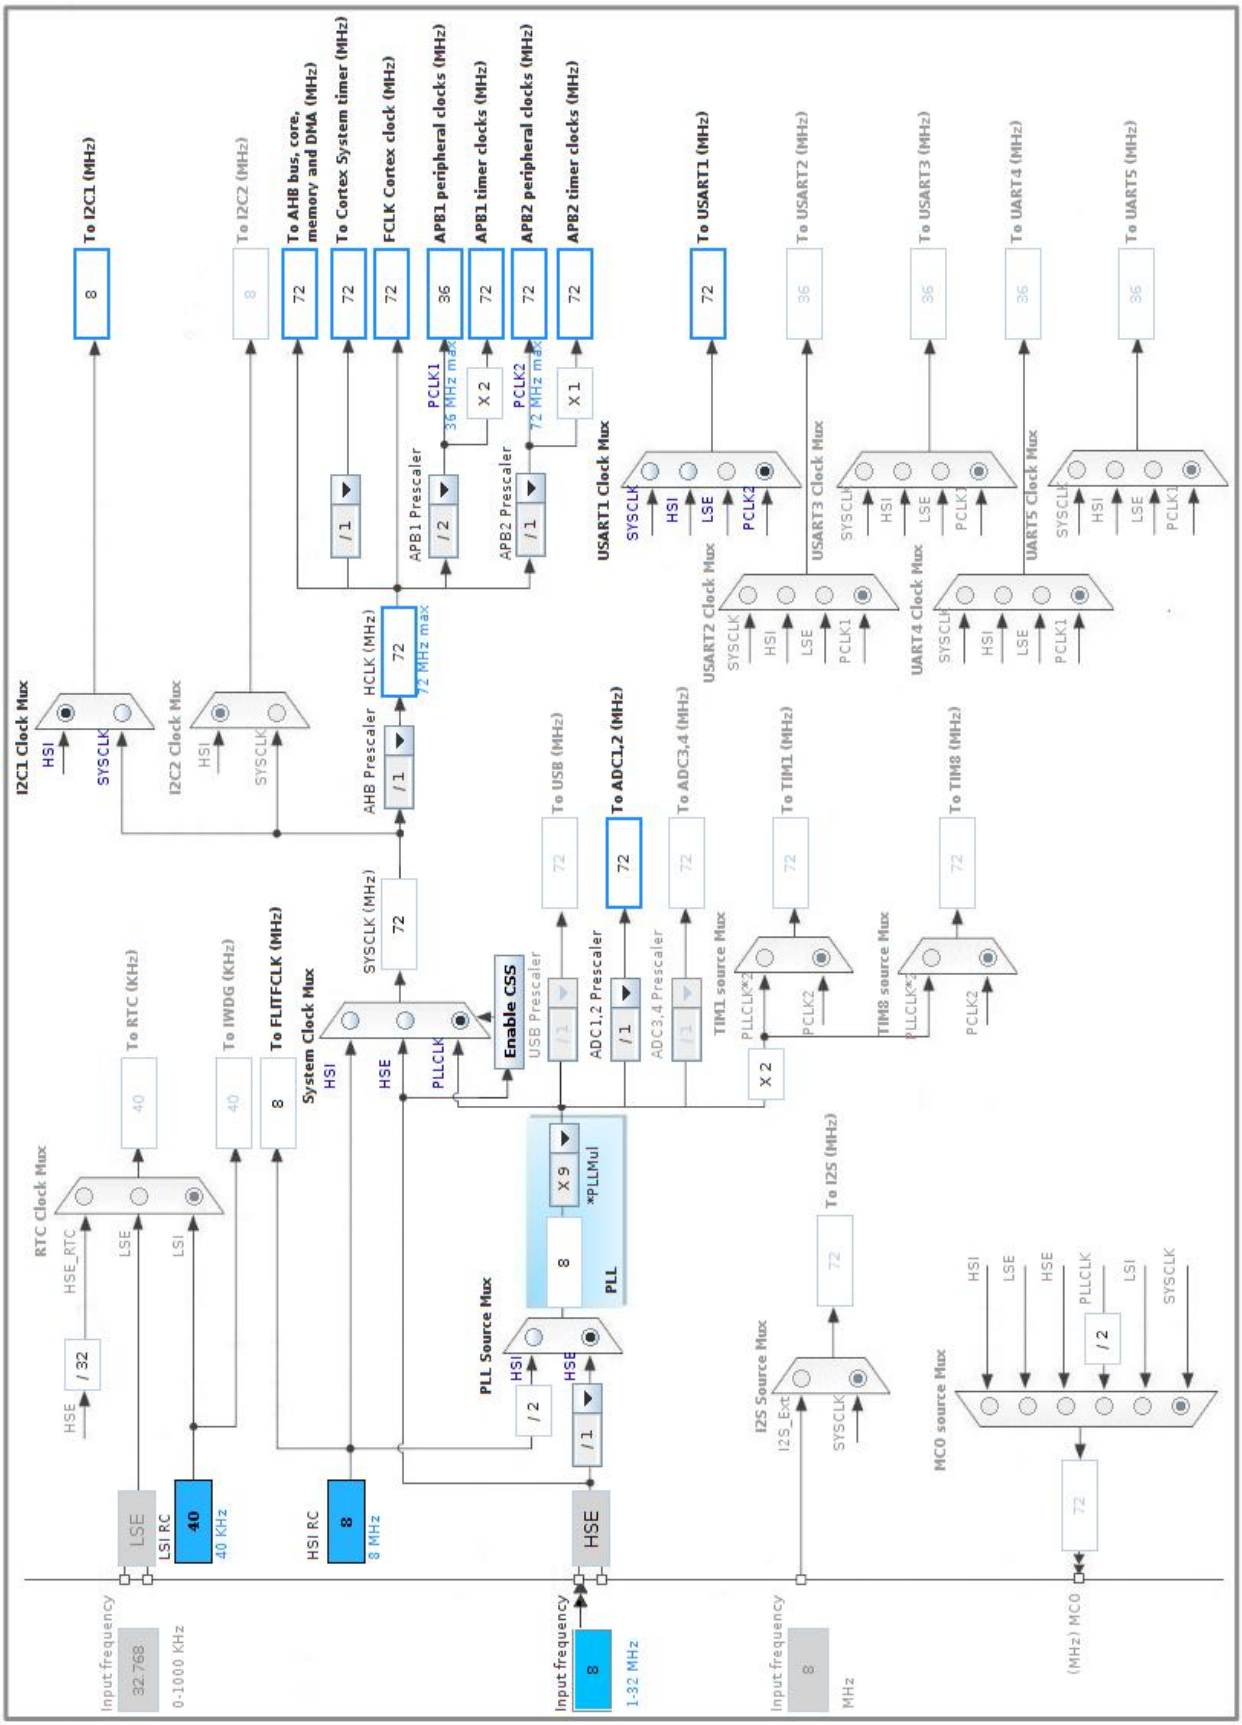

5. IPs and Middleware Configuration

5.1. ADC1

IN7: IN7 Single-ended

5.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	ADC Asynchronous clock mode
Resolution	**ADC 8-bit resolution ***
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	**Enabled ***
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data overwritten
Low Power Auto Wait	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Number Of Conversion	1
External Trigger Conversion Source	**Timer 6 Trigger Out event ***
External Trigger Conversion Edge	Trigger detection on the rising edge
Rank	1
Channel	Channel 7
Sampling Time	**7.5 Cycles ***
Offset Number	No offset
Offset	0

ADC_Injected_ConversionMode:

Enable Injected Conversions	Enable
Number Of Conversions	0

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false

5.2. DAC

mode: OUT1 Configuration

5.2.1. Parameter Settings:

DAC Out1 Settings:

Output Buffer	Enable
Trigger	**Timer 6 Trigger Out event ***
Wave generation mode	Disabled

5.3. I2C1

I2C: I2C

5.3.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	**Fast Mode ***
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x0010061A ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.4. RCC

High Speed Clock (HSE): BYPASS Clock Source

5.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

5.5. SPI1

Mode: Full-Duplex Master

5.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**32 ***
Baud Rate	**500.0 KBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

5.6. SYS

Debug: Trace Asynchronous Sw

Timebase Source: TIM7

5.7. TIM6

mode: Activated

5.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**71 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**10000 ***
auto-reload preload	**Enable ***

Trigger Output (TRGO) Parameters:

Trigger Event Selection	**Update Event ***

5.8. USART1

Mode: Asynchronous

5.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	**115200 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.9. FREERTOS

mode: Enabled

5.9.1. Config parameters:

Versions:

FreeRTOS version	9.0.0
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

Memory Allocation	Dynamic
TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY	Enabled

GENERATE_RUN_TIME_STATS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	**Enabled ***
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.9.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC1	ADC1_IN7	Analog mode	No pull up pull down	n/a	
DAC	PA4	DAC_OUT1	Analog mode	No pull up pull down	n/a	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull up	Low	I2C1_SCL [LSM303DLHC_SCL]
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull up	Low	I2C1_SDA [LSM303DLHC_SDA]
RCC	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	OSC_IN
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull up pull down	Low	SPI1_SCK [L3GD20_SCL/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull up pull down	Low	SPI1_MISO [L3GD20_SA0/SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull up pull down	Low	SPI1_MISO [L3GD20_SDA/SDI/SDO]
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	SWO
USART1	PC4	USART1_TX	Alternate Function Push Pull	Pull up	**High ***	
	PC5	USART1_RX	Alternate Function Push Pull	Pull up	**High ***	
GPIO	PE2	GPIO_EXTI2	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	DRDY [LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull up pull down	Low	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE4	GPIO_EXTI4	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT3 [LSM303DLHC_INT1]
	PE5	GPIO_EXTI5	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT4 [LSM303DLHC_INT2]
	PA0	GPIO_Input	Input mode	No pull up pull down	n/a	B1 [Blue PushButton]
	PE8	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD4 [Blue Led]
	PE9	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD3 [Red Led]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PE10	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD5 [Orange Led]
	PE11	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD7 [Green Led]
	PE12	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD9 [Blue Led]
	PE13	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD10 [Red Led]
	PE14	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD8 [Orange Led]
	PE15	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD6 [Green Led]
	PE0	GPIO_EXTI0	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT1 [L3GD20_INT1]
	PE1	GPIO_EXTI1	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT2 [L3GD20_DRDY/INT2]

6.2. DMA configuration

DMA request	Stream	Direction	Priority
DAC_CH1	DMA1_Channel3	Memory To Peripheral	Low
USART1_TX	DMA1_Channel4	Memory To Peripheral	Low
ADC1	DMA1_Channel1	Peripheral To Memory	Low
I2C1_RX	DMA1_Channel7	Peripheral To Memory	Low

DAC_CH1: DMA1_Channel3 DMA request Settings:

Mode:	**Circular ***
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Half Word
Memory Data Width:	Half Word

USART1_TX: DMA1_Channel4 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

ADC1: DMA1_Channel1 DMA request Settings:

Mode:	**Circular ***
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Half Word
Memory Data Width:	Half Word

I2C1_RX: DMA1_Channel7 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte

Memory Data Width:	Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
DMA1 channel1 global interrupt	true	5	0
DMA1 channel3 global interrupt	true	7	0
DMA1 channel4 global interrupt	true	7	0
DMA1 channel7 global interrupt	true	7	0
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	true	5	0
I2C1 error interrupt	true	5	0
USART1 global interrupt / USART1 wake-up interrupt through EXTI line 25	true	5	0
TIM7 global interrupt	true	0	0
PVD interrupt through EXTI line16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 interrupts	unused		
SPI1 global interrupt	unused		
Timer 6 interrupt and DAC underrun interrupts	unused		
Floating point unit interrupt	unused		

*** User modified value**

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303VCTx
Datasheet	023353_Rev13

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	rtos
Project Folder	/home/koala/workspace/embedded_project/rtos
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F3 V1.7.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No