SIMTiX: A Compact RISC-V SIMT Accelerator With Line-Aggregated Atomic Operations for FPGA Systems-on-Chip

Krishna Gorai and Bikram Paul

***Abstract*—This paper introduces SIMTiX, a RISC-V single-instruction multiple-thread (SIMT) accelerator for FPGA systems-on-chip. Open soft GPUs either omit the memory system that applications need or are large, and they are rarely compared on the same device. SIMTiX has eight lanes and four warps, FP32/FP16 arithmetic, warp shuffles, block barriers, RV32A atomic memory operations (AMOs), and a non-blocking 16 KB L1 data cache that reaches the DDR4 of a Zynq UltraScale+ processing system. We propose line-aggregated AMOs: the memory engine serves all lanes of an AMO that fall in one cache line with one read and one write, and returns to every lane the value of serial execution in lane order. This reduces the memory requests of a histogram from 2,176 to 640 and its run time by $1.7\times$, and speeds up k-means by $1.29\times$, for 2,551 lookup tables (LUTs). The complete board design closes timing at 101.0 MHz. We built Vortex with four warps of eight threads for the same device with the same Vivado flow: SIMTiX runs seven applications in $2.01\times$ less time (geometric mean) with $4.3\times$ less estimated energy, 5% more LUTs and 59% fewer flip-flops. Vortex needs 16 warps and 30% more LUTs to come within $1.20\times$ of SIMTiX's run time, and is then faster on GEMM and SpMV. A sweep from four to 16 lanes shows that the memory engine, not the lanes, limits wider warps. [one sentence with the board result].**

***Index Terms*—Atomic memory operations, FPGA, general-purpose GPU (GPGPU), RISC-V, single-instruction multiple-thread (SIMT), soft processor.**

I. Introduction

FIELD-programmable gate array (FPGA) systems-on-chip such as the AMD Zynq UltraScale+ combine hard processor cores with programmable logic. Typically the processors run the control code and the logic holds fixed-function accelerators, each synthesized for one kernel. A programmable data-parallel engine in the logic can instead serve many kernels without a new bitstream. Graphics processing units (GPUs) provide such an engine through the single-instruction multiple-thread (SIMT) model: scalar threads are grouped into warps that execute one instruction stream on a vector of lanes, and the hardware switches between warps to hide memory latency [1], [2].

A number of soft GPUs have been published (Section II). The compact ones have no cache; eGPU [5], for example, reaches global data through its shared memory. The ones with a complete memory system, such as Vortex [3] and Ventus [4], are large: one Ventus streaming multiprocessor occupies 329k LUTs. The designs are also evaluated on different devices, with different tools and benchmarks, so their costs cannot be compared directly.

Atomic memory operations (AMOs) are a particular problem for a soft SIMT engine. One AMO instruction of a warp of L lanes is L read-modify-write operations, and in histogram, clustering and graph kernels many of them fall in the same cache line or on the same word. A GPU executes them in atomic units at its L2 cache [12]. In an FPGA system-on-chip the accelerator reaches memory through the AXI4 ports of the processing system, which have no atomic transactions, so the accelerator must perform every AMO itself as a read and a write. Performed one lane at a time, the atomics become the bottleneck of these kernels.

SIMTiX is designed from the outset as a peripheral of the processing system: the Cortex-A53 is the host, kernel data lives in DDR4, and the complete board design, not only the accelerator, has to close timing. SIMTiX makes the following contributions:

1) *Memory system*: a non-blocking L1 data cache, a memory engine with one context per warp and an AXI4 master into DDR4, with warp shuffles, block barriers and RV32A AMOs, in 81k LUTs of a board design that closes at 101.0 MHz (Sections III and V).
2) *Line-aggregated AMOs*: all lanes of an AMO that fall in one line are served with one read and one masked write, and every lane receives the value of serial execution in lane order. We give a one-lane-per-cycle and a parallel variant, with their cost and benefit (Sections IV and VI-C).
3) *Same-device comparison*: Vortex 3.0 and SIMTiX are built for the same device with the same Vivado flow and run the same seven applications, at 4, 8 and 16 Vortex warps, which separates instruction count, instructions per cycle (IPC), area, frequency and power (Section VI-D).
4) *Scalability*: a sweep from four to 16 lanes, which shows that the memory engine limits wider warps and exposed a bound on the depth of the reconvergence stack, and measurements on the board against the Cortex-A53 (Sections VI-E and VI-F).

Our goal is not to compete with hard GPUs or with multi-core soft GPGPUs, but to provide a compact programmable engine with a complete memory system beside the host processor of a mid-size FPGA system-on-chip. The register-transfer-level (RTL) source, kernels, testbenches, Vortex port and scripts are

K. Gorai and B. Paul are with the School of Computing and Electrical Engineering, Indian Institute of Technology Mandi, Mandi 175075, India (e-mail: kg05112001@gmail.com; bikram@iitmandi.ac.in).

available at https://github.com/Krishna-Gorai/simtix.

II. Comparison to Other Soft GPU Architectures

FlexGrip [6] executes CUDA binaries on an FPGA, and FGPU [7] is an OpenCL-programmed SIMT processor. MIAOW [8] implements the AMD Southern Islands compute unit in RTL but models its memory hierarchy in software. Nyami [9] is a synthesizable GPU model, and Simty [10] executes the RISC-V instruction set with a generalized SIMT front end. eGPU [5] places 16 scalar processors and 512 threads in 5,600 Agilex logic modules and closes above 770 MHz. Vortex [3] extends RISC-V with instructions for warp control, divergence and barriers, and provides a configurable multicore GPGPU with L1 and L2 caches, local memory and an OpenCL stack. Ventus [4] builds a GPGPU on the RISC-V vector extension; its vector register file is 54% of the area of a streaming multiprocessor.

Table I places the SIMTiX instruction set beside the GPU instruction sets compared in [3]. SIMTiX runs one scalar RV32 thread per lane, like Vortex, but differs in three columns. It needs no thread-control or divergence instructions: the hardware spawns the warps, `ecall` ends a warp, and the reconvergence stack detects divergence from the branch outcomes and reconverges without the split and join instructions that Vortex's compiler inserts. It has no fence; a barrier releases only when the memory operations issued before it have completed. And its GPU operations are a warp shuffle and an INT8 dot product rather than texture sampling.

Table II compares the resources of these designs, counted in lookup tables (LUTs) and digital signal processing (DSP) blocks. This comparison is only representative: the devices, tools and configurations differ, and the frequencies of the earlier designs are taken from their papers. One Ventus streaming multiprocessor needs more LUTs than the 230,400 of our device, so it cannot be built for it. SIMTiX is closest to Vortex: both execute one scalar RISC-V thread per lane with a few custom instructions, and Vortex can be configured with the same warp and lane counts. We therefore built Vortex 3.0 for our device with our flow and compare the two directly in Section VI-D.

GPUs execute global atomics in atomic units at the L2 cache [12], and in the GPU model of [13] the atomics of a warp that fall in one cache sector form one transaction. Franey and Lipasti studied hardware support for GPU atomics [14]. PHI buffers and coalesces commutative updates in the caches of a multicore [15], and DAB buffers GPU atomics to make them deterministic [13]. In software, warp-aggregated atomics combine the same-address increments of a warp with shuffles and let one elected lane perform a single atomic [16]; this needs a commutative operation on one address and a change to the kernel. Vortex 3.0 sends the AMO of each lane as a separate request to a bank of its last-level cache, which reads, modifies and writes one word per request. SIMTiX aggregates in the memory engine of the core, ahead of the L1. The aggregation covers lanes on different words of one line and lanes on the same word, applies to every RV32A AMO including swap, minimum and maximum, returns the old value of every lane, and needs no change to the kernel.

III. Architecture

SIMTiX is organized in a typical SIMT machine topology, but is designed from the start as a peripheral of an FPGA system-on-chip. A kernel is launched for N threads. We will use the term *warp* to denote L threads that execute one instruction together, one per *lane*, and *block* to denote a group of 2^b warps that can synchronize at a barrier and share a scratchpad. W warps are resident at a time; the board design has $W = 8$ and $L = 8$. Fig. 1 shows the board system (top) and the accelerator grouped by pipeline stage (bottom).

A. System and Host Interface

One Cortex-A53 core runs a bare-metal host program. It reaches the accelerator through the PS master port M_AXI_HPM0_FPD and an AXI SmartConnect, which converts the transactions to AXI4-Lite. The *AXI4-Lite slave* of the accelerator decodes two windows. The first holds the *command registers*: the kernel PC, the address of the kernel's parameter block, the thread count N, the block size and GO, and, for reading, DONE, the cycle count of the last launch, the L1 read hits and misses, and a sticky AXI error flag. The second is the *instruction RAM*, 1,024 32-bit words, into which the host writes the kernel. When the host writes GO, the *dispatcher* invalidates the L1, starts the warps, counts cycles until the last warp finishes, and sets DONE.

Kernel data lives in DDR4, which the accelerator reaches through its AXI4 master and the 128-bit high-performance port S_AXI_HP0 of the processing system (PS). This port is not coherent with the A53 caches, so the host cleans its data cache before GO and invalidates it after DONE. The I^2C controller of the PS reads the board's power monitors (Section VI-F).

B. Fetch Stage

The *spawner* divides the threads into $\lceil N/L \rceil$ warps and places one per cycle into a free slot of the *warp table*, so a slot is refilled as soon as its warp finishes; the last warp is masked if N is not a multiple of L. A block is spawned whole into a group of 2^b slots, so its warps are always resident together. The warp table holds the state of each slot and the thread ID of its lane 0. A warp is running, asleep on the register scoreboard, waiting for a store, AMO or the shared divide unit, at a barrier, or finished.

Each warp has a *reconvergence stack* [2], [11] whose frames hold a PC, a reconvergence PC (RPC) and an active mask; the top frame gives the warp's PC and the lanes that execute. A uniform branch only changes the PC of the top frame. When the lanes of a warp disagree, the branch diverges: a forward branch pushes the not-taken lanes with the branch target as RPC, and a backward branch (a loop) pushes the lanes that stay in the loop with the fall-through PC as RPC. A frame whose PC reaches its RPC is popped in an issue slot of its own, and the warp continues with the lanes of the frame below. Every pushed frame holds a strict, non-empty subset of the lanes of the frame below it, so a warp never needs more than L frames, and we set the depth to L.

The *status masks*, derived from the warp table, give the runnable warps, the sleeping and waiting warps, and the warps

TABLE I
GPU INSTRUCTION SETS AND SIMTIX

ISA	Memory model	Threading model	Register file	Thread control	Synchronization	Flow control	ALU operations	Memory operations	GPU operations
RDNA	GDS, LDS, constants, global	Workgroup, wavefront, 32/64 threads	Vector/scalar, 256 VGPRs, 106 SGPRs	End threads, thread mask	Barrier, wait_cnt, data dep.	Branch, thread mask	Arithmetic, conditional, bitwise	Load, store, prefetch	Interpolate, texture sampler
GCN	GDS, LDS, constants, global	Compute unit, wavefront, 64 threads	Vector/scalar, 256 VGPRs, 102 SGPRs	End threads, thread mask	Barrier, wait_cnt, data dep.	Branch, thread mask, split/join	Arithmetic, conditional, bitwise	Load, store, prefetch	Interpolate, texture sampler
PTX	Shared, texture, constants, global	Grid/CTA, warp, 32 threads	Scalar	Predicate	Barrier, membar	Branch, predicate	Arithmetic, conditional, bitwise	Load, store, prefetch	Texture sampler, load, query
GEN	Software managed	Root thread, child thread	256-bit vector, 128 GRFs, predicate	Send message	Wait, fence	Branch, SPF registers, split/join	Arithmetic, conditional, bitwise	Load, store	Interpolate, texture sampler
PowerVR	Global, common store, unified store	USC, 32 threads	Vector, 128-bit	Predicate	Fence	Branch, predicate	Arithmetic, conditional, bitwise	Load, store	Texture sampler, iteration, alpha/depth
Vortex	Shared, global	Compute unit, wavefront	Scalar, 32-bit	Thread mask	Barrier, flush	Split/join	Arithmetic, conditional, bitwise	Load, store	Texture sampler
SIMTiX	Global (L1), block-shared, warp-private	Kernel, block of 2^b warps, warp of 8 threads	Scalar, 32-bit, 32 integer + 32 FP	Hardware spawn, `ecall`, thread mask	Barrier (`bar`), RV32A AMOs	Branch, hardware reconvergence stack	Arithmetic, conditional, bitwise, FP32/FP16, Zba, Zbb min/max, Zicond	Load, store, line-aggregated AMOs	Shuffle, INT8 dot product (`pdot8`)

Rows other than SIMTiX as compared in [3] (Table 1 there). GDS/LDS: global/local data share; VGPR/SGPR: vector/scalar general-purpose registers; CTA: cooperative thread array; GRF: general register file; SPF: special flag; USC: unified shading cluster.

TABLE II
RESOURCE COMPARISON

Architecture	Device	Configuration	LUTs	DSP	$F_{\max}$
FGPU [7][a]	Xilinx 28 nm	2 CU × 8 PE	57k	48	250
FlexGrip [6][a]	Xilinx 40 nm	1 SM × 16 PE	100k	300	100
eGPU [5]	Agilex	1 SM × 16 SP	5.6k[b]	24	771
Ventus [4]	VU37P	1 SM	329k	—	—
Vortex [3][c]	XCZU7EV	4 warps × 8	80.1k	48	140.8
SIMTiX[c]	XCZU7EV	4 warps × 8	84.4k	72	101.6

[a] As reported in [5]. [b] Adaptive logic modules. [c] Built in this work with the same flow (Section VI-A). CU: compute unit; PE: processing element; SM: streaming multiprocessor; SP: scalar processor. $F_{\max}$ in MHz.

at a barrier. A warp at `bar` waits until every live warp of its block has arrived. The *round-robin scheduler* selects the next runnable warp after the one issued last, and the *fetch* block reads the instruction at the PC of its top frame into the pipeline register between the two stages.

C. Execute Stage

The *decoder* accepts RV32I, the RV32M `mul`, the RV32A AMOs without load-reserved and store-conditional, and the single- and half-precision floating-point instructions. Three custom instructions use the *custom-0* opcode space: `pdot8`, a dot product of four signed or unsigned 8-bit integer (INT8) pairs; `shfl.{idx,up,down,xor}`; and `bar`. It also accepts three small standard extensions that shorten the kernels' address and selection code: from Zba the shift-and-add instructions `sh{1,2,3}add`, which form an array element's address in one instruction; from Zbb the integer `min`, `max`, `minu` and `maxu`; and from Zicond `czero.eqz` and `czero.nez`, which zero a register under a condition and so select a value without a branch. They add a decode of the full 7-bit function field and one result multiplexer per lane on the register write path, not on the address path.

The integer *register file* (RF) has two read ports and the floating-point RF three, for the fused multiply-add (FMA). Both hold 32 registers per thread in distributed RAM (LUTRAM), one bank per lane addressed by warp and register. We moved the RFs from flip-flops to LUTRAM because a flip-flop RF needs a 128-to-1 multiplexer per lane and read port; this reduced the LUTs of the integer accelerator from 170,868 to 30,088. A register not yet written in a launch reads its initial value (the thread ID for `a0`, the launch arguments for `a1`–`a4`, zero otherwise), so no cycles are spent clearing the RFs.

The *dispatch* multiplexer sends the operands of the active lanes to the selected unit. The *ALU* of each lane executes the integer instructions, evaluates branch conditions and computes memory addresses. A branch or jump updates the reconvergence stack in a stage of its own one cycle after execution (B in Fig. 1), from its registered outcome; the warp is not fetched again before then. All other units take more than one cycle and accept a new warp instruction every cycle. Each carries the instruction's warp and destination register down a delay line in step with its pipeline, and a *result queue* holds finished results until the register file's write port is free; a unit holds at most eight instructions in its pipeline and queue together. A *register scoreboard* marks, per warp, the integer and floating-point registers whose values are still in a unit or its queue. The issue stage holds back an instruction that reads or writes a marked register or whose unit is full, and that warp

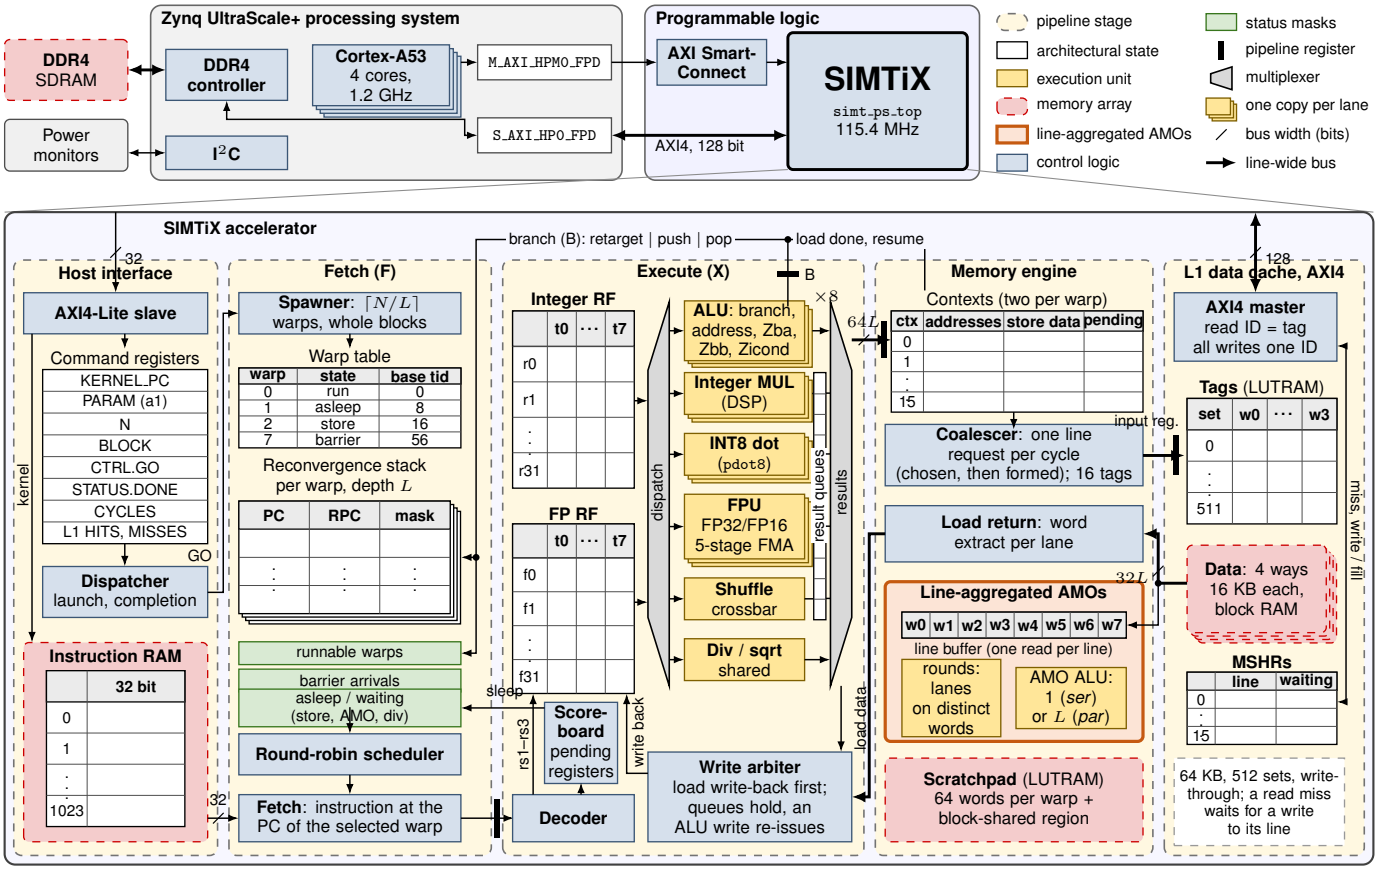


Fig. 1. SIMTiX on the ZCU102 (top) and the accelerator by pipeline stage (bottom). The Cortex-A53 writes the kernel and the launch parameters over AXI4-Lite and polls for completion. The scheduler selects a runnable warp, whose instruction is fetched (F) at the top of its reconvergence stack, decoded and executed (X) on the eight lanes or issued to a multi-cycle unit; the register scoreboard holds back an instruction whose operands are still in flight, and the warp sleeps until one of its results is written. Branch outcomes update the stack one cycle after execution (B). A memory instruction passes to a context of its warp, which coalesces it into line requests and executes AMOs one line at a time. Line requests reach DDR4 through the L1 data cache, the AXI4 master and the port S_AXI_HP0. The register files, the L1 tags and the scratchpad are in LUTRAM. RF: register file; tid: thread ID; RPC: reconvergence PC; MSHR: miss-status holding register.

then sleeps, without taking fetch slots from the other warps, until one of its own results is written (or, if its unit was full, any result). So a warp continues with independent instructions while its multiply, FMA or shuffle results are pending. Each lane has a pipelined integer multiplier on DSP blocks, an INT8 dot-product unit, and an FP32/FP16 unit (*FPU*) for addition, multiplication, the four FMA variants, comparisons, minimum and maximum, sign injection, conversions and classification. The FPU has five pipeline stages, and its 48-bit significand product is formed on a 24×24 cascade of DSP blocks. FP16 operations widen their operands to FP32, use the FP32 datapath and round the result to FP16. This double rounding is innocuous for addition, multiplication and conversions because $24 \geq 2 \cdot 11 + 2$ [17]; the FMA is not covered by that bound, so we round its FP32 intermediate to odd, which makes the final rounding to FP16 correct. We checked the units bit-exactly against an IEEE-754 reference [18] on 116,089 arithmetic and 100,884 conversion vectors that cover every rounding mode.

Two units are shared by the lanes. The *shuffle crossbar* reads a register of another lane, selected by an index, an offset up or down, or an XOR with the lane number, and writes it to every active lane; shuffles implement log-step reductions and scans within a warp. Divide and square root use one digit-recurrence unit through which the active lanes pass in turn, and the warp waits for it; a unit per lane cost 3.7k LUTs. The *result* multiplexer collects the results, and the *write arbiter* grants the single write port of each RF bank. A load returning from the memory engine has priority, then the divide unit, then the result queues, which simply keep a result that loses. A single-cycle ALU result displaced by a load is not committed, and its warp issues the instruction again in the next cycle; this is safe because the displaced instruction has written nothing.

D. Memory Engine

A load, store or AMO leaves the execute stage with the addresses and store data of all lanes, passes an input register, and enters a free *context* of its warp, which also holds the mask of the lanes still pending. There are two contexts per warp, 16 in all, so that a warp waiting for memory does not block the memory accesses of the others (Section VI-B) and a warp can have two loads in flight. A load does not stop its warp: its destination register is marked in the scoreboard until the load completes, so the warp issues independent instructions meanwhile. A store, AMO, barrier or `ecall` waits until its warp has no load outstanding, so a store never overtakes an

earlier load of the same warp and a barrier orders the loads before it against the stores after it. Each cycle the *coalescer* takes one context in rotating order and sends one line request for its lowest pending lane together with every pending lane whose address lies in the same line; this is *coalescing*. A store merges the bytes of these lanes into the line under byte enables. The chosen request waits in a register for the port's grant, so the choice among the contexts and the formation of the line address and data take separate cycles. Each request carries one of 16 tags, and responses may return in any order. The *load return* block extracts the word, half-word or byte of each lane and writes it into the RF through the write arbiter. A context finishes when no lane is pending and every response, writes included, has returned; it then releases the load's register in the scoreboard or, for a store or AMO, resumes its warp, through a register.

An AMO is a read and a write of one line, and its context holds the request port from the read to the write so that no other request reaches the line in between. The *line-aggregated AMO* block applies all the lanes of the line to a buffered copy (Section IV). Two address apertures go to the *scratchpad* instead: 64 words per warp, and a region shared by the warps of a block. The scratchpad is one single-port LUTRAM, so it serves one lane per cycle. The RV32A AMOs (add, swap, and, or, xor, signed and unsigned minimum and maximum) work on global and scratchpad addresses.

E. L1 Data Cache and AXI4 Master

The L1 holds 64 KB in four ways. Its line is the memory engine's line, so at eight lanes it has 512 sets of 32 bytes. A request first enters an *input register* with one skid entry, so the lookup starts from flip-flops (Section V-B). The *tags* are in LUTRAM and the valid bits in flip-flops; the *data* are in 16 block RAMs, and a hit answers two cycles after its grant. A miss allocates one of 16 miss-status holding registers (*MSHRs*); a later miss to the same line joins it, and the returning line answers all of its requests. The cache writes through without allocating on a write miss. We chose write-through because, with GO invalidating the L1, DDR4 then holds every result at DONE and the host needs no flush from the accelerator. The *AXI4 master* turns a line request into an incrementing burst of $32L/128$ beats. A read uses its request tag as AXI ID, and read beats are collected per ID. AXI4 orders only the transactions of one ID, and the processing system's interconnect does reorder others, so all writes use a single ID and a queue matches the in-order write responses to their tags; and a read that misses in the L1 waits while a write to the same line is in flight, so it cannot overtake it. Without these two rules, the histogram's atomic updates were lost on the board; the simulations showed it only once the memory model let a write complete after later reads.

IV. Line-Aggregated Atomic Memory Operations

With one read-modify-write per lane, an AMO whose k active lanes fall in one line costs k reads and k writes, and behind a write-through L1 every write also travels to DDR4. We aggregate the lanes by line instead. Let P be the pending lanes of an AMO context, a_i the address of lane i, and $\ell = \min P$ the lead lane. The engine forms the group $G = \{i \in P : \mathrm{line}(a_i) = \mathrm{line}(a_\ell)\}$ and


1) reads the line once into a line buffer;
2) applies the lanes of G to the buffer in *rounds*: a round applies every remaining lane $i \in G$ for which no lower remaining lane of G addresses the same word; an applied lane receives the old word as its result and the buffer word is replaced by the AMO's new value;
3) writes the line back with one request whose byte enables cover the words that changed; and
4) removes G from P and repeats while P is not empty.

Within a round all lanes address different words and are independent; across rounds the lanes on one word are applied in ascending lane order. The final memory contents and every returned value are therefore those of executing the lanes one at a time in ascending lane order, which is what the per-lane engine does. A group needs as many rounds as the largest number of its lanes on one word.

Fig. 2(a) shows the datapath. The lead lane and L line comparators form G, and the read request carries the line of ℓ. When the line returns, it is loaded into the line buffer and G into the remaining-lanes mask. In each cycle of the apply phase the round select picks the lanes of the round, which takes $L(L-1)/2$ compares of word offsets, 28 at eight lanes. The word multiplexers give each applied lane its old word, which returns to the RF through the write arbiter in a cycle without a load write-back. The AMO ALUs compute the new words, which replace their words in the buffer, and the words written collect into the byte enables of the one masked write. A four-state machine holds the request port from the read to the write. Fig. 2(b) follows one AMO instruction: per lane it needs 16 requests, and aggregated it needs two, with eight apply cycles in the serial variant and three in the parallel one.

We implemented both datapaths. The serial variant (*ser*) has one AMO arithmetic unit and applies the lowest remaining lane in each cycle, so the lanes follow lane order; the parallel variant (*par*) has one unit per word and applies a whole round per cycle. Both return the same values. Each variant is a build parameter, and we built the board design with each. The design without aggregation uses 106,998 LUTs and the serial variant 107,658, 660 more (0.6%); both close timing at 115.4 MHz. The parallel variant uses 114,446 LUTs, 6,788 more than the serial one (6.3%), and closes at 118.7 MHz. Out of context, where synthesis cannot share logic with the rest of the design, the memory engine of the earlier four-warp design grew by 2,551 LUTs (serial) and 5,923 (parallel). The serial variant is the default.

A dedicated kernel issues colliding `amoadd`, `amomax` and `amoswap` instructions and checks every returned value and the final memory against a serial model. It and a histogram run with and without aggregation under seven memory configurations, from a zero-latency memory to the L1 with only two sets, which forces evictions, and the L1 behind the AXI4 master with an out-of-order memory model. On the board, the contention kernel runs with 262,144 threads under each variant, and the host checks all 786,432 returned values and

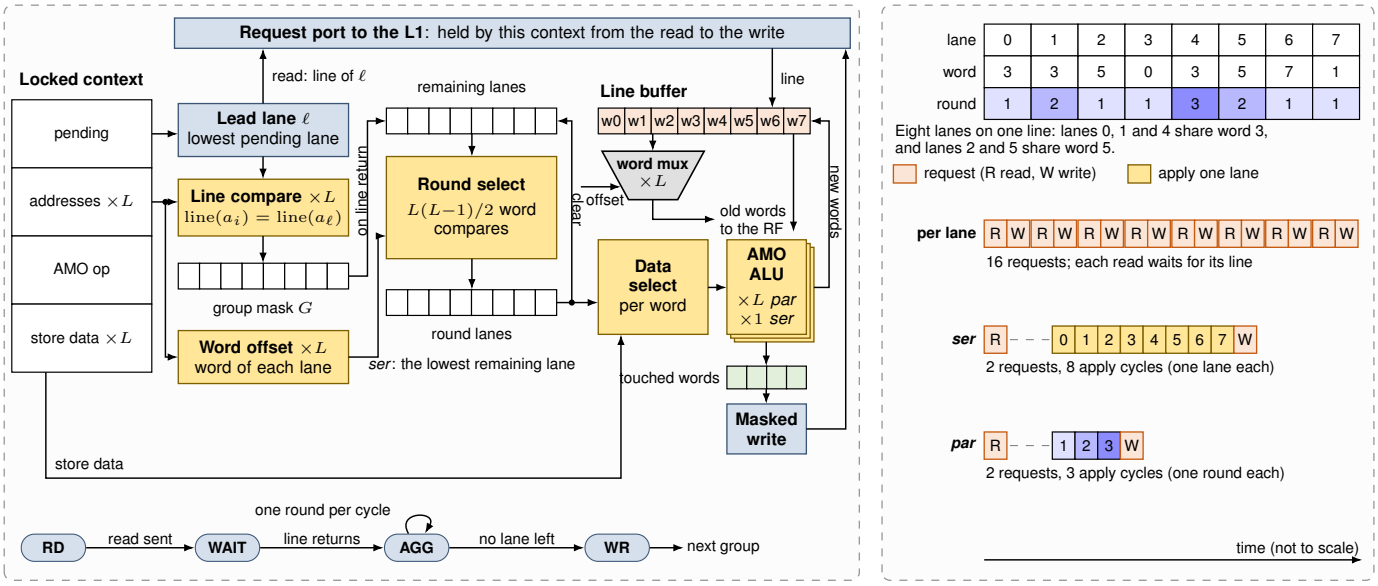

(a) Datapath of the unit (*par* variant)

(b) One AMO instruction of the example

Fig. 2. Line-aggregated AMOs. (a) Datapath of the unit in the parallel variant; the serial variant applies the lowest remaining lane with one ALU and needs no word compares. RD, WAIT, AGG and WR are the read, wait, apply and write states of the context. (b) An AMO whose eight lanes address words of one line: lanes 0, 1 and 4 share word 3 and lanes 2 and 5 share word 5, so the parallel variant applies the group in three rounds.

the 524,288 final words against the lanes executed one at a time in lane order.

V. Implementation and Timing Closure

SIMTiX is written in SystemVerilog. Twenty-one self-checking testbenches, in 38 configurations of memory latency, ordering and cache, run under Vivado's simulator and under Verilator 5.020 in continuous integration; before a bitstream is built, the configuration it uses also runs at the board's input sizes, with write responses delayed behind later reads. We implemented the designs with Vivado 2025.1 for the XCZU9EG-2 device of the ZCU102 (274,080 LUTs, 548,160 flip-flops, 912 block RAMs and 2,520 DSP blocks). The board design is a block design of the PS, an AXI SmartConnect and the accelerator, implemented in context into the bitstream that runs on the board. Its clock comes from the PS, which divides a 1.5 GHz phase-locked loop by an integer; we use $1.5\ \text{GHz}/13 = 115.37$ MHz. Every frequency we report is that of a routed design: with worst setup slack WNS at the clock period T, $F_{\max} = 1/(T - \text{WNS})$. None is a median over placement runs or an estimate before routing.

A. Floating-Point Datapath

The floating-point datapath is 2.5 times the area of the integer engine and, placed, is limited by routing rather than by logic depth. With a two-stage FMA the eight-lane engine closed at 78 MHz out of context, with its worst path in the first FMA stage and 58% of the delay in routing. Sharing one divide and square-root unit among the lanes removed 3.7k LUTs and raised this to 84 MHz with the FMA unchanged. A four-lane build reached only 79.7 MHz, which showed that the limit lay inside one lane's FMA rather than in the total area. A three-stage FMA then closed at 100.7 MHz and moved the worst path to the register-file read. In the deployed unit the significand product is fully pipelined on DSP blocks, which makes the unit five stages deep.

B. Memory Path

Adding the L1 and the aggregated AMOs to the board design first missed 100 MHz by 2.478 ns with 16,301 failing endpoints. The worst path was a single-cycle loop of 30 logic levels, 76% of it routing: from the pending-lane masks of a memory context through port arbitration and address selection into the L1 tag compare, the hit, the completion of the context and the warp's resume into the PC of its reconvergence stack. Four changes closed it. The L1 registers its input. A context completes from registered state and the cycle's responses, which is valid for a memory that never answers in the request cycle. The L1 chooses one cycle ahead which waiting read it answers next. A post-route physical optimization pass was added. The input register costs 1.5–2.5% of the total cycles of the applications.

C. Issue Logic and Memory Engine Beyond 100 MHz

With the register scoreboard and the result queues, the board design first closed at 100 MHz with little margin (+0.093 ns at four warps, +0.261 ns at eight). In the routed four-warp design, 38,680 timing endpoints fail at 150 MHz, 12,087 at 125 MHz and about 2,455 at 111 MHz, in four groups: warp issue into the memory engine's context registers, warp issue into the reconvergence stack, the memory engine's request choice into the L1 input register, and the first and last stages of the lane FPUs. Reaching 150 MHz would need an operand-read stage across the whole issue logic, so we cut the four groups instead. The memory engine registers its input, its

TABLE III
BOARD DESIGNS ON THE XCZU9EG-2 AT 115.37 MHZ

Design	LUT	FF	BRAM	DSP	$F_{\max}$ (MHz)	Power[a] (W)
8 lanes, *ser* AMOs	107,658	50,091	16	72	121.0	1.08
8 lanes, no aggregation	106,998	50,036	16	72	120.2	1.16
8 lanes, *par* AMOs	114,446	50,053	16	72	118.7	1.35
4 lanes, *ser* AMOs	[]	[]	[]	[]	[]	[]
16 lanes, *ser* AMOs	[]	[]	[]	[]	[]	[]

Each row is a complete board design (PS, interconnect, accelerator), implemented in context; resources are the whole design's, almost all of them the accelerator's. BRAM counts RAMB36 tiles. [a]Vivado's estimate for the accelerator; the PS adds 2.74 W. Measured power: Section VI-F.

chosen request (the choice among the contexts in one cycle, the line address and data in the next) and the resumption of a warp; a branch or jump updates the reconvergence stack in stage B; and synthesis retiming balances the FPU stages. Together these add 0.3–3.8% to the cycles of the applications, and the board design closes at 115.37 MHz with $+0.406$ ns of slack, an $F_{\max}$ of 121.0 MHz. Its worst path is now inside a lane FPU (34 logic levels, 70% of the delay in routing).

Table III lists the board designs. The default design uses 39% of the device's LUTs and 9% of its flip-flops. Of its 16 block RAMs, all hold the L1's data; the register files, the L1 tags and the scratchpad are in LUTRAM.

VI. EVALUATION

A. Methodology

We wrote seven applications in RISC-V assembly, with one thread per output (Table IV): FP32 matrix multiplication (GEMM), sparse matrix-vector product in compressed sparse row format (SpMV), two sweeps of a five-point Jacobi stencil, the assignment step of k-means with AMO accumulation of the cluster sums, level-synchronous breadth-first search (BFS) with one launch per level and an `amoor` flag, an inclusive prefix sum (scan) built from a block scan with shuffles, block-shared memory and a barrier and a second pass that adds the block totals, and a two-layer INT8 multilayer perceptron (MLP) with `pdot8`, requantization and a rectified linear unit. The generator computes FP32 references with one exact rounding per operation, and every output word is compared bit-exactly.

For SIMTiX, the board top runs in simulation, driven over AXI4-Lite as the A53 drives it, with an AXI4 memory model of 24 cycles of latency, out-of-order responses and random ready stalls. Cycles come from the accelerator's counter, and instructions are the warp instructions issued.

For Vortex we used release 3.0 with one core of four warps of eight threads, RV32IMAF with the A extension, and its defaults otherwise: 16 KB 4-way instruction and data caches with 64-byte lines, a write-back data cache, local memory, and the Xilinx floating-point IP cores. We ported the applications to its `vx_spawn2` interface with the same algorithms, one thread per output and the same order of floating-point operations, compiled them with its LLVM at `-O3`, and checked them against the same references. They

TABLE IV
APPLICATIONS, INPUTS AND RESULTS ON SIMTIX (8 LANES, SIMULATION)

App.	Simulated input	Cycles	IPC	Util.	L1 hit	Board input
GEMM	32^3	45,902	0.69	100%	93%	256^3
SpMV	512^2, $\leq$16/row	26,295	0.43	59%	88%	$65{,}536^2$
Stencil	32^2, 2 sweeps	17,529	0.48	100%	88%	512^2, 4
k-means	1,024, $k = 8$	36,935	0.66	100%	93%	2^{18}, 16
BFS	1,024, degree 6	71,151	0.56	43%	84%	2^{18}, 8
Scan	2,048	34,468	0.50	95%	73%	2^{20}
MLP	784-128-10, 8	433,626	0.48	100%	50%	3 layers, 256

Sizes: GEMM n^3; SpMV rows and nonzeros per row; stencil grid and sweeps; k-means points and clusters; BFS vertices and degree; scan elements; MLP layers and batch (784-256-128-10 on the board). IPC: warp instructions issued per cycle. Util.: lane utilization, the active lanes of the issued warp instructions over eight times their number. L1 hit: read hits over read accesses.

run in Vortex's RTL simulator with its memory behind a 128-bit bus, the width of the HP port, and with the FMA, divide and square-root latencies of the IP cores in the netlist (16, 28 and 28 cycles). Vortex counts its retired warp instructions, including its divergence and predicate instructions.

Both designs are implemented out of context with Vortex's own Vivado script and strategy (performance-optimized synthesis with retiming, extra timing optimization and aggressive physical optimization before and after routing) at a 100 MHz constraint, and their power is estimated vectorless with a toggle rate of 12.5%. Run time is cycles divided by each design's $F_{\max}$, and energy is the power at 100 MHz times the cycles times 10 ns. On the board, the applications run on DRAM-sized inputs (Section VI-F).

B. Memory System and Reduction

We measured the L1 and the memory contexts as they were added, with a set of synchronization kernels and a memory model of fixed latency. With a 20-cycle memory, the L1 makes a 16-bin histogram $5.6\times$ faster, its block-shared form $2.4\times$ and a whole-array sum (a shuffle butterfly and one AMO per warp) $1.5\times$, while reductions that read each line once change by less than 5%. With a 7-cycle memory, four contexts instead of one reduce the cycles of the whole-array sum by 15% and of the histogram by 14%.

In our earlier design without shuffles, a reduction of 1,024 values to one sum per warp took 6,023 cycles through the scratchpad, 1.38 times the 4,363 cycles of the same computation on a five-stage RV32I core at the same clock with single-cycle memory. With a butterfly of three `shfl.xor` steps, which leaves the sum in every lane, the reduction takes 2,911 cycles, 1.50 times faster than that core, and 3,908 cycles behind the L1 and the AXI4 memory model.

C. Line-Aggregated AMOs

Table V gives the cycles of AMO-heavy kernels with and without aggregation. An AMO whose k active lanes fall in g lines costs $2g$ memory requests instead of $2k$. The histogram's 16 bins occupy two lines, and its 128 AMO instructions of $k = 8$ lanes touch both, so with the 128 line loads of its input

TABLE V
CYCLES WITHOUT (BASE) AND WITH LINE-AGGREGATED AMOS

Kernel	Memory	Base	*ser*	*par*	Requests
Histogram	zero latency	4,004	2,234	1,452	2,176 / 640
	7 cycles	11,451	4,365	3,219	
	L1	6,094	3,590	3,177	
	L1 + AXI4	6,635	3,802	3,441	
Contention	L1	1,921	1,175	1,015	488 / 152
	L1 + AXI4	2,305	1,470	1,342	
k-means	L1 + AXI4	47,611	36,935	35,652	—
BFS	L1 + AXI4	71,567	71,151	70,859	—

Histogram: 1,024 values into 16 bins. Contention: 64 threads of colliding `amoadd`, `amomax` and `amoswap`. Requests: global memory requests without and with aggregation. k-means and BFS: Table IV.

aggregation reduces its requests from $128+128\cdot16 = 2{,}176$ to $128 + 128 \cdot 4 = 640$, and its cycles by $1.79\times$ (*ser*) and $2.76\times$ (*par*) at zero memory latency. The gain is largest with a 7-cycle memory ($2.62\times$ and $3.56\times$), where every request saved also saves a round trip, and smaller behind the L1 ($1.70\times$ and $1.92\times$), where reads hit. In k-means each thread adds its point to the x sum, the y sum and the count of its nearest cluster with three AMOs, and aggregation speeds up the application by $1.29\times$ (*ser*). BFS uses an AMO only for its per-level flag and gains less than 1%.

On the board we ran the three bitstreams with 262,144 threads per kernel. Against the design without aggregation, the serial and parallel variants speed up the histogram by $2.47\times$ and $3.17\times$, the contention kernel by $1.80\times$ and $2.06\times$, the block-shared histogram by $1.16\times$ and $1.18\times$, k-means-U by $1.07\times$ and $1.08\times$ and k-means by $1.02\times$; BFS is unchanged. The parallel variant is at most $1.28\times$ faster than the serial one, on the histogram, for 6.3% more LUTs, and less than 1% faster on the applications, so the serial variant remains the default.

Aggregation also changes a standard optimization. Privatizing the histogram in block-shared memory, with one global AMO per bin and block at the end, takes 7,134 cycles behind the L1, while the plain global histogram with aggregation takes 3,590. On the board, with 262,144 values, the two take 1,186,938 and 653,913 cycles. With aggregated global AMOs, privatization no longer pays at this bin count.

D. Comparison With Vortex

Table VI and Fig. 3 compare the two designs. With four warps each, Vortex takes 1.66 to $4.99\times$ the cycles of SIMTiX. The ratio has two factors. Vortex executes 1.08 to 2.20 times the warp instructions, and 3.46 times for the MLP, which has no INT8 dot-product instruction on Vortex; its kernels carry divergence and predicate instructions and compiled loop code where SIMTiX runs hand-written assembly. Vortex also reaches a lower IPC, 0.25 to 0.43 against SIMTiX's 0.43 to 0.69, because four warps do not fill its longer pipeline, while SIMTiX's two-stage pipeline needs only two runnable warps. With 16 warps Vortex's IPC rises to 0.47–0.66, exceeds SIMTiX's on SpMV, the stencil, BFS and scan, and is within

TABLE VI
SIMTIX AND VORTEX, SAME DEVICE AND FLOW (OUT OF CONTEXT, 100 MHZ)

	SIMTiX	Vortex, warps of 8 threads		
	4 warps	4 warps	8 warps	16 warps
LUT	84,443	80,119	91,831	110,158
Flip-flops	31,959	78,613	86,452	98,570
BRAM (RAMB36)	16	46	62	95.5
DSP	72	48	48	48
$F_{\max}$ (MHz)	101.6	140.8	135.9	134.0
Power (W)	1.10	1.70	1.85	2.08
Vortex / SIMTiX, geometric mean over the seven applications				
Warp instructions	—	1.72	1.72	1.73
Cycles	—	2.78	1.80	1.58
Run time	—	2.01	1.34	1.20
Energy	—	4.32	3.04	3.00
SIMTiX / Vortex, geometric mean				
Performance per LUT	—	1.90	1.46	1.57
Performance per watt	—	4.32	3.04	3.00


Performance is the inverse of run time at each design's $F_{\max}$; performance per watt is taken at 100 MHz, where it equals the energy ratio.

4% of it on GEMM, so most of its remaining cycle deficit comes from its instruction count.

Vortex closes at 140.8 MHz, 39% above SIMTiX's 101.6 MHz, and uses 5% fewer LUTs but 2.5 times the flip-flops, 2.9 times the block RAM and 55% more power. In run time, which includes the frequency difference, SIMTiX is $2.01\times$ faster than four-warp Vortex in the geometric mean. Vortex at eight and 16 warps is faster than SIMTiX on GEMM (0.92 and 0.88) and SpMV (0.82 and 0.80), whose regular loops it executes with few extra instructions, while SIMTiX remains faster on BFS ($1.44\times$), scan ($1.12\times$) and the MLP ($2.71\times$) at 16 warps. Those 16 warps cost Vortex 30% more LUTs than SIMTiX and 89% more power. Per LUT, SIMTiX delivers 1.46 to 1.90 times the performance of Vortex, and per watt three to 4.3 times, at every Vortex warp count. The memory model matters little: Vortex's cycles change by at most 9% (the stencil) between its default 64-byte-per-cycle memory and the 128-bit bus with the IP latencies. SIMTiX's frequency in this flow, 101.6 MHz, agrees with the board design's 101.0 MHz.

E. Scaling With the Lane Count

The lane count L is a parameter: it sets the warp width, the line of the memory engine and the L1 (one word per lane, with the L1 kept at 16 KB) and the burst length of the AXI4 master. Fig. 4 shows the speedup over four lanes, with four warps throughout; all seven applications pass their bit-exact checks at every lane count. From eight to 16 lanes GEMM gains $2.03\times$, the MLP $1.95\times$, the stencil $1.88\times$ and k-means $1.86\times$, while scan gains $1.74\times$, SpMV $1.47\times$ and BFS $1.43\times$. GEMM, the stencil, k-means and the MLP keep every lane active, and the scan 95% of them. SpMV and BFS diverge on their row and neighbor loops, where a warp runs until its longest row or adjacency list ends, and their lane utilization falls from 66% and 55% at four lanes to 59% and 43% at eight and 57% and 34% at 16. Their gathers also touch about

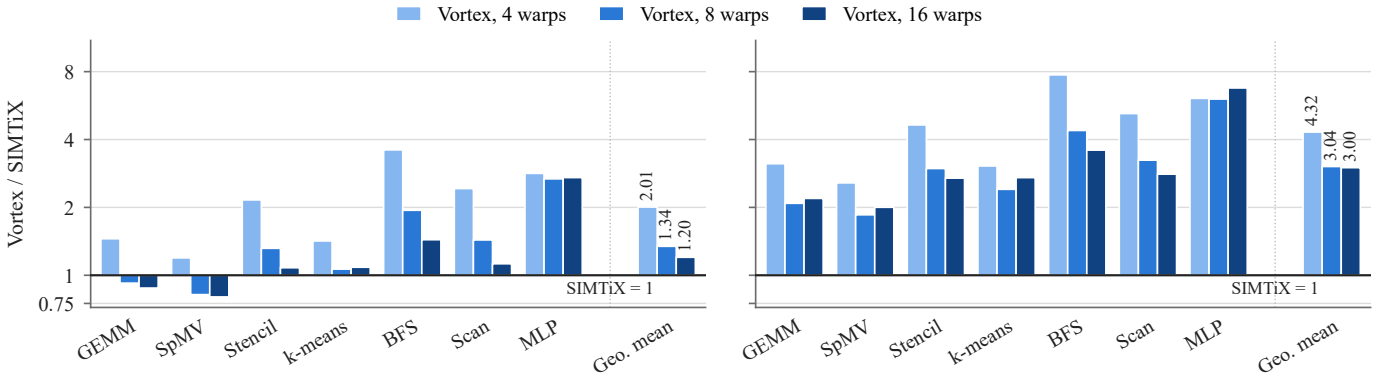

(a) Run time, each design at its F_{max}

(b) Energy at 100 MHz

Fig. 3. Vortex run time (a) and energy (b) relative to SIMTiX for each application and their geometric mean, with Vortex at 4, 8 and 16 warps of eight threads. Run time uses each design's F_{max}; energy uses the vectorless power at 100 MHz. Bars above 1 favor SIMTiX, bars below 1 favor Vortex.

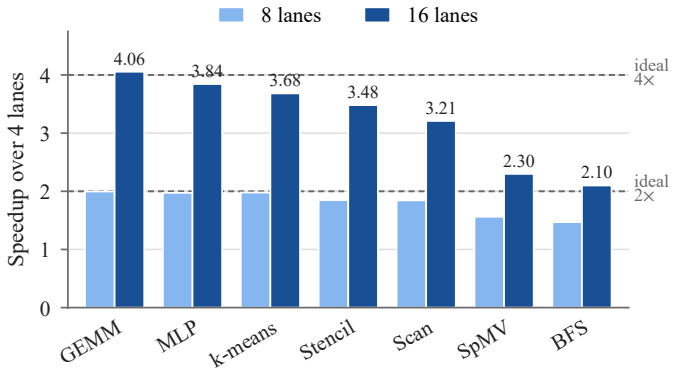


Fig. 4. Speedup of each application at 8 and 16 lanes over a four-lane SIMTiX, with four warps and a 16 KB L1 whose line is one word per lane. Dashed lines mark linear speedup.

one line per lane, and the memory engine sends one request per line: from eight to 16 lanes the warp instructions of SpMV halve, but its L1 accesses fall only from 12,100 to 9,625, and its IPC drops from 0.43 to 0.33.

The cost grows faster than the lane count. Four lanes use 43,119 LUTs at 113.5 MHz and eight lanes 84,443 at 101.6 MHz. Placed, the 16-lane design occupies 190,401 LUTs, 83% of the device and 2.3 times the eight-lane design, and 96% of the device's configurable logic blocks hold some of its logic [routed result]. Each lane's FPU stays at 4.8k LUTs, but the memory engine, implemented alone in its board configuration, grows from 4,645 LUTs at four lanes to 12,576 at eight and 42,474 at 16, by 2.7 and then 3.4 times per doubling; all three meet 100 MHz. The engine selects the word of every lane from a line that itself holds one word per lane, places every lane's store data into that line, and, for the aggregated AMOs, compares the word addresses of every pair of lanes. These structures grow with the square of the lane count. Wider warps are therefore limited by the memory engine rather than by the lanes, and beyond eight lanes more cores, or an engine that serves part of a warp per cycle, are the better way to add throughput.

The 16-lane run also exposed the stack bound of Section III.

TABLE VII
APPLICATIONS ON THE ZCU102: SIMTiX AT 115.4 MHz AGAINST ONE CORTEX-A53 CORE AT 1.2 GHz

App.	A53 (ms)	build	SIMTiX (ms)	Speed-up	Power (W) A53 / SIMTiX	Energy ratio
Hash join	195.4	O3	99.3	1.97	3.13 / 4.12	1.50
CNN	381.8	O3	290.7	1.31	3.11 / 4.00	1.02
GEMM-RB	47.2	O3	37.8	1.25	3.17 / 4.22	0.94
Embedding bag	45.4	O3	37.5	1.21	3.12 / 4.05	0.94
BFS	194.6	O3	162.9	1.19	3.13 / 3.88	0.96
SpMV-Z	18.1	O3	19.4	0.94	3.17 / 4.08	0.73
Mandelbrot	845.7	O3	1,019.7	0.83	3.12 / 4.19	0.62
Smith-Waterman	922.1	O2	1,613.4	0.57	3.16 / 3.83	0.47
k-means-U	34.3	O3	72.2	0.47	3.11 / 3.86	0.38
Stencil-RB	8.6	O3	18.9	0.45	3.20 / 4.26	0.34
MLP	55.4	O3	189.8	0.29	—	—
Segmented scan	4.5	O3	35.5	0.13	3.27 / 3.91	0.11

Large inputs: hash join 2^{22} slots, 2^{20} probes; CNN 128^2, 16-32-32 channels; GEMM 256^3; embedding bag 2^{18} rows of 32 floats, 4,096 bags of 32; BFS 2^{18} vertices; SpMV 65,536 rows; Mandelbrot 1024^2, 256 iterations; Smith-Waterman 16,384 pairs of 32 and 128 bases; k-means 2^{18} points, 16 clusters; stencil 512^2, 4 sweeps; MLP 784-256-128-10, batch 256; scan 2^{20}. A53: the faster of the `-O2` and `-O3 -mcpu=cortex-a53` builds. Power: sum of the 18 monitored rails while the application runs. Energy ratio: A53 energy over SIMTiX energy, each run time times total power; above 1 favors SIMTiX.

Our stack had eight frames, which by the bound suffices for eight lanes. In SpMV at 16 lanes, a warp whose rows have more than eight different lengths leaves its loop at more than eight different iterations, pushing a frame each time, and overflowed the stack. Sizing the stack by the lane count removed the failure; at eight lanes the design is unchanged.

F. Measurements on the Board

The host program runs every application on its large input, first on the accelerator and then on one A53 core with an ordinary sequential algorithm in C: a queue for BFS, a running sum for the scan, the *i*-*k*-*j* loop order for GEMM, and for the CNN and the MLP the usual CPU layouts (channels and the dot products' operands contiguous). We built the references with `-O2` and with `-O3 -mcpu=cortex-a53`, with which GCC vectorizes with NEON, and report the faster build. They

are compiled C, not a hand-tuned library. The FP32 references perform the kernels' operations in the same order, so every output of the accelerator is compared exactly with the A53's; both builds produce the same results. Times come from the A53's global timer; the accelerator time runs from the first GO to the last DONE and includes the host's work between launches. For power, each phase (idle, accelerator, A53) is repeated for 2 s, and between repetitions, at most every 50 ms, the host reads the board's 18 INA226 monitors over I^2C, ten on the processing system's rails and eight on the programmable logic's.

Table VII gives the results. SIMTiX is faster than the A53 on five applications. Three are limited by memory latency: the hash-join probe ($1.97\times$), the embedding bag ($1.21\times$) and BFS ($1.19\times$) gather from random lines of tables far larger than the A53's 1 MB L2 cache, and the in-order A53 waits on each miss, while SIMTiX keeps 64 threads and 16 misses in flight. The other two, the CNN ($1.31\times$) and the register-blocked GEMM ($1.25\times$), reuse each loaded operand several times per thread. SIMTiX is slower on kernels with little work per element (the scan, the stencil, k-means), on scalar dynamic programming (Smith-Waterman, $0.57\times$), on Mandelbrot ($0.83\times$), and on the MLP, whose contiguous INT8 dot products the A53 vectorizes. With one output per thread, the MLP kernel issues 0.32 G multiply-adds per second, against 0.78 G for the CNN kernel, which computes four.

The energy is less favorable. With every rail counted, the board draws 3.13–3.17 W idle with the A53 polling the accelerator, 3.11–3.27 W while the A53 computes and 3.62–4.26 W while SIMTiX runs: the accelerator's switching adds 0.5–1.1 W, the A53's computation 0.05–0.2 W, because the idle phase already keeps the A53 busy. SIMTiX therefore uses less total energy only on the hash join ($1.50\times$), and about the same on the CNN, BFS, the embedding bag and GEMM. If only the power above idle were counted, the comparison would charge the accelerator its whole switching power and the A53 almost none; we report the total. [Vortex, CVA6 and Ara on the same board.]

G. Rodinia on Four Machines

We ran four applications of Table VII (GEMM, SpMV, the CNN and Mandelbrot) and eight benchmarks of the Rodinia suite [19] on four machines, each a separate bitstream for the same ZCU102. Besides SIMTiX, they are Vortex in the configuration of Section VI-D, one core of eight warps of eight threads, at 125 MHz; Ara [20], [21], a RISC-V vector processor of the RVV 1.0 extension, with two lanes and 2,048-bit vector registers; and CVA6 [22], the 64-bit RISC-V core that issues Ara's instructions, running scalar code without the vector unit. Ara and CVA6 form one design, which closes at 78.95 MHz. In every run the A53 loads the program, loads or generates the inputs, computes the reference results and checks every output.

The four applications use the inputs and the A53 references of Table VII. Each Rodinia benchmark is defined by Rodinia's computation on Rodinia's data: the sequence of FP32 operations that produces one output, each rounded once, with a fused multiply-add where the sum is fused. Every machine performs these operations in this order, in its own parallel form: one output per thread on SIMTiX and Vortex, per vector element on Ara and per loop iteration on CVA6 and the A53. The SIMTiX kernels are hand-written assembly. Vortex runs C++ versions of the same algorithms compiled by its LLVM toolchain; Ara runs C with vector intrinsics; CVA6 and the A53 run one C reference, compiled with GCC. The input files are Rodinia's own. Work that Rodinia performs on the CPU (the control of the bfs levels, the selection of the nearest records in nn, the centre update of kmeans and the back substitution of gaussian) runs on the A53 for every machine and is not timed. For SIMTiX and Vortex, the A53's timer measures from the first launch to the end of the last, including the host's work between launches; for CVA6 and Ara, the cycle counter of CVA6 measures the kernel, whose loop over iterations runs on CVA6 itself.

Three choices depart from Rodinia's default runs. All machines compute in FP32. backprop uses 2^{19} inputs rather than 2^{21}, whose two 256 MB weight arrays do not fit the memory region of the Ara host. gaussian uses the matrix that Rodinia generates rather than its matrix file: Rodinia eliminates without pivoting, and on the random matrix of the file the entries grow to 5.3×10^4, so that a change of one ulp in 8.7% of the quotients changes rows of the result by up to 6.3 times their largest entry. This matters because the divide and square-root unit of CVA6, which Ara shares, is not correctly rounded: on 4,096 random operands, 8.7% of its quotients and 6.9% of its square roots differ from the correctly rounded value by one ulp. CVA6 and Ara are therefore checked within a tolerance in the two benchmarks that divide or take a square root, and exactly in the others. Finally, Ara computes gaussian's multipliers (Rodinia's Fan1 kernel, one division per row) on CVA6, because its vector form returned wrong values, or deadlocked, when it ran after nn; the elimination itself (Fan2) runs on Ara.


Table VIII gives the results and Fig. 5 shows the ratios of the Rodinia benchmarks. On the four applications SIMTiX is faster than every other machine: by 10.9 to $97.7\times$ than CVA6, 2.05 to $16.2\times$ than Ara and 2.39 to $7.11\times$ than Vortex. Over all twelve benchmarks the geometric means of the time ratio are $19.9\times$ for CVA6, $3.32\times$ for Ara and $2.63\times$ for Vortex. On Rodinia, SIMTiX is faster than CVA6 on every benchmark, by $14.6\times$ in time on the geometric mean and $10.0\times$ per cycle. It is $2.62\times$ faster than Ara in time and $1.79\times$ per cycle; the largest margins are on bfs ($21.7\times$) and backprop ($10.2\times$). On the hotspot stencil, whose rows Ara loads with unit stride, Ara comes within $1.3\times$ of SIMTiX in time and needs 8 to 12% fewer cycles. Against Vortex, which runs the same algorithms, SIMTiX is $1.98\times$ faster in time and $2.15\times$ per cycle, from $1.22\times$ on gaussian to $3.84\times$ on pathfinder.

nn is the one benchmark on which SIMTiX is slower than Ara and Vortex. It computes one square root per record and little else. SIMTiX computes square roots in its single shared divide unit, through which the active lanes pass in turn (Section III), and needs 41 cycles per record; Vortex has one square-root unit per lane, and Ara applies its square-root instruction to whole vectors. The A53, at 10.4 times SIMTiX's

TABLE VIII
APPLICATIONS AND RODINIA ON THE ZCU102: TIME OF SIMTIX, CVA6, ARA, VORTEX AND THE A53, AND EACH TIME DIVIDED BY SIMTIX'S

Benchmark	Input	SIMTiX	CVA6		Ara		Vortex		A53	
		(ms)	(ms)	ratio	(ms)	ratio	(ms)	ratio	(ms)	ratio
Applications of Table VII										
GEMM-RB	256^3	37.8	3,689.7	97.7	77.4	2.05	198.2	5.25	169.6	4.49
SpMV-Z	65,536 rows	19.3	362.3	18.7	313.2	16.2	46.2	2.39	18.3	0.95
CNN	128^2, 16-32-32 channels	290.7	27,266.5	93.8	1,581.3	5.44	2,066.4	7.11	1,191.9	4.10
Mandelbrot	1024^2, 256 iterations	1,019.7	11,142.5	10.9	4,553.5	4.47	5,324.0	5.22	846.8	0.83
Rodinia										
pathfinder	100 rows, 100,000 columns	250.5	4,428.8	17.7	421.2	1.68	960.9	3.84	97.2	0.39
backprop	2^{19} inputs, 16 hidden	299.2	5,729.0	19.1	3,055.4	10.2	1,008.8	3.37	214.2	0.72
bfs	graph65536	36.7	299.8	8.17	794.1	21.7	126.8	3.46	21.9	0.60
hotspot	512^2, 2 iterations	33.6	553.1	16.5	45.3	1.35	103.0	3.07	21.0	0.63
hotspot	1024^2, 2 iterations	134.2	2,475.0	18.4	172.8	1.29	411.2	3.06	85.5	0.64
nn	42,764 records	15.3	24.4	1.59	8.9	0.58	4.8	0.31	1.0	0.07
hotspot3D	$512^2 \times 8$, 100 iterations	9,449.6	491,642.8	52.0	20,528.6	2.17	21,504.5	2.28	16,522.7	1.75
gaussian	1024×1024	4,965.0	104,642.3	21.1	10,176.9	2.05	6,064.0	1.22	3,916.4	0.79
kmeans	kdd_cup, $k = 5$, 37 iterations	31,810.0	726,014.0	22.8	56,290.0	1.77	64,442.3	2.03	28,064.9	0.88
Geometric mean of the ratio, Rodinia, time				14.6		2.62		1.98		0.56
Geometric mean of the ratio, Rodinia, clock cycles				9.97		1.79		2.15		—
Geometric mean of the ratio, all twelve, time				19.9		3.32		2.63		0.85
Geometric mean of the ratio, all twelve, clock cycles				13.6		2.27		2.85		—

Clocks: SIMTiX 115.4 MHz, CVA6 and Ara 78.95 MHz, Vortex 125 MHz, A53 1.2 GHz. Ratio: the machine's time (or cycles) divided by SIMTiX's; above 1 favors SIMTiX. Geometric means with hotspot at 1024^2. SIMTiX runs the GEMM-RB and SpMV-Z kernels of Table VII; Vortex runs SIMTiX's base GEMM and SpMV kernels, ported. A53: the `-O2` reference (Table VII gives the faster of `-O2` and `-O3`). Every output is checked against the A53 reference: exact for SIMTiX and Vortex; for CVA6 and Ara exact except nn (at most 1 ulp) and gaussian (at most 2.2×10^{-4} of each row's largest value; limit 10^{-3}).

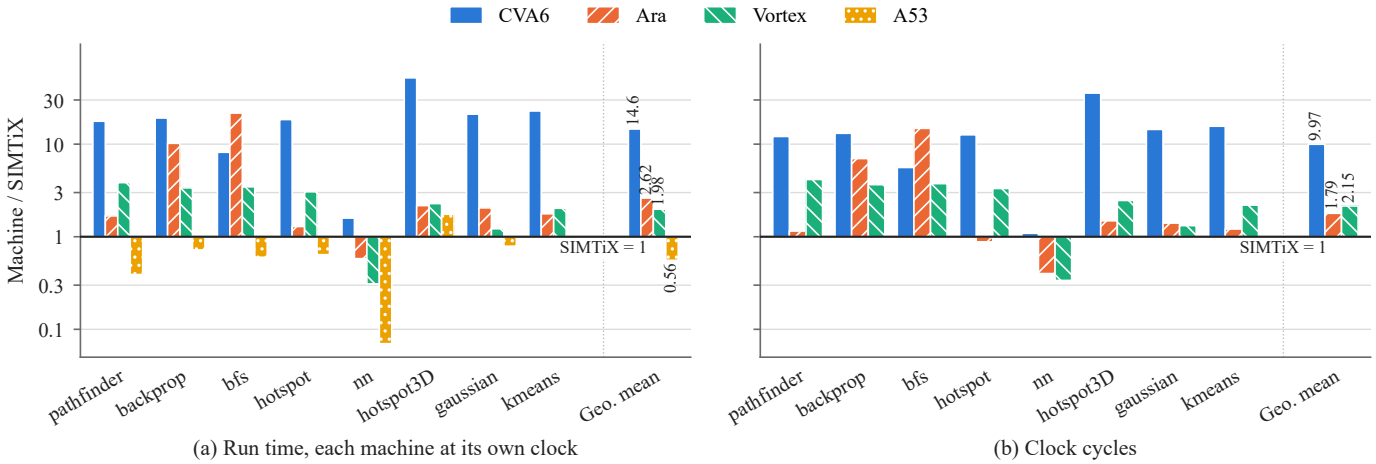

(a) Run time, each machine at its own clock

(b) Clock cycles

Fig. 5. Rodinia on the ZCU102. (a) Run time of CVA6, Ara, Vortex and the A53, each at its own clock, divided by SIMTiX's run time. (b) Clock cycles of CVA6, Ara and Vortex divided by SIMTiX's cycles. Bars above 1 favor SIMTiX; the axis is logarithmic, and the last group is the geometric mean over the eight benchmarks (Table VIII).

clock, is faster than SIMTiX on seven of the eight benchmarks; SIMTiX is faster on hotspot3D (1.75×), whose two 8 MB grids are read and written in every iteration.

VII. LIMITATIONS

SIMTiX trades frequency for IPC. Its two-stage pipeline reads the LUTRAM RFs and decodes in the issue cycle, and its critical paths are the stage-0 addition of the FPU and the issue logic; Vortex's deeper pipeline closes at a 39% higher frequency but needs more warps to fill. The power in the Vortex comparison is a vectorless estimate for both designs; the board measurements cover SIMTiX and the A53 only. SIMTiX has no compiler: its kernels are hand-written assembly, while Vortex's are compiled by LLVM, so part of Vortex's 1.72 times instruction count reflects compiled code rather than the instruction set; the IPC comparison divides this effect out. Both designs were evaluated as single cores; multi-core configurations, which Vortex supports with an L2 cache and an OpenCL stack, were not. The AMOs exclude load-reserved and store-conditional.

VIII. CONCLUSION

This paper describes the architecture and implementation of SIMTiX, a SIMT accelerator of eight lanes and four

warps for FPGA systems-on-chip. It includes a non-blocking L1, a multi-context memory engine, AXI4 access to DDR4, shuffles, barriers, atomics and FP32/FP16 arithmetic in 81k LUTs of a mid-size device, and the complete board design closes timing at 101.0 MHz. Line-aggregated AMOs serve all lanes of an atomic that share a line with one read and one write while preserving the results of serial execution, which reduces the memory requests of a histogram by $3.4\times$ for 2,551 LUTs. On the same device and flow as Vortex with the same geometry, SIMTiX runs seven applications in $2.01\times$ less time and with $4.3\times$ less estimated energy; Vortex closes at a higher frequency and overtakes SIMTiX on regular kernels only with 16 warps and 30% more LUTs. Beyond eight lanes the memory engine grows almost with the square of the lane count, so wider SIMT engines on FPGAs should add cores or serve part of a warp per cycle rather than widen the warp. [one sentence with the board result.]

ACKNOWLEDGMENT

The authors used a large language model (Anthropic Claude) to assist with build and analysis scripting and with editing this manuscript. The design, the experiments and their interpretation are the authors' own, and the authors checked every reported result.

REFERENCES

[1] E. Lindholm, J. Nickolls, S. Oberman, and J. Montrym, "NVIDIA Tesla: A unified graphics and computing architecture," *IEEE Micro*, vol. 28, no. 2, pp. 39–55, Mar. 2008.

[2] T. M. Aamodt, W. W. L. Fung, and T. G. Rogers, *General-Purpose Graphics Processor Architectures*. San Rafael, CA, USA: Morgan & Claypool, 2018.

[3] B. Tine, K. P. Yalamarthy, F. Elsabbagh, and H. Kim, "Vortex: Extending the RISC-V ISA for GPGPU and 3D-graphics," in *Proc. IEEE/ACM Int. Symp. Microarchitecture (MICRO)*, 2021, pp. 754–766.

[4] J. Li *et al.*, "RISC-V-based GPGPU with vector capabilities for high-performance computing," *IEEE Trans. Very Large Scale Integr. (VLSI) Syst.*, vol. 33, no. 8, pp. 2239–2252, Aug. 2025.

[5] M. Langhammer and G. A. Constantinides, "eGPU: A 750 MHz class soft GPGPU for FPGA," in *Proc. Int. Conf. Field-Programmable Logic Appl. (FPL)*, 2023.

[6] K. Andryc, M. Merchant, and R. Tessier, "FlexGrip: A soft GPGPU for FPGAs," in *Proc. Int. Conf. Field-Programmable Technol. (FPT)*, 2013.

[7] M. Al Kadi, B. Janssen, and M. Hübner, "FGPU: An SIMT-architecture for FPGAs," in *Proc. ACM/SIGDA Int. Symp. Field-Programmable Gate Arrays (FPGA)*, 2016, pp. 254–263.

[8] R. Balasubramanian *et al.*, "Enabling GPGPU low-level hardware explorations with MIAOW: An open-source RTL implementation of a GPGPU," *ACM Trans. Archit. Code Optim.*, vol. 12, no. 2, 2015.

[9] J. Bush, P. Dexter, T. N. Miller, and A. Carpenter, "Nyami: A synthesizable GPU architectural model for general-purpose and graphics-specific workloads," in *Proc. IEEE Int. Symp. Perform. Anal. Syst. Softw. (ISPASS)*, 2015.

[10] S. Collange, "Simty: Generalized SIMT execution on RISC-V," in *Proc. Workshop Comput. Archit. Res. RISC-V (CARRV)*, 2017.

[11] W. W. L. Fung, I. Sham, G. Yuan, and T. M. Aamodt, "Dynamic warp formation and scheduling for efficient GPU control flow," in *Proc. IEEE/ACM Int. Symp. Microarchitecture (MICRO)*, 2007, pp. 407–420.

[12] NVIDIA, "NVIDIA's next generation CUDA compute architecture: Fermi," White Paper, 2009.

[13] Y. H. Chou, C. Ng, S. Cattell, J. Intan, M. D. Sinclair, J. Devietti, T. G. Rogers, and T. M. Aamodt, "Deterministic atomic buffering," in *Proc. IEEE/ACM Int. Symp. Microarchitecture (MICRO)*, 2020, pp. 981–995.

[14] S. Franey and M. Lipasti, "Accelerating atomic operations on GPGPUs," in *Proc. IEEE/ACM Int. Symp. Networks-on-Chip (NOCS)*, 2013, pp. 1–8.

[15] A. Mukkara, N. Beckmann, and D. Sanchez, "PHI: Architectural support for synchronization- and bandwidth-efficient commutative scatter updates," in *Proc. IEEE/ACM Int. Symp. Microarchitecture (MICRO)*, 2019, pp. 1009–1022.

[16] A. Adinets, "CUDA pro tip: Optimized filtering with warp-aggregated atomics," NVIDIA Developer Blog, Oct. 2014.

[17] S. A. Figueroa, "When is double rounding innocuous?" *ACM SIGNUM Newsl.*, vol. 30, no. 3, pp. 21–26, 1995.

[18] *IEEE Standard for Floating-Point Arithmetic*, IEEE Std 754-2019, 2019.

[19] S. Che, M. Boyer, J. Meng, D. Tarjan, J. W. Sheaffer, S.-H. Lee, and K. Skadron, "Rodinia: A benchmark suite for heterogeneous computing," in *Proc. IEEE Int. Symp. Workload Characterization (IISWC)*, 2009, pp. 44–54.

[20] M. Cavalcante, F. Schuiki, F. Zaruba, M. Schaffner, and L. Benini, "Ara: A 1-GHz+ scalable and energy-efficient RISC-V vector processor with multiprecision floating-point support in 22-nm FD-SOI," *IEEE Trans. Very Large Scale Integr. (VLSI) Syst.*, vol. 28, no. 2, pp. 530–543, Feb. 2020.

[21] M. Perotti, M. Cavalcante, R. Andri, L. Cavigelli, and L. Benini, "Ara2: Exploring single- and multi-core vector processing with an efficient RVV 1.0 compliant open-source processor," *IEEE Trans. Comput.*, 2024.

[22] F. Zaruba and L. Benini, "The cost of application-class processing: Energy and performance analysis of a Linux-ready 1.7-GHz 64-bit RISC-V core in 22-nm FDSOI technology," *IEEE Trans. Very Large Scale Integr. (VLSI) Syst.*, vol. 27, no. 11, 2019.