

5G NR LDPC Encoder and Decoder

YADATI KRISHNA

CONTENTS

| | | |
|----------|-------------------------------------|----------|
| 1 | Introduction | 1 |
| 2 | 5G NR LDPC Encoder | 1 |
| 2.1 | 5G-NR LDPC Channel coding | 1 |
| 2.2 | LDPC Base Graphs | 2 |
| 2.3 | LDPC Base Graph selection procedure | 2 |

1. INTRODUCTION

5G NR (New Radio) is the latest wireless communication standard that supports higher data rates, lower latency, and increased reliability. LDPC (Low-Density Parity-Check) is a forward error correction (FEC) technique used in 5G NR to improve the reliability of data transmission.

5G NR (New Radio) uses Low-Density Parity-Check (LDPC) codes for forward error correction (FEC) to improve the reliability of data transmission over wireless channels. LDPC codes are linear block codes that have a sparse parity-check matrix. The parity-check matrix is designed to have a low density of 1's, which means that only a small fraction of the bits in the matrix are 1's.

The 5G NR LDPC codes are designed to have a high coding gain and low error rates while maintaining low latency and complexity. The coding gain is the ratio of the signal-to-noise ratio (SNR) required for a non-coded system to achieve a certain bit error rate (BER) compared to the SNR required for a coded system to achieve the same BER. The higher the coding gain, the more robust the code is against channel noise and interference.

The 5G NR LDPC codes are specified by the 3GPP (Third Generation Partnership Project) and include several code rates ranging from 1/5 to 5/6. The code rates determine the amount of redundancy added to the original data to create the codeword. Higher code rates add more redundancy, which results in a more robust code but also increases the latency of the transmission.

The 5G NR LDPC codes have a block size of 8448 bits and are designed to be flexible and adaptable to different channel conditions. The code rate and the number of iterations used in the decoding process can be adjusted based on the channel conditions to optimize the trade-off between coding gain, latency, and complexity.

Overall, the 5G NR LDPC codes are a crucial component of the 5G NR communication system, and their performance

has a significant impact on the reliability and efficiency of data transmission over wireless channels.

2. 5G NR LDPC ENCODER

The 5G NR (New Radio) encoder is responsible for encoding information bits into a larger codeword to improve the reliability of data transmission. The 5G NR standard uses a specific type of forward error correction (FEC) technique called LDPC (Low-Density Parity-Check) for error correction. The 5G NR LDPC encoder adds redundant bits to the original information bits to create the codeword.

The 5G NR LDPC encoder uses a parity-check matrix to determine the redundant bits to add to the information bits. The matrix is designed to have a low-density of 1's, which means that only a small fraction of the bits in the matrix are 1's. This reduces the complexity of the encoder and decoder while still providing high coding gain and low error rates.

The 5G NR LDPC encoder can operate at different code rates, which determines the amount of redundancy added to the information bits. The higher the code rate, the more redundancy is added, which results in a more robust codeword but also increases the latency of the transmission.

The 5G NR encoder also includes other features such as rate matching and code block segmentation. Rate matching is used to adjust the size of the codeword to match the modulation and channel coding scheme used for transmission. Code block segmentation is used to divide the information bits into smaller code blocks, which can be processed and encoded separately.

Overall, the 5G NR encoder is a critical component of the communication system, and its performance impacts the reliability and efficiency of data transmission over 5G networks.

A. 5G-NR LDPC Channel coding

Based on my interpretation from [3GPP Specification 38.212](#) Rel 15 (Multiplexing and channel coding), I had put together the procedure on how LDPC Base Graph selection and coding happens.

- 1) For transmission of a DL transport block , a transport block CRC is first appended to provide error detection, followed by a LDPC base graph selection.
- 2) NR supports two LDPC base graphs, one for small transport blocks and one for larger transport blocks.
- 3) Then transport block is segmented into code blocks and code block CRC attachment is performed.

- 4) Each code block is individually LDPC encoded. The LDPC coded blocks are then individually rate matched.
- 5) Finally, code block concatenation is performed to create a codeword for transmission. Up to 2 code words can be transmitted simultaneously.

B. LDPC Base Graphs

There are two types of Base Graphs standardized in the specification, [3GPP Specification 38.212](#) (Multiplexing and channel coding). Base Graph is a Matrix where each of the entries can be further expanded based on the expansion factor Z_c .

- 1) Base Graph 1 (BG1) : With Matrix size 46X68 entries For Large Transport Block.

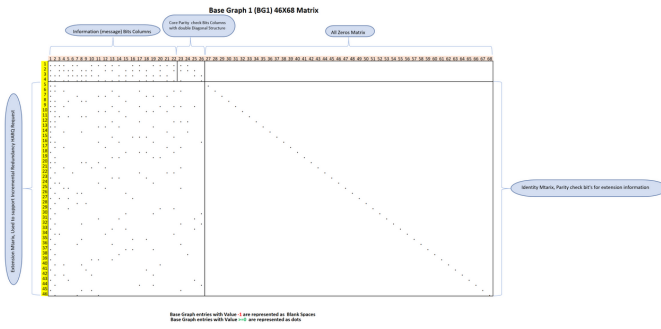


Fig. 1: High Level Visualization of fully Populated BG1 Matrix

- 2) Base Graph 2 (BG2) : With matrix size 42X52 entries For Smaller Transport Block.

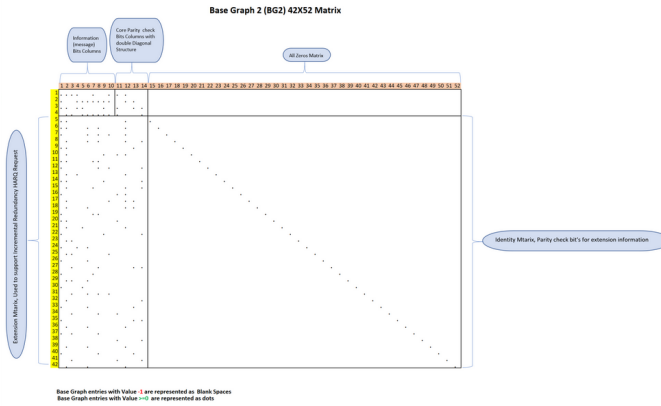


Fig. 2: High Level Visualization of fully Populated BG2 Matrix

C. LDPC Base Graph selection procedure

I have put together the following example of constructing the LDPC parity check matrix for a given information block size K and code rate $R = K/N$.

For simplicity I have considered a small TBS of size 20bits to illustrate below example, $K=20$ and $R=0.25$

- 1) Obtain the base graph BG1 or BG2 for the given K (Transport Block)and R (Code Rate), Refer [3GPP Specification 38.212](#) for LDPC base graph selection. As per the specification

- a) if $K \leq 3824$ and $R \leq 0.67$ then BG2 is selected.
- b) If $K \leq 292$ then BG2 is selected
- c) if $R \leq 0.25$ then BG2 is selected.
- d) Else BG1 is selected

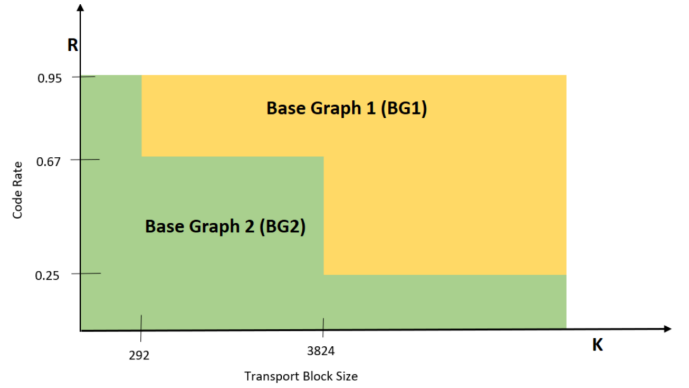


Fig. 3: Graphical Representation of Base Graph Selection

- 2) Determine the value of K_b for the given K (Transport Block) and R (Code Rate) Ref [3GPP Specification 38.212, 5.2.2](#)

K_b denotes the number of information bit columns for the lifting size Z_c .

As per the Specification

For LDPC BG1:

- a) $K_b = 22$

For LDPC BG2:

- a) if K is between $640 < K \leq 3824$ then $K_b = 10$
- b) if K is between $560 < K \leq 640$ then $K_b = 9$
- c) if K is between $192 < K \leq 560$ then $K_b = 8$
- d) If K is ≤ 192 then $K_b = 6$

- 3) Determine the base matrix expansion factor Z_c by selecting the minimum Z_c value in below Table, such that $K_b * Z_c \geq K$
Sets of LDPC lifting size Z_c in the specification I have

populated below Z_c table.

| Z_c | 2 | 3 | 5 | 7 | 9 | 11 | 13 | 15 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|
| 0 | 2 | 3 | 5 | 7 | 9 | 11 | 13 | 15 |
| 1 | 4 | 6 | 10 | 14 | 18 | 22 | 26 | 30 |
| 2 | 8 | 12 | 20 | 28 | 36 | 44 | 52 | 60 |
| 3 | 16 | 24 | 40 | 56 | 72 | 88 | 104 | 120 |
| 4 | 32 | 48 | 80 | 112 | 144 | 196 | 208 | 240 |
| 5 | 64 | 96 | 160 | 224 | 288 | | | |
| 6 | 128 | 192 | 320 | | | | | |
| 7 | 256 | 384 | | | | | | |

$Z_c = a \cdot 2^j$

For $K=20$, $Z_c = 4$, this satisfies the condition $K_b \cdot Z_c \geq K$, $6 \cdot 4 = 24 \geq 20$ and this is the minimum Z_c value from the above table that satisfies this condition.

- 4) After Z_c is determined, the corresponding shift coefficient matrix set need to be selected from below Table., Ref for this table is [3GPP Specification 38.212,5.3.2](#)