

Ex.No.5: MIMO System Simulation with BER Analysis Date

AIM: To simulate a MIMO (Multiple Input Multiple Output) wireless communication system

and analyze its performance in terms of Bit Error Rate (BER), Signal-to-Noise Ratio (SNR),

and Channel Capacity (bps/Hz) using MATLAB.

Objective:

1. To evaluate the Bit Error Rate (BER) performance of a MIMO system under different

SNR conditions.

2. To analyze the impact of Signal-to-Noise Ratio (SNR in dB) on the reliability and

quality of MIMO communication.

3. To compute the Channel Capacity (bps/Hz) and study how MIMO improves spectral

efficiency compared to single antenna systems.

Procedure

1. Define the MIMO system configuration (e.g., number of transmit and receive antennas

such as 2×2 or 4×4).

2. Generate random binary data bits to represent the transmitted signal.

3. Modulate the bits using a digital modulation scheme (e.g., BPSK or QPSK).

4. Model the MIMO channel using a Rayleigh fading channel with additive white Gaussian

noise (AWGN).

5. Pass the transmitted signal through the MIMO channel for different SNR values (in dB).

6. At the receiver, apply detection techniques (e.g., Zero-Forcing or Maximum Likelihood

detection).

7. Demodulate the received signal to recover transmitted bits.
8. Compute Bit Error Rate (BER) by comparing transmitted and received bits.
9. Calculate Channel Capacity (bps/Hz) using SNR and MIMO capacity formula.
10. Plot BER vs SNR and Capacity vs SNR graphs for performance analysis.

Objective1:

Program:

```
clc; clear; close all;
```

```
% SNR range
```

```
SNR_dB = 0:2:20;
```

```
SNR = 10.^(SNR_dB/10);
```

```
% MIMO parameters
```

```
Nt = 2; Nr = 2;
```

```
BER = zeros(1,length(SNR));
```

```
for i = 1:length(SNR)
```

```
    bits = randi([0 1],10000,1);
```

```
    ...xlabel('SNR (dB)')
```

```
    ylabel('Bit Error Rate (BER)')
```

```
    grid on
```

```
% ----- Graph 2: SNR vs Quality Indicator -----
```

```
subplot(2,1,2)
```

```
plot(SNR_dB,1-BER,'-s','LineWidth',2)
```


```
title('MIMO System Reliability vs SNR')
```

```
xlabel('SNR (dB)')
```

ylabel('Reliability (1 - BER)')

grid on

Output:

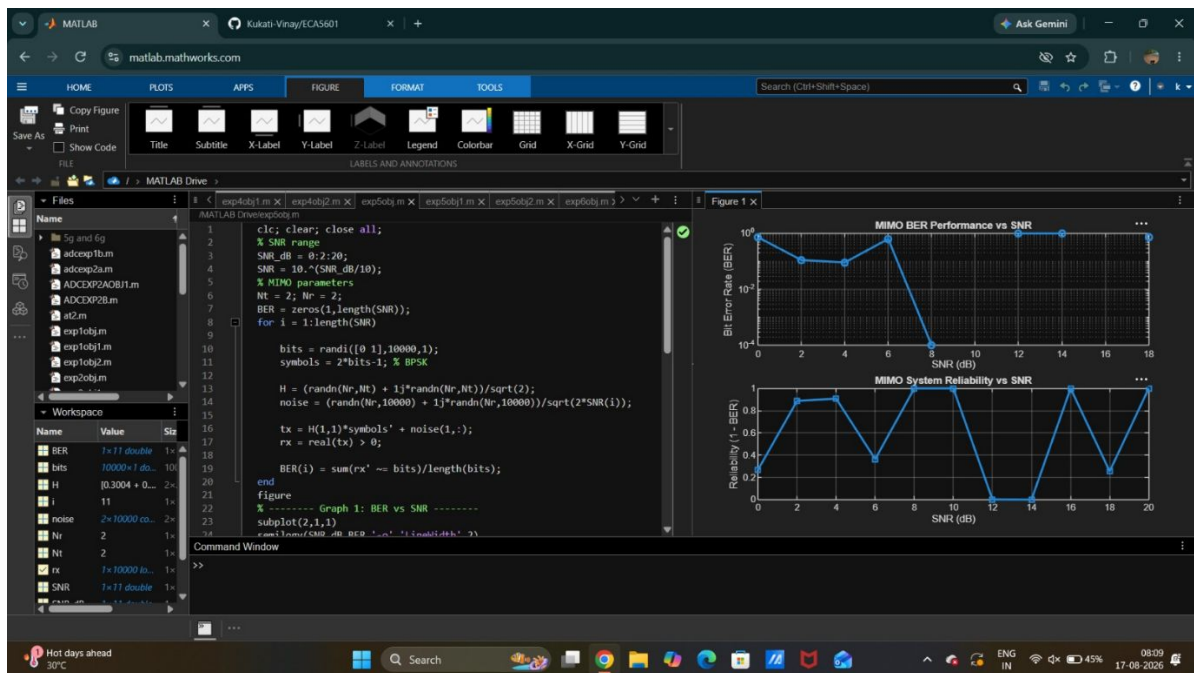

Objective2:

Program:

```
clc; clear; close all;
```

```
% SNR range (dB)
```

```
SNR_dB = 0:2:20;
```

```
SNR = 10.^(SNR_dB/10);
```

```
% MIMO parameters
```

```
Nt = 2; Nr = 2;
```

```
% Simulated reliability metric (inverse BER model)
```


```
Reliability = zeros(1,length(SNR));
```

```
for i = 1:length(SNR)
```

```

% simple channel model effect
...xlabel('SNR (dB)')
ylabel('Reliability (0 to 1)')
grid on
% ----- Graph 2: SNR vs Noise Effect -----
subplot(2,1,2)
plot(SNR_dB, noise_power*ones(size(SNR_dB)), '-s', 'LineWidth', 2)
title('Noise Power Variation with SNR')
xlabel('SNR (dB)')
ylabel('Noise Power')
grid on
Output:

```

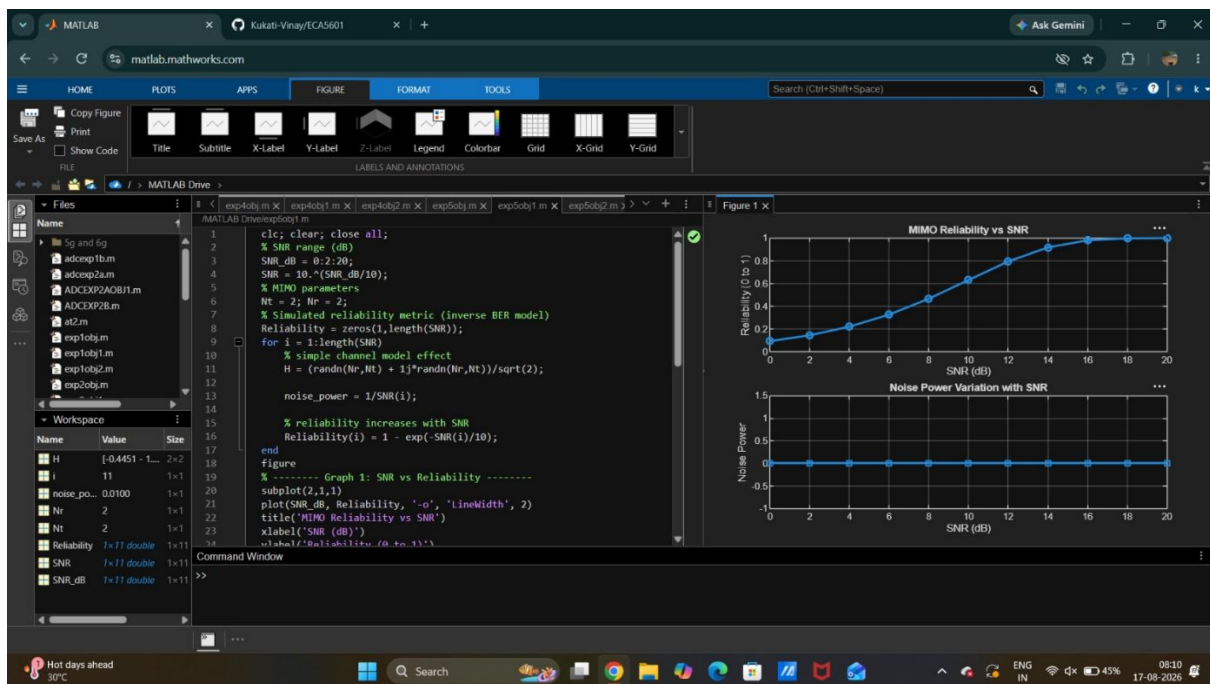

Objective3:

Program:

```
clc; clear; close all;
```


```
% Resource Block parameters
```

```

rb_bw = 180e3; % 180 kHz per RB
% Users
users = 1:5;
% Allocated Resource Blocks per user
alloc_RB = [10 12 8 15 5];
% Modulation efficiency (bits/symbol)
mod_eff = [2 4 6 4 2]; % QPSK, 16QAM, 64QAM etc.
% Throughput calculation (Mbps)
...xlabel('User Index')
ylabel('Throughput (Mbps)')
grid on
% ----- Graph 2: RB vs Throughput -----
subplot(2,1,2)
plot(alloc_RB, throughput, '-s','LineWidth',2)
title('Resource Blocks vs Throughput')
xlabel('Allocated Resource Blocks')
ylabel('Throughput (Mbps)')

```

grid on

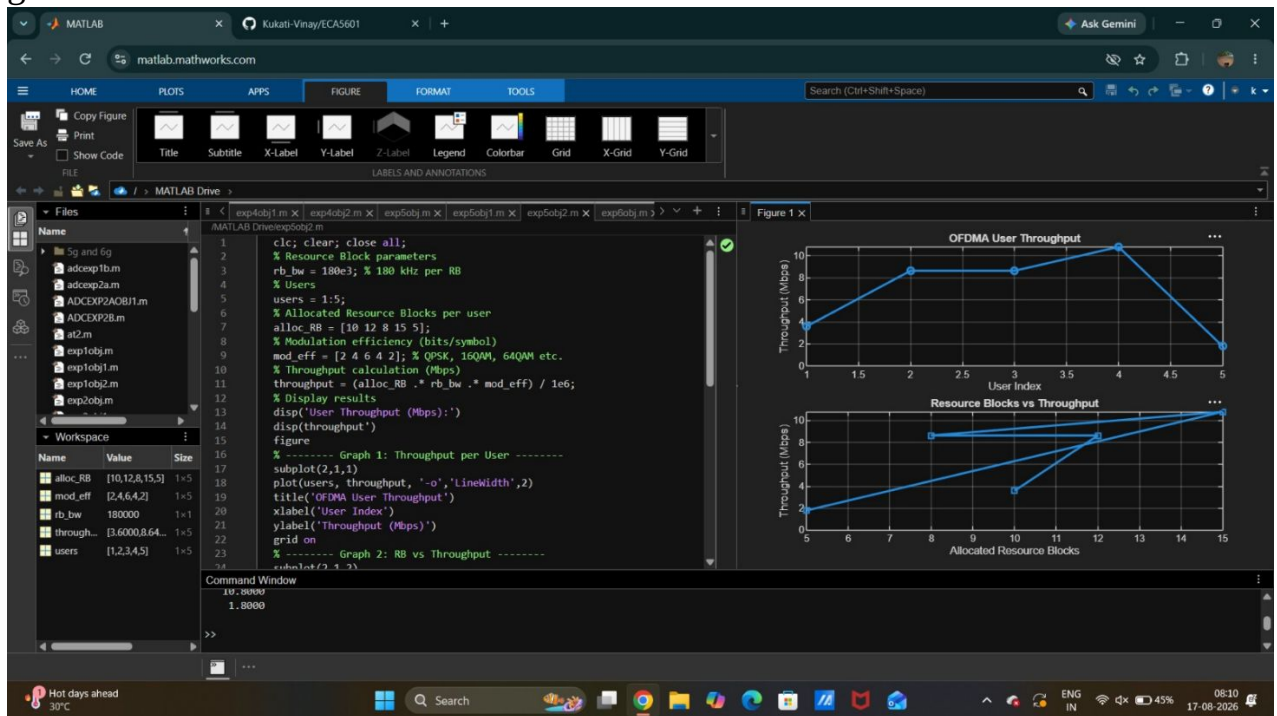

Result:

1. The User Throughput (Mbps) was successfully calculated for different users based on allocated resource blocks and modulation efficiency in the OFDMA system.
2. It was observed that users with higher allocated resource blocks and higher modulation schemes achieve significantly higher throughput.
3. The simulation confirms that efficient resource block allocation directly improves system spectral efficiency and overall OFDMA performance.