

# Audio Filter

EE23BTECH11035 - Kunal Thorawade\*

## I. DIGITAL FILTER

I.1 The sound file used for this code is obtained from the below link

[https://github.com/KunalThorawade/Audio\\_Filter/blob/main/codes/kunal.wav](https://github.com/KunalThorawade/Audio_Filter/blob/main/codes/kunal.wav)

I.2 A Python Code is written to achieve Audio Filtering

```
import soundfile as sf
import numpy as np
from scipy import signal
#read .wav file
input_signal,fs = sf.read('kunal.wav')

#sampling frequency of Input signal
sampl_freq=fs

#order of the filter
order=4

#cutoff frequency
cutoff_freq=1250.0

#digital frequency
Wn=2*cutoff_freq/sampl_freq

# b and a are numerator and denominator
polynomials respectively
b, a = signal.butter(order, Wn, 'low')
print(b)
print(a)

#filter the input signal with butterworth filter
output_signal = signal.lfilter(b, a,
    input_signal)
#output_signal = signal.lfilter(b, a,
    input_signal)

#write the output signal into .wav file
```

```
sf.write('Sound_With_ReducedNoise.wav',
    output_signal, fs)
```

I.3 The audio file is analyzed using spectrogram using the online platform <https://academo.org/demos/spectrum-analyzer>.

The darker areas are those where the frequencies have very low intensities, and the orange and yellow areas represent frequencies that have high intensities in the sound.

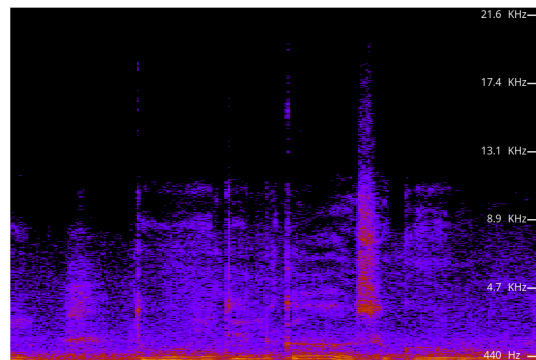


Fig. 1. Spectrogram of the audio file before Filtering

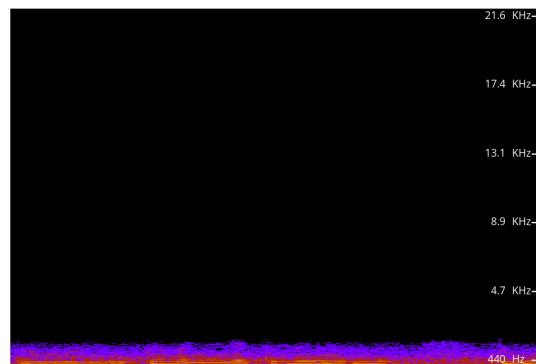


Fig. 2. Spectrogram of the audio file after Filtering

## II. DIFFERENCE EQUATION

II.1 Let

$$x(n) = \left\{ \underset{\uparrow}{1}, 2, 3, 4, 2, 1 \right\} \quad (1)$$

Sketch  $x(n)$ .

II.2 Let

$$y(n) + \frac{1}{2}y(n-1) = x(n) + x(n-2),$$

$$y(n) = 0, n < 0 \quad (2)$$

Sketch  $y(n)$ .

Solve

**Solution:** The C code calculates  $y(n)$  and generates values in a text file.

[https://github.com/KunalThorawade/Audio\\_Filter/blob/main/codes/2\\_2.c](https://github.com/KunalThorawade/Audio_Filter/blob/main/codes/2_2.c)

The following code plots (1) and (2)

[https://github.com/KunalThorawade/Audio\\_Filter/blob/main/codes/2\\_2.py](https://github.com/KunalThorawade/Audio_Filter/blob/main/codes/2_2.py)

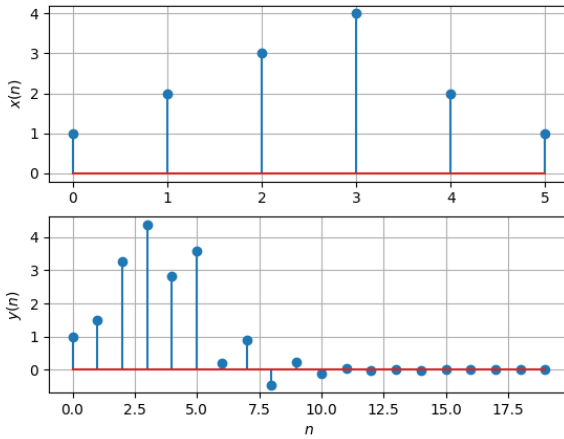


Fig. 3. Plot of  $x(n)$  and  $y(n)$

### III. Z-TRANSFORM

III.1 The Z-transform of  $x(n)$  is defined as

$$X(z) = \mathcal{Z}\{x(n)\} = \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (3)$$

Show that

$$\mathcal{Z}\{x(n-1)\} = z^{-1}X(z) \quad (4)$$

and find

$$\mathcal{Z}\{x(n-k)\} \quad (5)$$

**Solution:** From (3),

$$\mathcal{Z}\{x(n-k)\} = \sum_{n=-\infty}^{\infty} x(n-1)z^{-n} \quad (6)$$

$$= \sum_{n=-\infty}^{\infty} x(n)z^{-n-1} = z^{-1} \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (7)$$

resulting in (4). Similarly, it can be shown that

$$\mathcal{Z}\{x(n-k)\} = z^{-k}X(z) \quad (8)$$

III.2 Find

$$H(z) = \frac{Y(z)}{X(z)} \quad (9)$$

from (2) assuming that the Z-transform is a linear operation.

**Solution:** Applying (8) in (2),

$$Y(z) + \frac{1}{2}z^{-1}Y(z) = X(z) + z^{-2}X(z) \quad (10)$$

$$\Rightarrow \frac{Y(z)}{X(z)} = \frac{1 + z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (11)$$

III.3 Find the Z transform of

$$\delta(n) = \begin{cases} 1 & n = 0 \\ 0 & \text{otherwise} \end{cases} \quad (12)$$

and show that the Z-transform of

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (13)$$

is

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (14)$$

**Solution:** It is easy to show that

$$\delta(n) \xleftrightarrow{\mathcal{Z}} 1 \quad (15)$$

and from (13),

$$U(z) = \sum_{n=0}^{\infty} z^{-n} \quad (16)$$

$$= \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (17)$$

using the formula for the sum of an infinite geometric progression.

III.4 Show that

$$a^n u(n) \xleftrightarrow{\mathcal{Z}} \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (18)$$

**Solution:**

$$a^n u(n) \xleftrightarrow{Z} \sum_{n=0}^{\infty} (az^{-1})^n \quad (19)$$


$$= \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (20)$$

III.5 Let

$$H(e^{j\omega}) = H(z = e^{j\omega}). \quad (21)$$

Plot  $|H(e^{j\omega})|$ . Comment.  $H(e^{j\omega})$  is known as the *Discrete Time Fourier Transform* (DTFT) of  $x(n)$ .

**Solution:** The following code plots the magnitude of transfer function.



Substituting  $z = e^{j\omega}$  in (11), we get

$$|H(e^{j\omega})| = \left| \frac{1 + e^{-2j\omega}}{1 + \frac{1}{2}e^{-j\omega}} \right| \quad (22)$$

$$= \sqrt{\frac{(1 + \cos 2\omega)^2 + (\sin 2\omega)^2}{\left(1 + \frac{1}{2}\cos \omega\right)^2 + \left(\frac{1}{2}\sin \omega\right)^2}} \quad (23)$$

$$= \frac{4|\cos \omega|}{\sqrt{5 + 4\cos \omega}} \quad (24)$$

$$|H(e^{j(\omega+2\pi)})| = \frac{4|\cos(\omega + 2\pi)|}{\sqrt{5 + 4\cos(\omega + 2\pi)}} \quad (25)$$

$$= \frac{4|\cos \omega|}{\sqrt{5 + 4\cos \omega}} \quad (26)$$

$$= |H(e^{j\omega})| \quad (27)$$

Therefore its fundamental period is  $2\pi$ , which verifies that DTFT of a signal is always periodic.

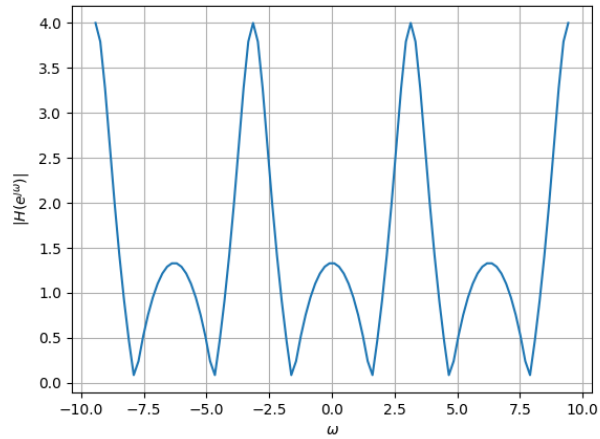


Fig. 4.  $|H(e^{j\omega})|$

#### IV. IMPULSE RESPONSE

IV.1 Find an expression for  $h(n)$  using  $H(z)$ , given that

$$h(n) \xleftrightarrow{Z} H(z) \quad (28)$$

and there is a one to one relationship between  $h(n)$  and  $H(z)$ .  $h(n)$  is known as the *impulse response* of the system defined by (2).

**Solution:** From (11),

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (29)$$


$$\Rightarrow h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (30)$$

using (18) and (8).

IV.2 Sketch  $h(n)$ . Is it bounded? Convergent?

**Solution:** The following code plots  $h(n)$





This is the definition of  $h(n)$ .

**Solution:**

Definition of  $h(n)$ : The output of the system when  $\delta(n)$  is given as input.

The following code plots Fig. 6. Note that this is the same as Fig. 5.

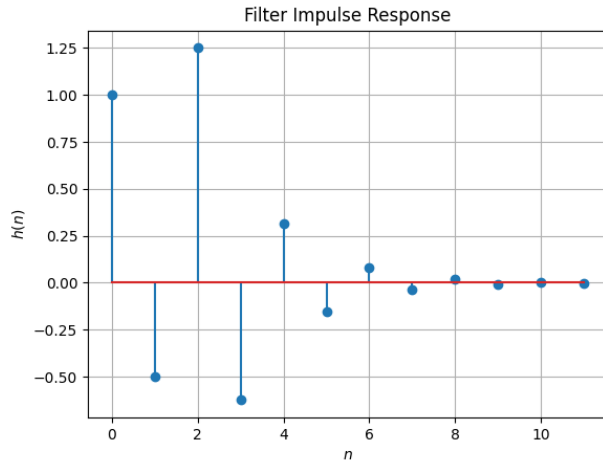



Fig. 5.  $h(n)$  as the inverse of  $H(z)$

IV.3 The system with  $h(n)$  is defined to be stable if

$$\sum_{n=-\infty}^{\infty} h(n) < \infty \quad (31)$$

Is the system defined by (2) stable for the impulse response in (28)?

**Solution:** For stable system (31) should converge.

By using ratio test

$$\lim_{n \rightarrow \infty} \left| \frac{h(n+1)}{h(n)} \right| < 1 \quad (32)$$

$$(33)$$

For large  $n$

$$u(n) = u(n-2) = 1 \quad (34)$$

$$\lim_{n \rightarrow \infty} \left( \frac{h(n+1)}{h(n)} \right) = 1/2 < 1 \quad (35)$$

Therefore it converges. Hence it is stable.

IV.4 Compute and sketch  $h(n)$  using

$$h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2), \quad (36)$$

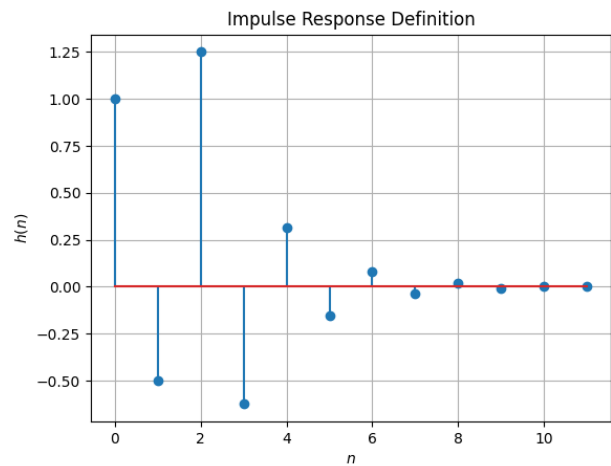



Fig. 6.  $h(n)$  from the definition is same as Fig. 5

IV.5 Compute

$$y(n) = x(n) * h(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (37)$$

Comment. The operation in (37) is known as *convolution*.

**Solution:** The following code plots Fig. 7. Note that this is the same as  $y(n)$  in Fig. 3.



get

$$y(n) = \sum_{k=-\infty}^{\infty} x(k) h(n-k) \quad (39)$$

$$= \sum_{n-k=-\infty}^{\infty} x(n-k) h(k) \quad (40)$$

$$= \sum_{k=-\infty}^{\infty} x(n-k) h(k) \quad (41)$$

## V. DFT AND FFT

V.1 Compute

$$X(k) \triangleq \sum_{n=0}^{N-1} x(n) e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1 \quad (42)$$

and  $H(k)$  using  $h(n)$ .

V.2 Compute

$$Y(k) = X(k)H(k) \quad (43)$$

V.3 Compute

$$y(n) = \frac{1}{N} \sum_{k=0}^{N-1} Y(k) \cdot e^{j2\pi kn/N}, \quad n = 0, 1, \dots, N-1 \quad (44)$$

**Solution:** The above three questions are solved using the code below.

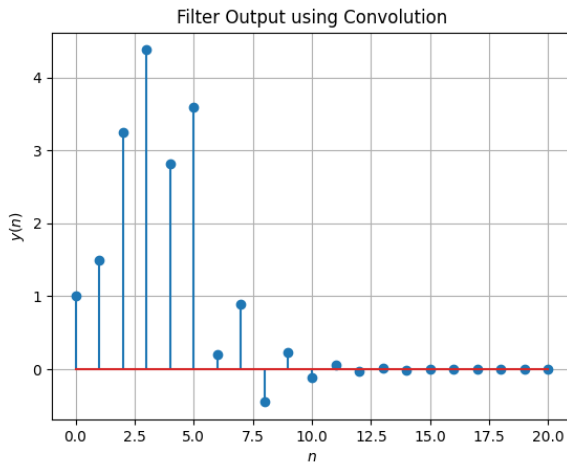




Fig. 7.  $y(n)$  from the definition of convolution

IV.6 Show that

$$y(n) = \sum_{n=-\infty}^{\infty} x(n-k)h(k) \quad (38)$$

**Solution:** In (37), we substitute  $k = n - k$  to

V.4 Repeat the previous exercise by computing  $X(k)$ ,  $H(k)$  and  $y(n)$  through FFT and IFFT.  
**Solution:** The solution of this question can be found in the code below.



This code verifies the result by plotting the obtained result with the result obtained by IDFT.

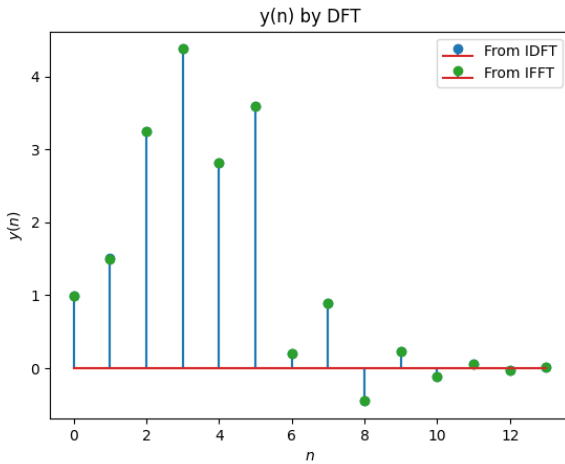


Fig. 8.  $y(n)$  obtained from IDFT and IFFT is plotted and verified

V.5 Wherever possible, express all the above equations as matrix equations.

**Solution:** The DFT matrix is defined as :

$$\mathbf{W} = \begin{pmatrix} \omega^0 & \omega^0 & \dots & \omega^0 \\ \omega^0 & \omega^1 & \dots & \omega^{N-1} \\ \vdots & \vdots & \ddots & \vdots \\ \omega^0 & \omega^{N-1} & \dots & \omega^{(N-1)(N-1)} \end{pmatrix} \quad (45)$$

where  $\omega = e^{-\frac{j2\pi}{N}}$ . Now any DFT equation can be written as

$$\mathbf{X} = \mathbf{W}\mathbf{x} \quad (46)$$

where

$$\mathbf{x} = \begin{pmatrix} x(0) \\ x(1) \\ \vdots \\ x(n-1) \end{pmatrix} \quad (47)$$

$$\mathbf{X} = \begin{pmatrix} X(0) \\ X(1) \\ \vdots \\ X(n-1) \end{pmatrix} \quad (48)$$

Thus we can rewrite (43) as:

$$\mathbf{Y} = \mathbf{X} \odot \mathbf{H} = (\mathbf{W}\mathbf{x}) \odot (\mathbf{W}\mathbf{h}) \quad (49)$$

where the  $\odot$  represents the Hadamard product which performs element-wise multiplication.


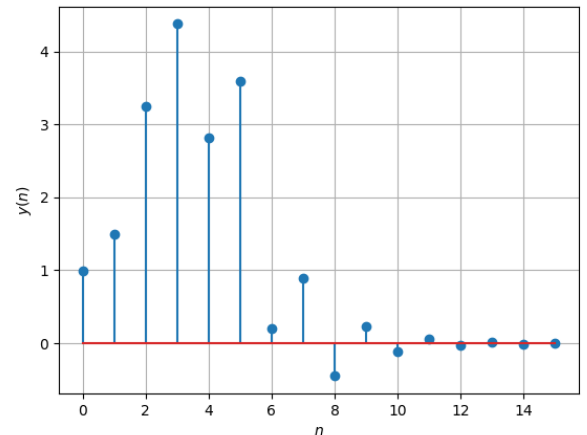


Fig. 9.  $y(n)$  obtained from DFT Matrix

## VI. EXERCISES

Answer the following questions by looking at the python code in Problem I.2.

### VI.1 The command



in Problem I.2 is executed through the following difference equation

$$\sum_{m=0}^M a(m) y(n-m) = \sum_{k=0}^N b(k) x(n-k) \quad (50)$$

where the input signal is  $x(n)$  and the output signal is  $y(n)$  with initial values all 0. Replace **signal.filtfilt** with your own routine and verify.

**Solution:** The below code gives the output of an Audio Filter without using the built in function `signal.lfilter`.

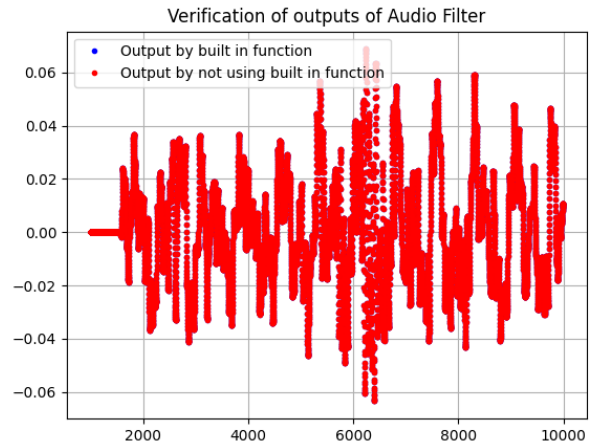



Fig. 10. Both the outputs using and without using function overlap

VI.2 Repeat all the exercises in the previous sections for the above  $a$  and  $b$ .

**Solution:** The code in I.2 generates the values of  $a$  and  $b$  which can be used to generate a difference equation.

And,

$$M = 5 \quad (51)$$

$$N = 5 \quad (52)$$

From 50

$$a(0)y(n) + a(1)y(n-1) + a(2)y(n-2) + a(3)y(n-3) + a(4)y(n-4) = b(0)x(n) + b(1)x(n-1) + b(2)x(n-2) + b(3)x(n-3) + b(4)x(n-4) \quad (53)$$

$$y(n-3) + a(4)y(n-4) = b(0)x(n) + b(1)x(n-1) + b(2)x(n-2) + b(3)x(n-3) + b(4)x(n-4)$$

Difference Equation is given by :

$$\begin{aligned} & y(n) - (3.66)y(n-1) + (5.05)y(n-2) \\ & - (3.099)y(n-3) + (0.715)y(n-4) \\ & = (1.45 \times 10^{-5})x(n) + (5.74 \times 10^{-5})x(n-1) \\ & + (8.62 \times 10^{-5})x(n-2) + (5.74 \times 10^{-5})x(n-3) \\ & + (1.43 \times 10^{-5})x(n-4) \end{aligned} \quad (54)$$

From (50)

$$H(z) = \frac{b_0 + b_1 z^{-1} + b_2 z^{-2} + \dots + b_M z^{-M}}{a_0 + a_1 z^{-1} + a_2 z^{-2} + \dots + a_N z^{-N}} \quad (55)$$

$$H(z) = \frac{\sum_{k=0}^N b(k) z^{-k}}{\sum_{k=0}^M a(k) z^{-k}} \quad (56)$$

Partial fraction on (56) can be generalised as:

$$H(z) = \sum_i \frac{r(i)}{1 - p(i)z^{-1}} + \sum_j k(j)z^{-j} \quad (57)$$

Now,


$$a^n u(n) \xleftrightarrow{z} \frac{1}{1 - az^{-1}} \quad (58)$$

$$\delta(n - k) \xleftrightarrow{z} z^{-k} \quad (59)$$

Taking inverse z transform of (57) by using (58) and (59)

$$h(n) = \sum_i r(i)[p(i)]^n u(n) + \sum_j k(j)\delta(n - j) \quad (60)$$

The below code computes the values of  $r(i)$ ,  $p(i)$ ,  $k(i)$  and plots  $h(n)$



### Stability of $h(n)$ :

According to (31)

$$H(z) = \sum_{n=0}^{\infty} h(n) z^{-n} \quad (61)$$

$$H(1) = \sum_{n=0}^{\infty} h(n) = \frac{\sum_{k=0}^N b(k)}{\sum_{k=0}^M a(k)} < \infty \quad (62)$$

As both  $a(k)$  and  $b(k)$  are finite length sequences they converge.

The below code plots Filter frequency response

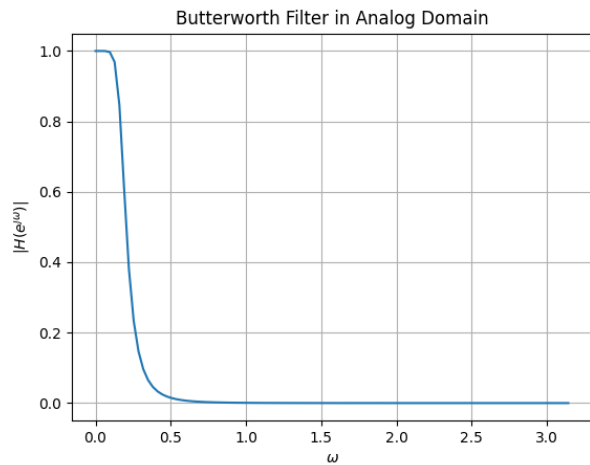



Fig. 11. Frequency Response of Audio Filter

The below code plots the Butterworth Filter in analog domain by using bilinear transform.

$$z = \frac{1 + sT/2}{1 - sT/2} \quad (63)$$





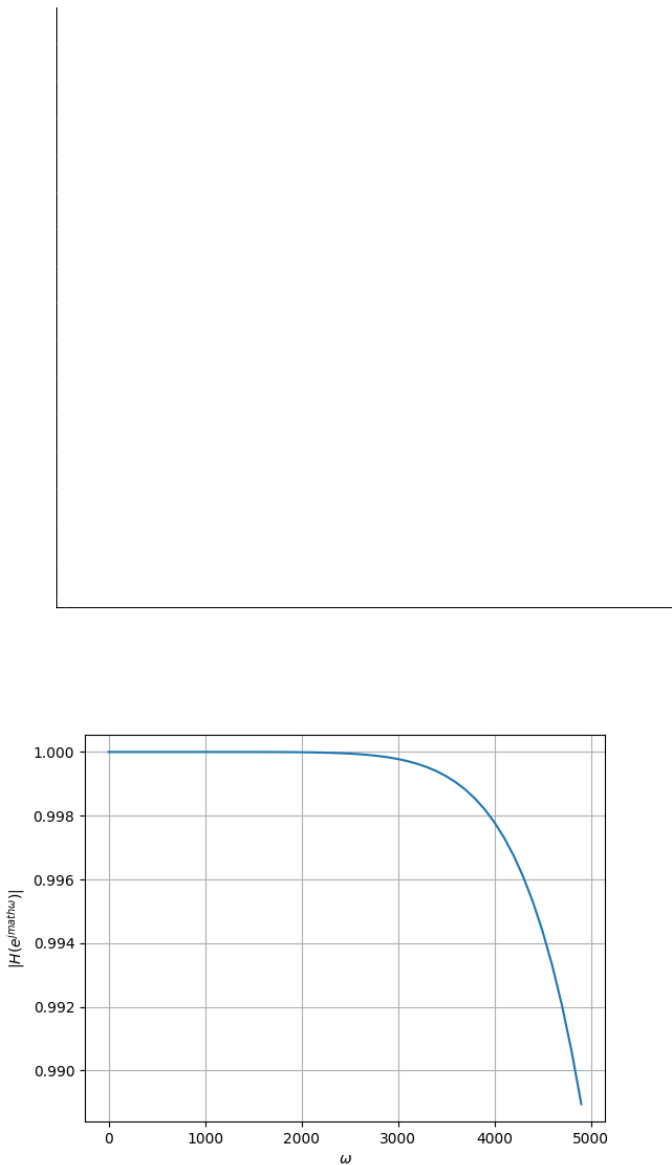


Fig. 12. Butterworth Filter Frequency response in analog domain

The below code plots the Pole-Zero Plot of the frequency response.




Fig. 13. There are complex poles. So  $h(n)$  should be damped sinusoid.

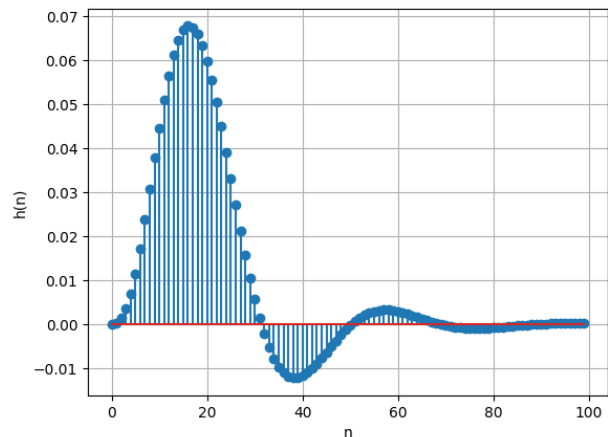


Fig. 14.  $h(n)$  of Audio Filter. It is a damped sinusoid.

VI.3 What is the sampling frequency of the input signal?

**Solution:** The Sampling Frequency is 44.1KHz

VI.4 What is type, order and cutoff-frequency of the above butterworth filter

**Solution:** The given butterworth filter is lowpass with order=4 and cutoff-frequency=1250Hz.

VI.5 Modify the code with different input parameters and get the best possible output.

**Solution:** A better filtering was found on setting the order of the filter to be 5 and also depending on the waveform we can also change cutoff frequency.