WAVLINK
see the world

QUICK START GUIDE

USB-C 8K@30Hz/4K@144Hz
Triple Display Docking Station


www.wavlink.com/en_us/product/WL-UMD05MR-Pro

Enter the Link to View the
Full User Guide and Driver

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

EN **WL-UMD05MR Pro**


OVERVIEW

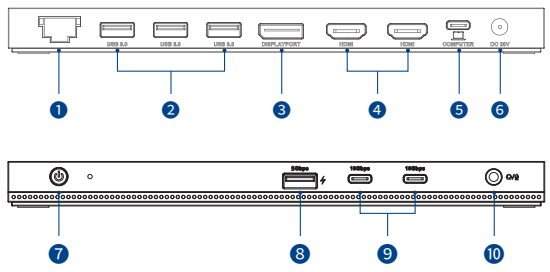


1. 2.5G Ethernet port
2. 5Gbps USB-A port
3. DisplayPort
4. HDMI port
5. Upstream USB-C port
6. DC IN (20V/6.5A)
7. Power button
8. 5Gbps USB-A with BC1.2 charging
9. 10Gbps USB-C
10. 3.5mm 4-pole jack

HOW TO USE

Step 1. Before connecting to the Dock, please ensure the USB-C port of the PC/Laptop supports PD and DP ALT MODE. Failure to meet this requirement will result in non-functional charging and video ports.
Step 2. Connect the DC IN port to a compatible power source. Press the power button; the LED indicator will illuminate blue.
Step 3. Connect the upstream USB-C port to your host PC/laptop.
Step 4. Connect your monitor(s) to the video ports. You may then configure the display modes as needed.

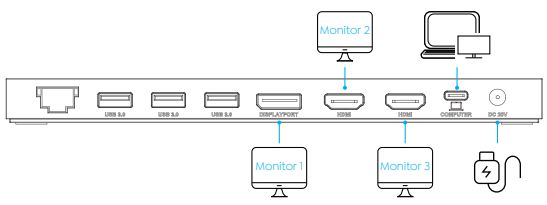

Note:
- The above resolutions are factory test results; The resolution may be different depending on the actual situation of the computer and monitor.
- If you want to use the 3 displays with your PC/laptop simultaneously, please make sure that the Graphics card supports at least 4 displays, including your PCs own screen. Check with your PC manufacturer on this.
- Mac OS supports single-stream transport, so only one video source can be output, such as ABBB (A is the primary display).



Scan the QR code or visit the link on the manual's first page for detailed Display Settings steps.

DISPLAY RESOLUTION

Single Display

		DP	HDMI1	HDMI2
Windows	DP 1.2	3840x2160@30Hz		
	DP 1.4	3840x2160@60Hz		
	DP 1.4 & DSC	7680x4230@30Hz or 3840x2160@144Hz	3840x2160@60Hz	
Mac	DP 1.2	3840x2160@30Hz		
	DP 1.4	/		
	DP 1.4 & DSC	3840x2160@144Hz		

Dual Display

		DP+HDMI 1/HDMI 2	HDMI 1+HDMI 2
Windows	DP 1.2	2 x 1920x1080@60Hz	
	DP 1.4	3840x2160@30Hz + 1920x1080@60Hz	
	DP 1.4 & DSC	3840x2160@75Hz + 3840x2160@60Hz	2 x 3840x2160@60Hz
Mac	DP 1.2	2 x 3840x2160@30Hz	
	DP 1.4	/	
	DP 1.4 & DSC	2 x 3840x2160@60Hz	

Triple Display

		DP+HDMI 1+HDMI 2
Windows	DP 1.2	1920x1080@60Hz + 1920x1080@24Hz + 1600x900@60Hz
	DP 1.4	3 x 1920x1080@60Hz
	DP 1.4 & DSC	1x3840x2160@60Hz + 2x3840x2160@30Hz
Mac	DP 1.2	3 x 3840x2160@30Hz
	DP 1.4	/
	DP 1.4 & DSC	3 x 3840x2160@60Hz

FAQ

Q1: What should I do if the monitors connected to the docking station do not work?
A1: Please make sure that the USB-C port on your laptop supports video output. Not all USB-C ports have this capability.
Q2: Why do my external monitors show the same content when I connect the WAVLINK device to my MacBook?
A2: This is expected behavior due to a limitation in macOS. macOS does not fully support MST, so the external monitors may mirror each other instead of extending independently.
Q3: Why isn't my laptop charging when I connect the power adapter to the hub?
A3: Please make sure that the USB-C port on your laptop supports charging. Not all USB-C ports support this function.
Q4: When I connect three monitors to the docking station, one monitor does not turn on. What should I do?
A4: Please make sure that your GPU supports 4 displays (including the built-in laptop screen), as not all GPUs can support 4 displays simultaneously. If your GPU supports a maximum of 3 displays, try closing the laptop lid to enable all three external monitors. If you encounter any issues, feel free to contact our support team.

Thank you for purchasing WAVLINK product!

Need help?

We're here for you!

www.wavlink.com

Online support: wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

support@wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

+1 8889730883
Mon-Fri 9:00 am - 6:00 pm (UTC-5)