QUICK START GUIDE

USB-C Triple Display Docking Station

kb.wavlink.xyz/docs/WL-UMD01R-Pro/v100/

Click the Link to View the Full User Guide

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

EN **WL-UMD01R Pro**

HOW TO USE

Step 1. Connect the host laptop to the upstream USB-C port.
Step 2. Connect the external monitors to the DP/HDMI port.
Step 3. Connect the power adapter to the DC In, then plug the power adapter into a power source.



DISPLAY RESOLUTION

1. Single Display

		DP1	DP2	HDMI
Windows MST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	3840 x 2160@144Hz	3840 x 2160@144Hz	3840 x 2160@60Hz
Mac OS SST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	3840 x 2160@144Hz	3840 x 2160@144Hz	3840 x 2160@60Hz


2. Dual Display

		Dual DP	DP+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@60Hz	Dual 1920 x 1080@60Hz
	HBR3 (DP1.4)	Dual 2560 x 1440@60Hz	Dual 2560 x 1440@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@30Hz
Mac OS SST	HBR2 (DP1.2)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz
	HBR3 (DP1.4)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz


3. Triple Display

		DP1+DP2+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@30Hz + One 1280 x 720@60Hz
	HBR3 (DP1.4)	Triple 1920 x 1080@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@30Hz + One 1920 x 1080@60Hz
Mac OS SST	HBR2 (DP1.2)	Triple 3840 x 2160@30Hz
	HBR3 (DP1.4)	Triple 3840 x 2160@30Hz
	HBR3+DSC (DP1.4)	Triple 3840 x 2160@30Hz

OVERVIEW

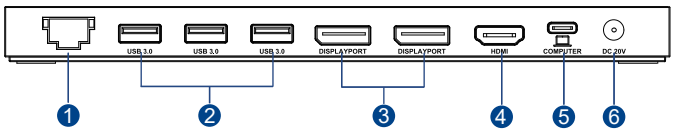

1. Gigabit Ethernet port
2. 3 x USB 3.0 port
3. 2 x DisplayPort
4. 1x HDMI port
5. Upstream USB-C port
6. Power port

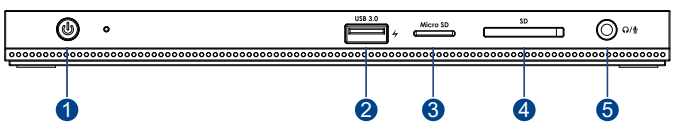


1. Power button
2. USB 3.0 port with BC 1.2 fast charging
3. Micro SD card reader
4. SD card reader
5. 4-pole phone jack

* The above resolutions are factory test results; The resolution may be different depending on the actual situation of the computer and monitor.

Note:
If you want to use the 3 displays with your PC/laptop simultaneously, please make sure that the Graphics card supports at least 4 displays, including your PC's own screen. Check with your PC manufacturer on this.

Remarks for Mac based PC/laptops:
- Mac OS supports Single-Stream Transport mode, so only one video source can be output such as ABB or ABBB (A is the primary display).

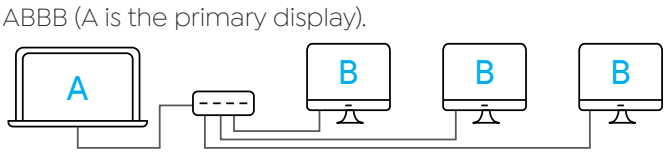

Scan the QR code or visit the link on the manual's first page for detailed Display Settings steps.

FAQ

Q1. What should I do if the monitors connected to the docking station do not work?
A1-1. Please make sure that the USB-C port on your laptop supports video output. Not all USB-C ports have this capability.
A1-2. Please use the USB-C cable included with your WAVLINK device.

Q2. Why do my external monitors show the same content when I connect the WAVLINK device to my MacBook?
A2. This is expected behavior due to a limitation in macOS. macOS does not fully support MST, so the external monitors may mirror each other instead of extending independently.

Q3. Why isn't my laptop charging when I connect the power adapter to the hub?
A3. Please make sure that the USB-C port on your laptop supports charging. Not all USB-C ports support this function.

Q4. When I connect three monitors to the docking station, one monitor does not turn on. What should I do?
A4. Please make sure that your GPU supports 4 displays (including the built-in laptop screen), as not all GPUs can support 4 displays simultaneously. If your GPU supports a maximum of 3 displays, try closing the laptop lid to enable all three external monitors.
If you encounter any issues, feel free to contact our support team.

Thank you for purchasing WAVLINK product!

Need help?

We're here for you!

www.wavlink.com

Online support: wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

support@wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

+1 8889730883
Mon-Fri 9:00 am - 6:00 pm (UTC-5)