WAVLINK
see the world

QUICK START GUIDE


USB-C Triple Display Docking

kb.wavlink.xyz/docs/WL-UMD306/v100/

Connect to the Link to View the Detailed User Guide

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

OVERVIEW

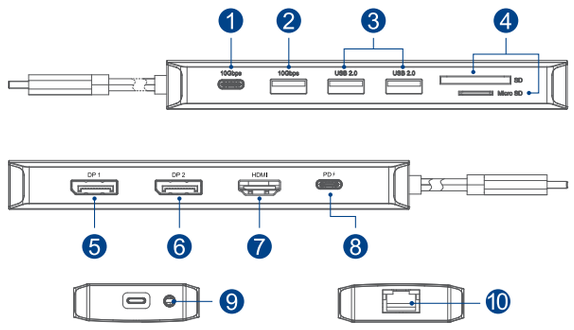

1 USB-C 10Gbps
2 USB-A 10Gbps
3 USB 2.0
4 SD/Micro SD
5 DP 1
6 DP 2
7 HDMI
8 PD IN 100W
9 Audio/Mic
10 RJ45 Ethernet

EN **WL-UMD306**

HOW TO USE

1. Connect the dock to a compatible laptop or smartphone via USB-C/M.
2. Connect the HDMI screen to the dock with an HDMI cable.
3. Connect the DisplayPort screen to the dock with DisplayPort cable.
4. Now you can see the user interface in the screens.
5. Insert the USB-disk into USB 3.0 or USB 2.0 ports to transfer data.
6. Insert the SD or Micro SD cards into slots relatively to read and write data.
7. Connect the USB-C Power adapter to USB-C Power Delivery Port to charge your device.

SINGLE DISPLAY

		DP1	DP2	HDMI
Windows MST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@60Hz	3840 x 2160@60Hz	3840 x 2160@60Hz
	HBR3+ DSC (DP1.4)	7680 x 4320@30Hz	7680 x 4320@30Hz	3840 x 2160@60Hz
Mac OS SST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@60Hz	3840 x 2160@60Hz	3840 x 2160@60Hz
	HBR3+ DSC (DP1.4)	3840 x 2160@144Hz	3840 x 2160@144Hz	3840 x 2160@60Hz

DUAL DISPLAY

		Dual DP	DP+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@60Hz	Dual 1920 x 1080@60Hz
	HBR3 (DP1.4)	Dual 2560 x 1440@60Hz	Dual 2560 x 1440@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@30Hz
Mac OS SST	HBR2 (DP1.2)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz
	HBR3 (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@60Hz

TRIPLE DISPLAY

		DP1+DP2+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@30Hz + One 1280 x 720@60Hz
	HBR3 (DP1.4)	Triple 1920 x 1080@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@30Hz + One 1920 x 1080@60Hz
Mac OS SST	HBR2 (DP1.2)	Triple 3840 x 2160@30Hz
	HBR3 (DP1.4)	Triple 3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	Triple 3840 x 2160@60Hz

* The above resolutions are factory test results; The resolution may be different depending on the actual situation of the computer and monitor.

Note:


If you want to use the 3 displays with your PC/laptop simultaneously, please make sure that the Graphics card of the USB-C port supports at least 4 displays of DP ALT Mode, including your PC's own screen. Check with your PC manufacturer on this. If your Graphics card doesn't support 4 displays, please check Q&A: Q2 for details.

Remarks for Windows based PC/laptops:

Before you connect three monitors, we suggest you disconnect PC/laptop first, please check Q&A: Q2 for details.

Remarks for Mac based PC/laptops:

- Mac OS is Single-Stream Transport mode, so only one video source can be output such as ABB or ABBB(A is the primary display).



Scan the QR code or visit the link on the manual's first page for detailed Display Settings steps.

FAQ

Q1. How to figure out the maximum resolution(DP1.2/ DP1.4) my laptop supports via type-c port?

A1. Please contact laptop manufacturer to confirm that.

Q2. Why doesn't my third monitor display when I set the triple display mode?

A2. **Step 1:** Choose the main display
1. Right-click to select "**Display settings**".
2. Choose a monitor display and scroll down to "**Multiple displays**".
3. Mark "**Make this my main display**".

Step 2: Disconnect laptop display
1. Select the laptop display ("1" is the default display for laptop) and scroll down to "**Multiple displays**".
2. Select "**Disconnect this display**", then laptop display panel will become disconnected.

Step 3: Turn on the third monitor display
1. Choose the remaining monitor display then scroll down to "**Multiple displays**"
2. Select "**Extend desktop to this display**" to enable this display.

Q3. Why does it show "slow charging" on my laptop?

A3. Some users may notice that the charging status shows "**slow charging**", this is because some series of laptop have protection protocol, especially laptops that have both Thunderbolt 3 port and over 100W external DC power adapter. Please solve it by using an external power adapter to charge the laptop.

Q4. Why does this Docking power off and reconnect after the PD power supply is unplugged?

A4. When this Docking switches the power supply from the original PD to the computer power supply, there will be a long delay on the computer that does not support fast switching, resulting in power outage and reconnection on this Docking due to insufficient power supply.

Q5. My Laptop/PC supports PD and DP ALT MODE, why is it still not working properly?

A5. Please try to update the PC/Laptop's BIOS, Graphics Card and other Drivers to the latest version, or contact our Customer Service.

Please refer to the Detailed User Guide for the operation guide diagrams.

Thank you for purchasing WAVLINK product!

Need help?

We're here for you!

www.wavlink.com

Online support: wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

support@wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

+1 8889730883
Mon-Fri 9:00 am - 10:00 pm (UTC-5)

WAVLINK
see the world

GUÍA DE INICIO RÁPIDO


Docking USB-C de triple pantalla

kb.wavlink.xyz/docs/WL-UMD306/v100/

Conéctese al enlace para ver la GUÍA DE INICIO RÁPIDO

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

VISIÓN GENERAL

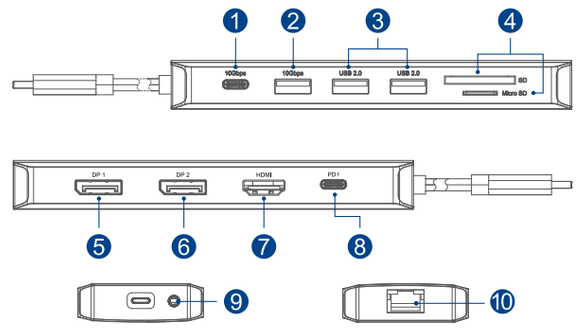

1 USB-C 10Gbps
2 USB-A 10Gbps
3 USB 2.0
4 SD/Micro SD
5 DP 1
6 DP 2
7 HDMI
8 PD IN 100W
9 Audio/Micrófono
10 RJ45 Ethernet

ES **WL-UMD306**

CÓMO USAR

1. Connectez la station d'accueil à un ordinateur portable ou à un smartphone compatible via USB-C mâle.
2. Conecte la pantalla HDMI a la base con un cable HDMI.
3. Conecta la pantalla DisplayPort a la base con un cable DisplayPort.
4. Ahora puedes ver la interfaz de usuario en las pantallas.
5. Inserta el disco USB en los puertos USB 3.0 o USB. 2.0 para transferir datos.
6. Inserte las tarjetas SD o Micro SD en las ranuras relativamente para leer y escribir datos.
7. Conecte el adaptador de alimentación USB-C al puerto de entrega de alimentación USB-C para cargar su dispositivo.

PANTALLA ÚNICA

		DP1	DP2	HDMI
Windows MST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@60Hz	3840 x 2160@60Hz	3840 x 2160@60Hz
	HBR3+ DSC (DP1.4)	7680 x 4320@30Hz	7680 x 4320@30Hz	3840 x 2160@60Hz
Mac OS SST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@60Hz	3840 x 2160@60Hz	3840 x 2160@60Hz
	HBR3+ DSC (DP1.4)	3840 x 2160@144Hz	3840 x 2160@144Hz	3840 x 2160@60Hz

DOBLE PANTALLA

		Dual DP	DP+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@60Hz	Dual 1920 x 1080@60Hz
	HBR3 (DP1.4)	Dual 2560 x 1440@60Hz	Dual 2560 x 1440@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@30Hz
Mac OS SST	HBR2 (DP1.2)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz
	HBR3 (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@60Hz

PANTALLA TRIPLE

		DP1+DP2+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@30Hz + One 1280 x 720@60Hz
	HBR3 (DP1.4)	Triple 1920 x 1080@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@30Hz + One 1920 x 1080@60Hz
Mac OS SST	HBR2 (DP1.2)	Triple 3840 x 2160@30Hz
	HBR3 (DP1.4)	Triple 3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	Triple 3840 x 2160@60Hz

* Las resoluciones anteriores son resultados de pruebas de fábrica; La resolución puede ser diferente dependiendo de la situación real del ordenador y el monitor.

Nota:


Si desea utilizar las 3 pantallas con su PC/portátil simultáneamente, asegúrese de que la tarjeta gráfica del puerto USB-C admite al menos 4 pantallas del modo DP ALT, incluida la propia pantalla de su PC. Compruébalo con el fabricante de tu PC. Si tu tarjeta gráfica no admite 4 pantallas, consulta la Q&A: Q2 para más detalles.

Observaciones para PC/portátiles con Windows:

Antes de conectar tres monitores, le sugerimos que desconecte primero el PC/portátil, consulte la Q&A: Q2 para más detalles.

Observaciones para PC/portátiles basados en Mac:

- Mac OS está en modo Single-Stream Transport, por lo que sólo se puede emitir una fuente de vídeo como ABB o ABBB(A es la pantalla principal).



Escanee el código QR o visite el enlace en la primera página del manual para ver los pasos detallados de la Configuración de pantalla.

FAQ

Q1. ¿Cómo averiguar la resolución máxima (DP1.2/DP1.4) admitida por mi portátil mediante un puerto Type-C?

A1. Póngase en contacto con el fabricante del portátil para confirmarlo.

Q2. ¿Por qué no se muestra mi tercer monitor cuando configuro el modo de triple pantalla?

A2. **Paso 1:** Elija la pantalla principal
1. Haga clic con el botón derecho para seleccionar "**Configuración de pantalla**".
2. Elige un monitor y desplázate hacia abajo hasta "**Múltiples pantallas**".
3. Marca "**Hacer de ésta mi pantalla principal**".

Paso 2: Desconecte la pantalla del portátil
1. Seleccione la pantalla del portátil ("1" es la pantalla por defecto del portátil) y desplácese hasta "**Múltiples pantallas**".
2. Seleccione "**Desconectar esta pantalla**" y la pantalla del portátil se desconectará.

Paso 3: Encienda la pantalla del tercer monitor
1. Seleccione el monitor restante y desplácese hasta "**Múltiples pantallas**"
2. Seleccione "**Extender escritorio a esta pantalla**" para activar esta pantalla.

Q3. ¿Por qué se muestra "carga lenta" en mi portátil?

A3. Algunos usuarios pueden notar que el estado de carga muestra "**carga lenta**", esto se debe a que algunas series de portátiles tienen protocolo de protección, especialmente los portátiles que tienen tanto puerto Thunderbolt 3 y más de 100W adaptador de corriente DC externo Por favor, solucionarlo mediante el uso de un adaptador de corriente externo para cargar el portátil.

Q4. ¿Por qué este Docking se apaga y se vuelve a conectar después de desenchufar la fuente de alimentación PD?

A4. Cuando este Docking cambia la fuente de alimentación desde el adaptador de corriente al puerto Tipo-C del host, se producirá un largo retraso en el ordenador que no soporta la conmutación rápida resultando en el apagado y reconexión en este Docking debido a una fuente de alimentación insuficiente.

Q5. Mi portátil/PC soporta PD y DP ALT MODE, ¿por qué sigue sin funcionar correctamente?

A5. Intente actualizar el BIOS del PC/portátil, la tarjeta gráfica y otros controladores a la última versión, o póngase en contacto con nuestro servicio de atención al cliente.

Consulte la Guía de Usuario Detallada para ver los diagramas de operación.

¡Gracias por comprar productos WAVLINK!

¿Necesitas ayuda?

Nous sommes là pour vous!

www.wavlink.com

Online support: wavlink.com
Disponible de lunes a viernes de 8:30 a 17:30 (UTC+8)

support@wavlink.com
Disponible de lunes a viernes de 8:30 a 17:30 (UTC+8)

+1 8889730883
De lunes a viernes, de 9:00 a 22:00 (UTC-5)