
(a) Common three-dimensional geometry and constraints



Rigid-body pins: $u_Y = u_z = 0$ at (2, 0, 0); $u_z = 0$ at (2, 10, 0) mm.
The same fixed domain and bands are used for every FEM and PD grid.

(b) Prescribed loading history

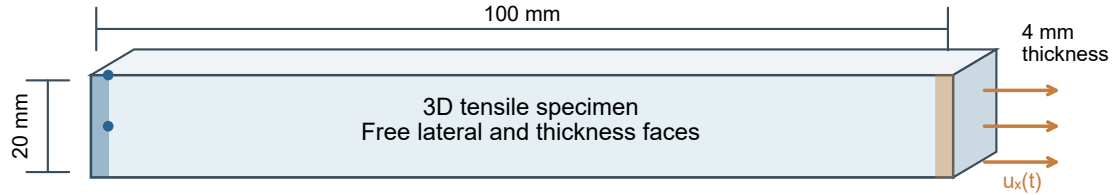