1. Description

1.1. Project

Project Name	stm32_I2C_master_slave_Send_Receive
Board Name	custom
Generated with:	STM32CubeMX 5.6.1
Date	06/13/2020

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

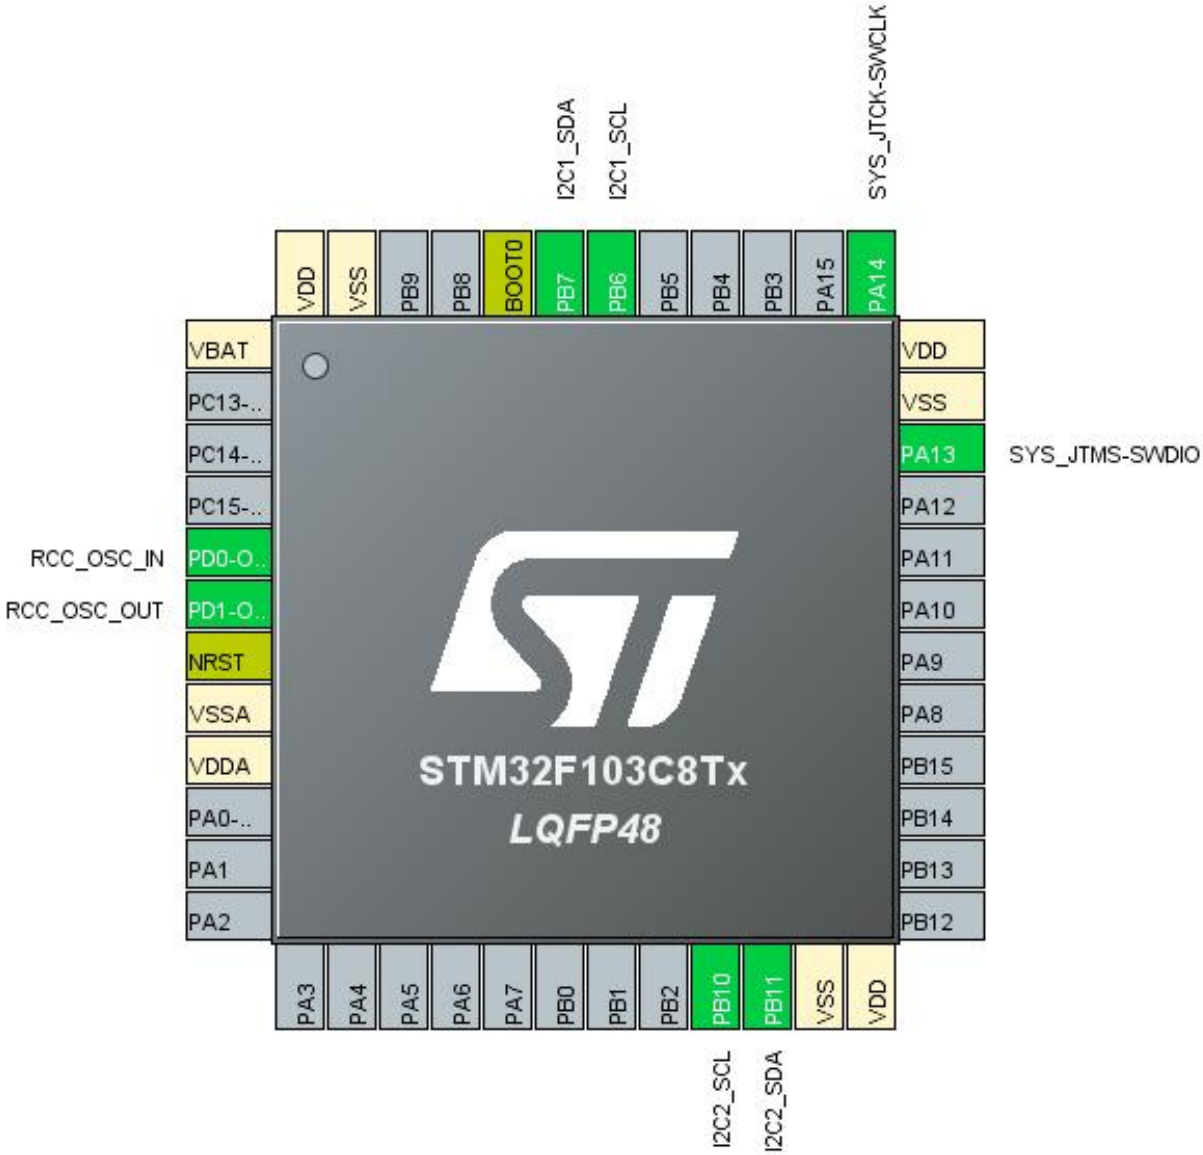

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
21	PB10	I/O	I2C2_SCL	
22	PB11	I/O	I2C2_SDA	
23	VSS	Power		
24	VDD	Power		
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

4. Clock Tree Configuration

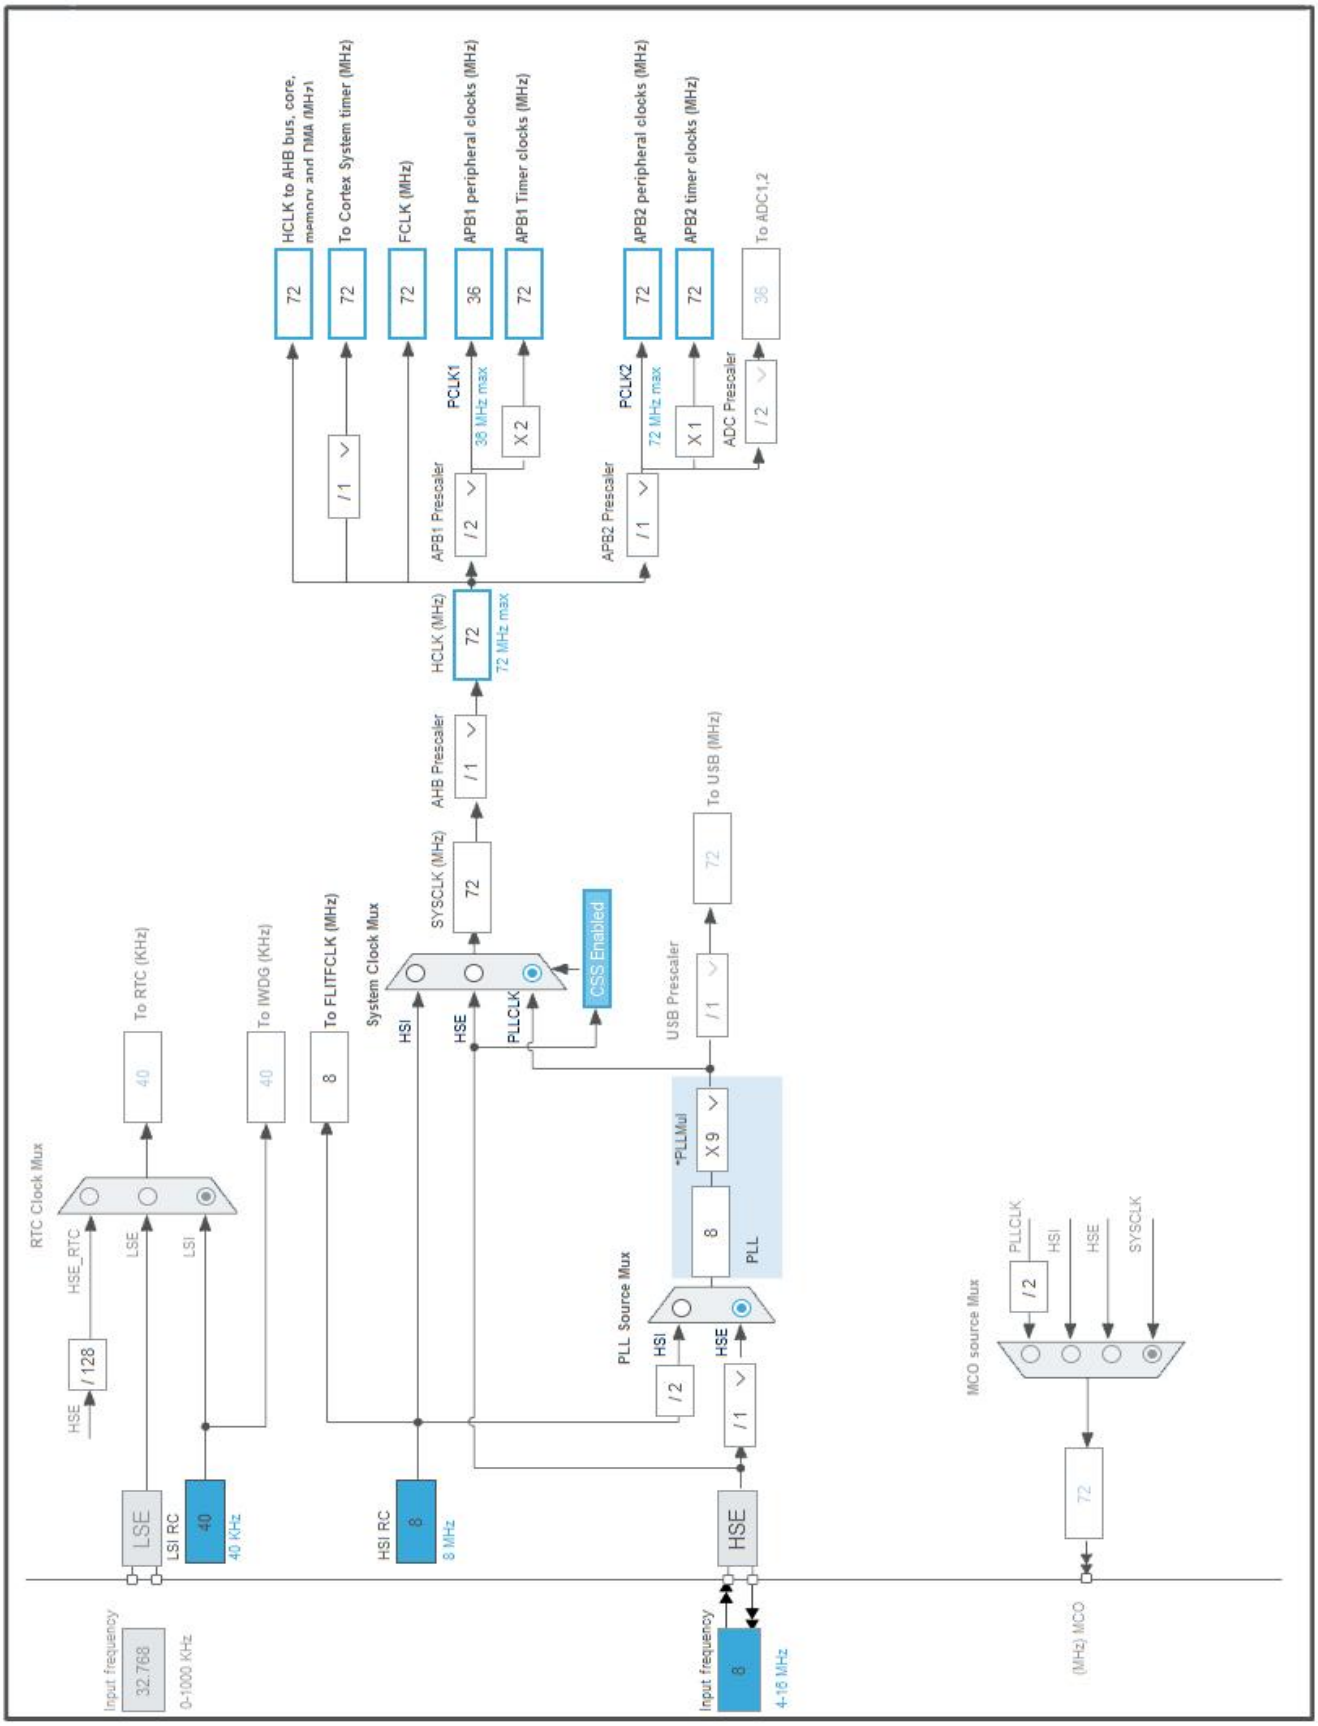

5. Software Project

5.1. Project Settings

Name	Value
Project Name	stm32_I2C_master_slave_Send_Receive
Project Folder	C:\Users\C\Documents\GitHub\stm32_I2C_master_slave_Send_Receive\Code\st
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	27 mA	14 µA
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Ta Max	100.1	105
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	2.71 mA
Battery Life	1 month, 21 days, 17 hours	Average DMIPS	61.0 DMIPS

6.6. Chart

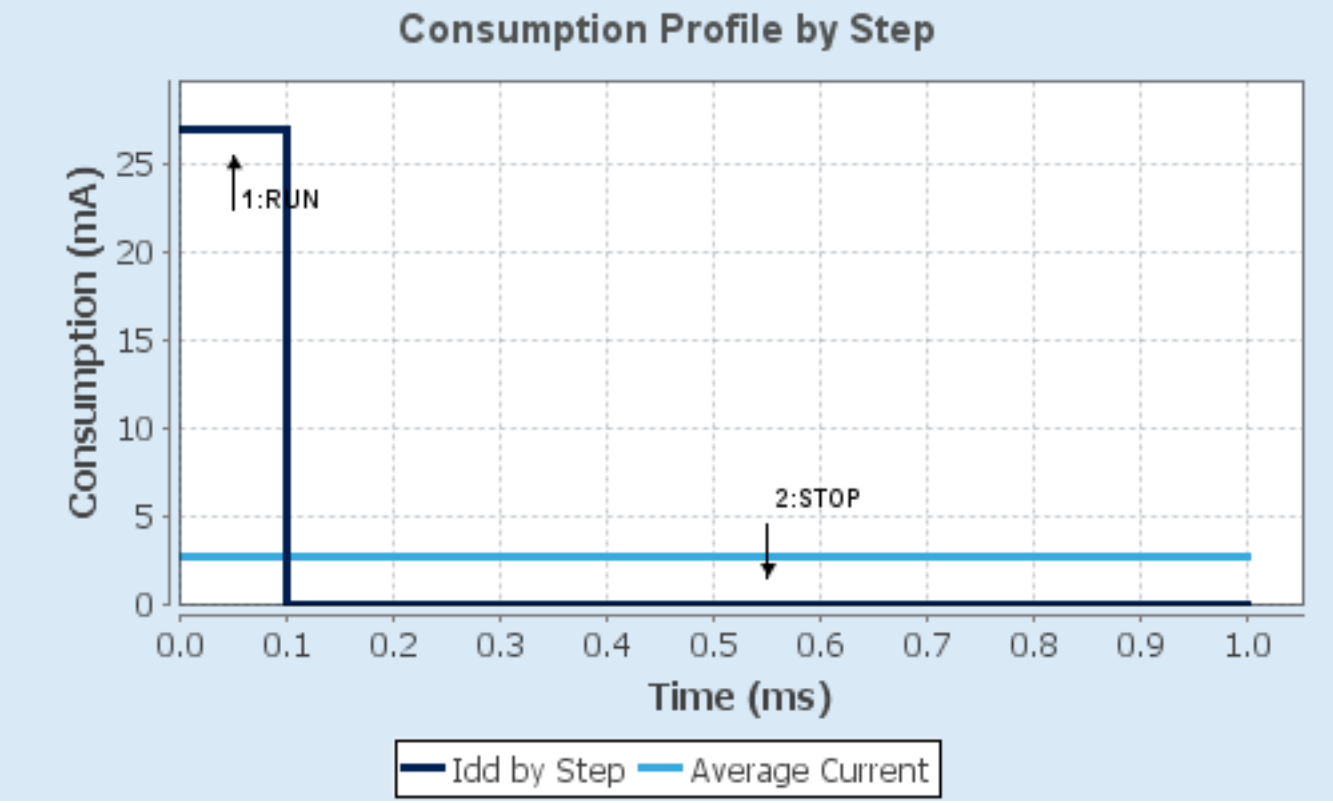
Consumption Profile by Step
Consumption (mA)
25
20
15
10
5
0
1:RUN
2:STOP
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. IPs and Middleware Configuration

7.1. CRC

mode: Activated

7.2. GPIO

7.3. I2C1

I2C: I2C

7.3.1. Parameter Settings:

Master Features:

I2C Speed Mode	**Fast Mode ***
I2C Clock Speed (Hz)	400000
Fast Mode Duty Cycle	Duty cycle Tlow/Thigh = 2

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.4. I2C2

I2C: I2C

7.4.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.5. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.5.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

7.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	**High ***	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	**High ***	
I2C2	PB10	I2C2_SCL	Alternate Function Open Drain	n/a	**High ***	
	PB11	I2C2_SDA	Alternate Function Open Drain	n/a	**High ***	
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	

8.2. DMA configuration

DMA request	Stream	Direction	Priority
I2C1_RX	DMA1_Channel7	Peripheral To Memory	Low
I2C1_TX	DMA1_Channel6	Memory To Peripheral	Low
I2C2_RX	DMA1_Channel5	Peripheral To Memory	Low
I2C2_TX	DMA1_Channel4	Memory To Peripheral	Low

I2C1_RX: DMA1_Channel7 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

I2C1_TX: DMA1_Channel6 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

I2C2_RX: DMA1_Channel5 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

I2C2_TX: DMA1_Channel4 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel4 global interrupt	true	6	0
DMA1 channel5 global interrupt	true	6	0
DMA1 channel6 global interrupt	true	6	0
DMA1 channel7 global interrupt	true	6	0
I2C1 event interrupt	true	5	0
I2C2 event interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 error interrupt	unused		
I2C2 error interrupt	unused		

*** User modified value**

9. Predefined Views - Category view : Current

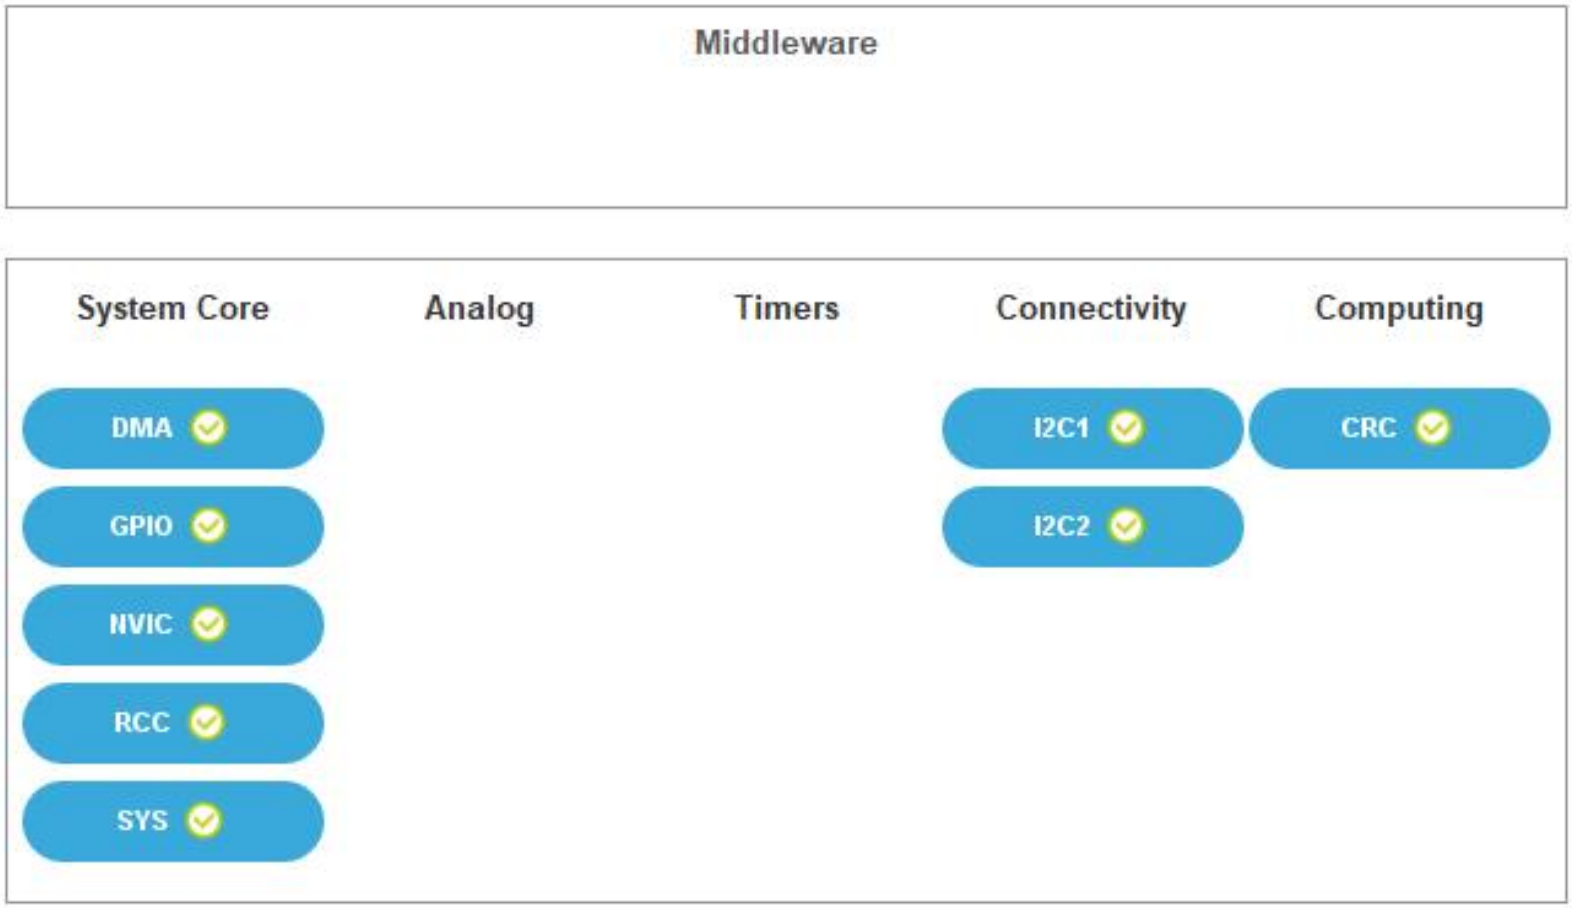

10. Software Pack Report