The Hong Kong Polytechnic University
Department of Building Environment and Energy Engineering

BSE3124 Electricity and Buildings **2026/27 Semester 1**

Assignment – Answer Sheets

Group number: 1

Names of group members: LYU Mingliang (24099296D)

HUANG Celine (24034414D)

LIU Wing Kei (24093229D)

Task 1 – Loading estimation and transformer room location

Estimation of the building electrical load using CLP COP215 and justifications for transformer room and main LV switch room locations:

Basis and assumptions. The assessment covers ten identical office floors, each with usable areas assumed to be 309, 309 and 410 m^2. CLP COP215 Rev 07 forms the load-assessment basis. The 1000 kW in the question is cooling output, not electrical demand. The calculation assumes packaged air-cooled AC, PF 0.90, five lifts and equal allocation to two supply zones.

$$
\begin{aligned}
A &= 10(309 + 309 + 410) = 10\,280\ \mathrm{m}^2, \\
S_{\text{office}} &= 10\,280(0.16) = 1644.8\ \mathrm{kVA}, \\
P_{\text{AC}} &= (1000/3.51685)(1.85) = 526.039\ \mathrm{kW}, \\
S_{\text{AC}} &= 526.039/0.90 = 584.488\ \mathrm{kVA}, \\
S_{\text{public}} &= 5(40) = 200\ \mathrm{kVA}, \\
S_{\text{design}} &= 1.10(1644.8 + 584.488 + 200) = 2672.216\ \mathrm{kVA}.
\end{aligned}
$$

The 40 kVA/lift allowance is an aggregate public-services reference, not a lift motor rating. A public-services overlap allowance of 0–200 kVA gives 2452.216–2672.216 kVA; the upper bound is adopted. The references are COP215 3.1.7, 3.3.1 and Appendices 2/7.

Selection. The proposal uses two 1500 kVA transformers to provide 3000 kVA. Each serves five floors and half the plant/public allowance: 1336.108 kVA per section. Full-load N–1 is not provided; a failed transformer requires load shedding. Unauthorised parallel operation must be prevented.

Room location. The lower-left ground-floor perimeter accommodates the proposed 12430×5450 mm transformer room and adjacent 12430×3500 mm main LV room (LV depth assumed). This allows external delivery/access, short LV interfaces, separation from the central lift/stair/AHU core and independent customer access.

Access provisions include 3 m delivery access within 20 m of unloading. Its planning conditions include COP101 v16 4.3 clearance envelopes, 2-hour partitions, sealed penetrations and a raised floor level. Door sweeps require sequential use. Louvres provide 1.20 m^2 free area at the assumed 50% free ratio. Equipment/ventilation and 10.03/10.31 m LV interfaces are detailed in the continuation and ground-floor drawings.

Task 1 – Loading estimation and transformer room location (continued)

Transformer and main LV room proposal

The design uses two 1500 kVA transformers serving separate LV sections, providing 3000 kVA in total and a margin of 327.784 kVA. Floors 1–5 are allocated to section A and floors 6–10 to section B, with each section also receiving half of the central plant/public allowance. Under this assumed equal split, each section carries 1336.108 kVA, corresponding to about 2030 A at 380 V. Full-load N–1 is not provided. The normal-open four-pole bus coupler provides transfer after source isolation and load shedding. Electrical and mechanical interlocking of ACB-A, ACB-B and BC prohibits all three being closed. Break-before-make operation prevents transformer paralleling and backfeed. The 2250 A incoming setting limits transfer to $\sqrt{3}(380)(2250)/1000 = 1480.903$ kVA; shed at least 1191.313 kVA from the adopted building demand before transfer. This follows CLP GuideToSupply v10 section 3.

Use the lower-left perimeter for the 12430 by 5450 mm substation and adjacent 12430 by 3500 mm LV room (LV depth assumed). This provides external plant access, short LV interfaces and separation from the central core. Adopt a 3 m delivery route within 20 m of unloading, subject to site confirmation.

HV-01 and TX-A/B have diagrammatic internal details within assumed 3000 by 1000 mm and 2200 by 1800 mm installation envelopes. Seven 1140 mm LV bays occupy 7980 mm, retaining 1500 mm front and 990 mm rear aisles. The end-mounted BC has segregated insulated rear links to both sections. COP101 v16 4.3 governs HV clearances (rear 1000, front 1800, sides 750 mm) and transformer clearances (LV terminals 900, elsewhere 750 mm). Drawings show the clearance envelopes, 2-hour partitions, raised FFL and outward-opening doors; shared door sweeps require sequential use.

EF-A/B each use the COP101 v16 6.6 type: 630 mm, 30 degrees, 700 rpm; 4500 m^3/h at 70 Pa. Two 600 by 2000 mm inlet louvres, at 50% free area, provide 1.20 $m^2 > 1.12$ m^2. High-level 900 by 750 mm ducts discharge at least 2.5 m above street. Adopted LV interface lengths, including tails, remain 10.03/10.31 m, below 20 m.

Main distribution schematic

The main schematic shows two transformer incomers, a normally-open interlocked bus coupler, separate floor and plant feeders, tenant controls and meters, and the customer MET. Each floor has a 400 A frame MCCB set to 320 A. Each tenant has a four-pole MCCB immediately before its CLP meter (GuideToSupply section 7.4): preliminary O1/O2 100 A and O3 125 A, based on the COP215 area demands including the 1.1 factor. The detailed F1/O1 uses the Task 3 demand and a 63 A NSX100H instead. O1/O2 use whole-current meters; O3 uses CLP CT-operated metering with 16 A HRC voltage fuses/links (GuideToSupply 9.11 and 9.16). CT ratios and metering equipment are assigned by CLP. Other tenant final circuits are outside the selected-office design scope. The diagram follows the functional relationships in *Electrical Schematic 1*; *Electrical Schematic 2* guides the final DB connections.

Equipment selection and checks

CLP supplies the transformers, HV switchgear and utility metering under COP101 v16, responsibility schedule 7.1–7.8. The equipment outlines and proposed access dimensions are design allowances, subject to supplier and site coordination.

Task 1 – Loading estimation and transformer room location (continued)

For customer equipment, select Schneider MasterPact MTZ2 25H1 four-pole incomers, 2500 A frame with MicroLogic 6.0X LSIG long-time pickup $I_r = 0.9(2500) = 2250$ A. Each calculated section current is $1336.108 \times 1000/(\sqrt{3} \times 380) = 2030.01$ A. Hence $2030.01 < 2250 < 2279.01$ A, the last value being the transformer full-load current at the conservative 380 V design basis. The 4P draw-out coupler is also MTZ2 25H1, 2500AF/2250AT, with MicroLogic 5.0X LSI. Main incomers use integrated phase/neutral sensing for ground-fault protection; the sensor arrangement requires CLP acceptance. The customer retains its own electrode, MET and protective bonding. PE remains continuous and no customer N–PE bridge is added.

The five-floor rising main has $I_b = 5(164.48)(1.1)1000/(\sqrt{3} \times 380) = 1374.46$ A. Select MTZ2 16H1, 1600 A, with $I_r = 1440$ A, feeding Canalis KTC2500 copper busway. Its 2000 A allowance for 15–33% third harmonic, further reduced by 0.97 for 40 °C daily-average ambient, gives 1940 A $>$ 1440 A. At each floor, $I_b = 274.89$ A: select ComPacT NSX400H C40H42D400, 400 A frame/MicroLogic 2.3 with $I_r = 320$ A. The plant/public branch has $I_b = 655.55$ A: select ComPacT NS800H C080H45AFM, 800 A with $I_r = 720$ A. These are main-distribution apparatus selections; Task 3 sizes the selected tenant's incoming and outgoing cables.

For the main bus fault-duty check, assume transformer impedance 6%, allow a 10% negative impedance tolerance and adopt voltage factor 1.1. With one transformer per section, the conservative transformer-only bound is

$$I_k = \frac{1.1(1500 \times 1000)}{\sqrt{3}(380)(0.054)} = 46.43 \text{ kA}.$$

Treat the entire 655.55 A plant/public envelope in each section as rotating load, with initial contribution eight times rated current. Normal operation gives $46.424 + 8(655.55)/1000 = 51.669$ kA. During non-parallel transfer both plant groups may remain connected, so use the larger bound $46.424 + 2(8)(655.55)/1000 = 56.913$ kA. The selected 66 kA ACBs and 70 kA MCCBs exceed this duty. The impedance and motor-contribution assumptions define this fault-duty bound.

Ventilation duty


COP101 v16 clause 6.4 provides a 15 kW heat-dissipation reference per transformer. Adopt a 25% cyclic-load margin: $Q = 2(15)(1.25) = 37.5$ kW. At a combined 9000 m^3/h, with assumed air density 1.2 kg/m^3 and $c_p = 1005$ J/(kg K),

$$\Delta T = \frac{37500}{1.2(1005)(9000/3600)} = 12.44 \text{ K}.$$

At each 0.675 m^2 duct the velocity is 1.85 m/s; combined inlet free-area velocity is 2.08 m/s. For a short 1.4 m design duct route, assumed Darcy factor 0.025, inlet coefficient 2 and combined bend/transition/outlet coefficient 2, estimated pressure loss is 9.41 Pa, below the 70 Pa selected duty. The installed louvre/duct combination must maintain this duty. Fan noise limit is 58 dB(A) at 1 m under clause 6.6.

TASK 1 | GROUND-FLOOR PLANTROOM LOCATION

A3 LANDSCAPE | SCALE 1:200 | DIMENSIONS IN mm | GROUND FLOOR

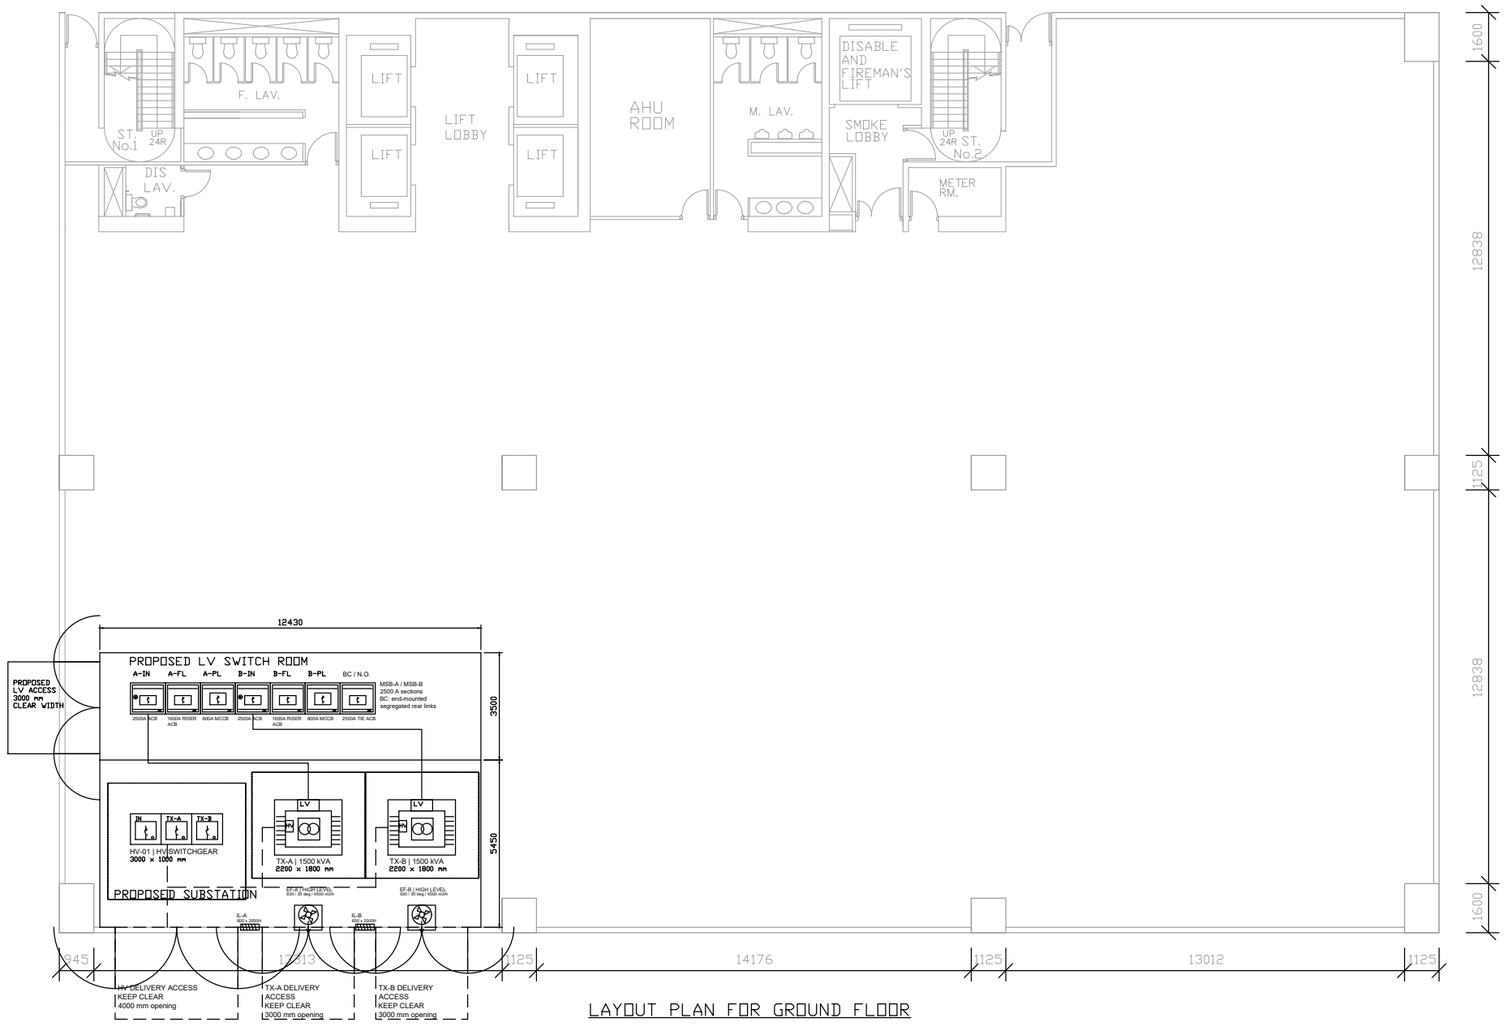

LAYOUT PLAN FOR GROUND FLOOR

PROPOSED LOCATION
Substation: 12430 x 5450 mm.
Adjacent LV room: 12430 x 3500 mm (proposed).
See 1:75 plantroom detail.

LOCATION REASONS
External plant access.
Short transformer-to-incomer interfaces.
Separation from lift/stair/AHU core.
Independent west entrance to LV room.

LOAD ASSESSMENT
Offices: 1644.800 kVA.
AC: 1000 kW cooling -> 526.039 kW electrical -> 584.488 kVA at assumed PF 0.90.
Public services: 200 kVA aggregate allowance.
Two-zone conservative envelope: 2672.216 kVA.
Propose 2 x 1500 kVA, with equal zone allocation; no full-load N-1.


SITE COORDINATION
Confirm external access, >=3 m clear delivery route and unloading within 20 m.
Coordinate openings, structure, flood/fire provisions and supplier equipment dimensions.

GROUP 1 | TASK 1

Design basis: CLP COP215 Rev07; CLP COP101 v16.

TASK 1 | PROPOSED SUBSTATION AND MAIN LV ROOM

A3 LANDSCAPE | SCALE 1:75 | DIMENSIONS IN mm | PLANTROOM DETAIL

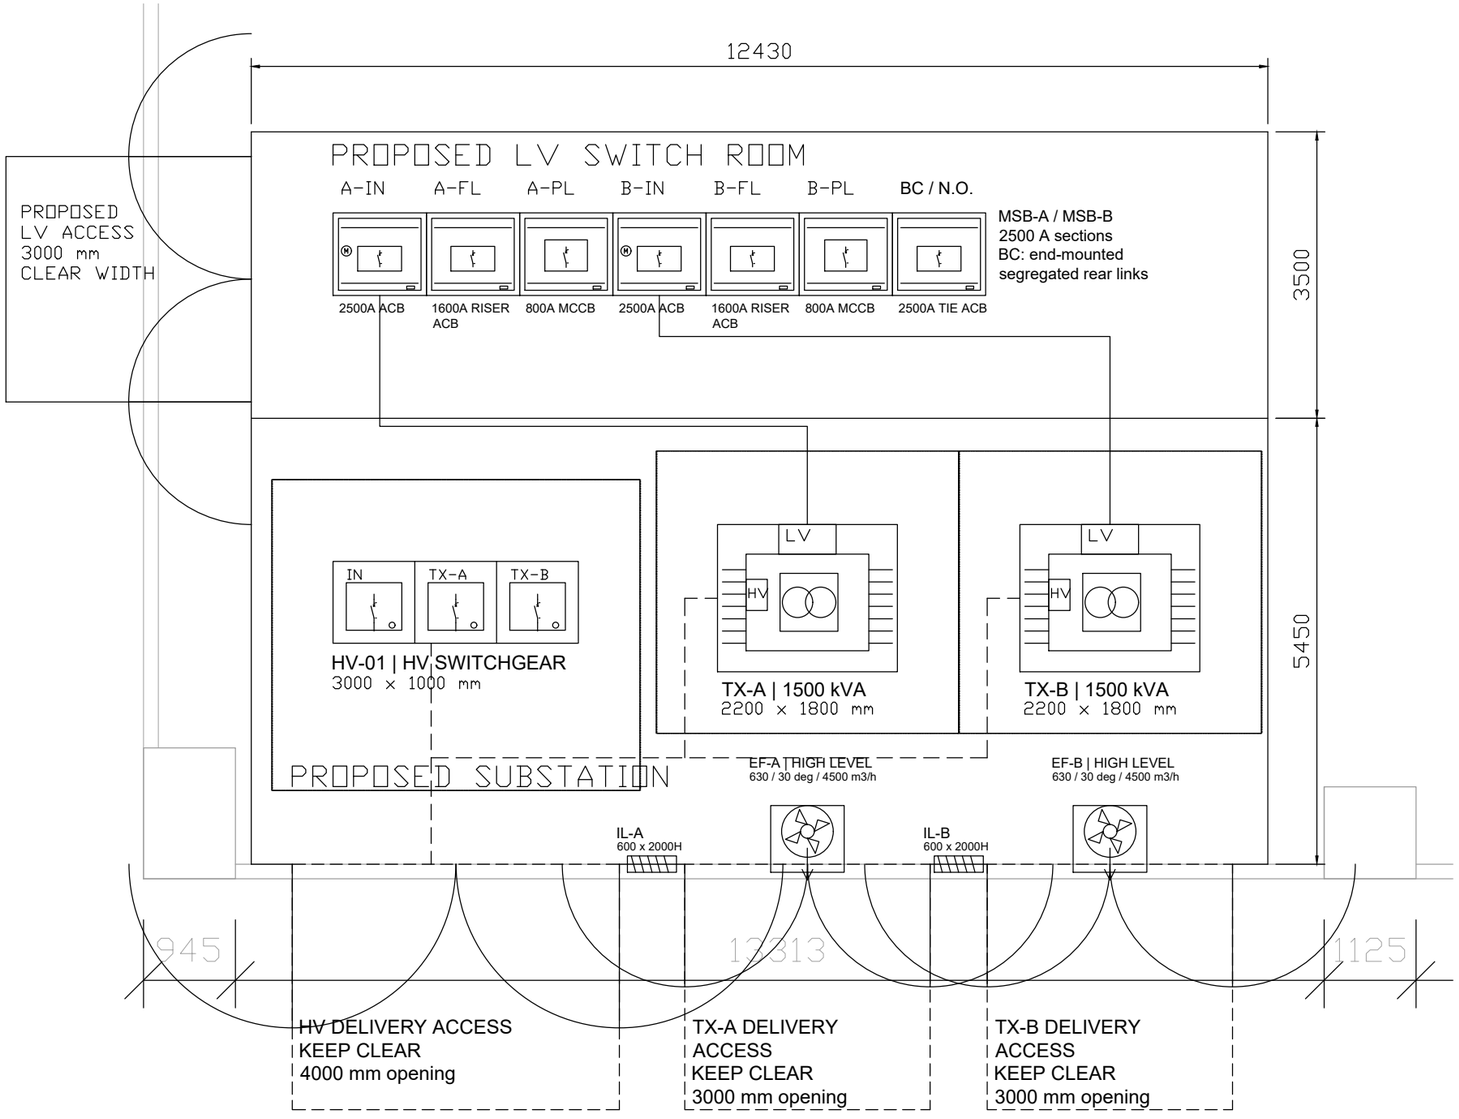

LINE KEY: dashed line = HV trench; solid line = LV route; dashed box = delivery clearance. Equipment details diagrammatic.

LV INTERFACES / HV ROUTES

LV trench: 1000 W x 1100D, four MCTs per interface. A: 8.03+2=10.03m; B: 8.31+2=10.31m (<20m). 2m is assumed total termination/vertical allowance.

HV centre-lines: 1000 W at panels; 600 W branches; final 300 W; generally 1400D. Segregate HV/LV. Covered trenches; no beam obstruction.

DETAIL 1:75 AT A3

EQUIPMENT

TX-A/B: CLP 1500 kVA each; demand 2672.216 kVA.
HV-01: incomer + two transformer protection panels.
MSB: two 2500 A sections, seven 1140 mm bays.
BC: normally-open 4P end coupler with segregated rear links. See main schematic for interlocking.

CLEARANCES / BUILDING WORKS

HV: rear 1000, front 1800, sides 750 mm.
TX: LV terminals 900, other sides 750 mm.
LV board: front 1500, rear 990 mm; total width 7980 mm.
Proposed 2 h FRR partitions, sealed penetrations and FFL 150 mm above external level.

ACCESS AND DOORS

Proposed south delivery access: >=3000 mm clear route; unloading within 20 m.
HV opening 4000 mm; TX openings 3000 mm each; proposed height 2800 mm.
Outward-opening doors shown at 90 degrees; adjacent doors used sequentially.
TX-A wicket access; independent west LV entrance.


VENTILATION

EF-A/B: 630 mm / 30 deg / 700 rpm; each 4500 m3/h at 70 Pa; <=58 dB(A) at 1 m (COP101 6.6).
IL-A/B: 600 x 2000H mm, >=50% free area; total 1.20 m2.
High-level ducts: 900 x 750 mm; discharge >=2.5 m above street. Thermal calculation: Task 1.

CLP COP215 Rev07; COP101 v16, 4.3 and 6.1-6.7.
Equipment selections and calculations accompany this drawing.

TASK 1 | MAIN DISTRIBUTION, PROTECTION AND METERING

REV04 | 380/220 V, 3-phase 4-wire + PE | Single-line diagram, not to scale | Normal supply only

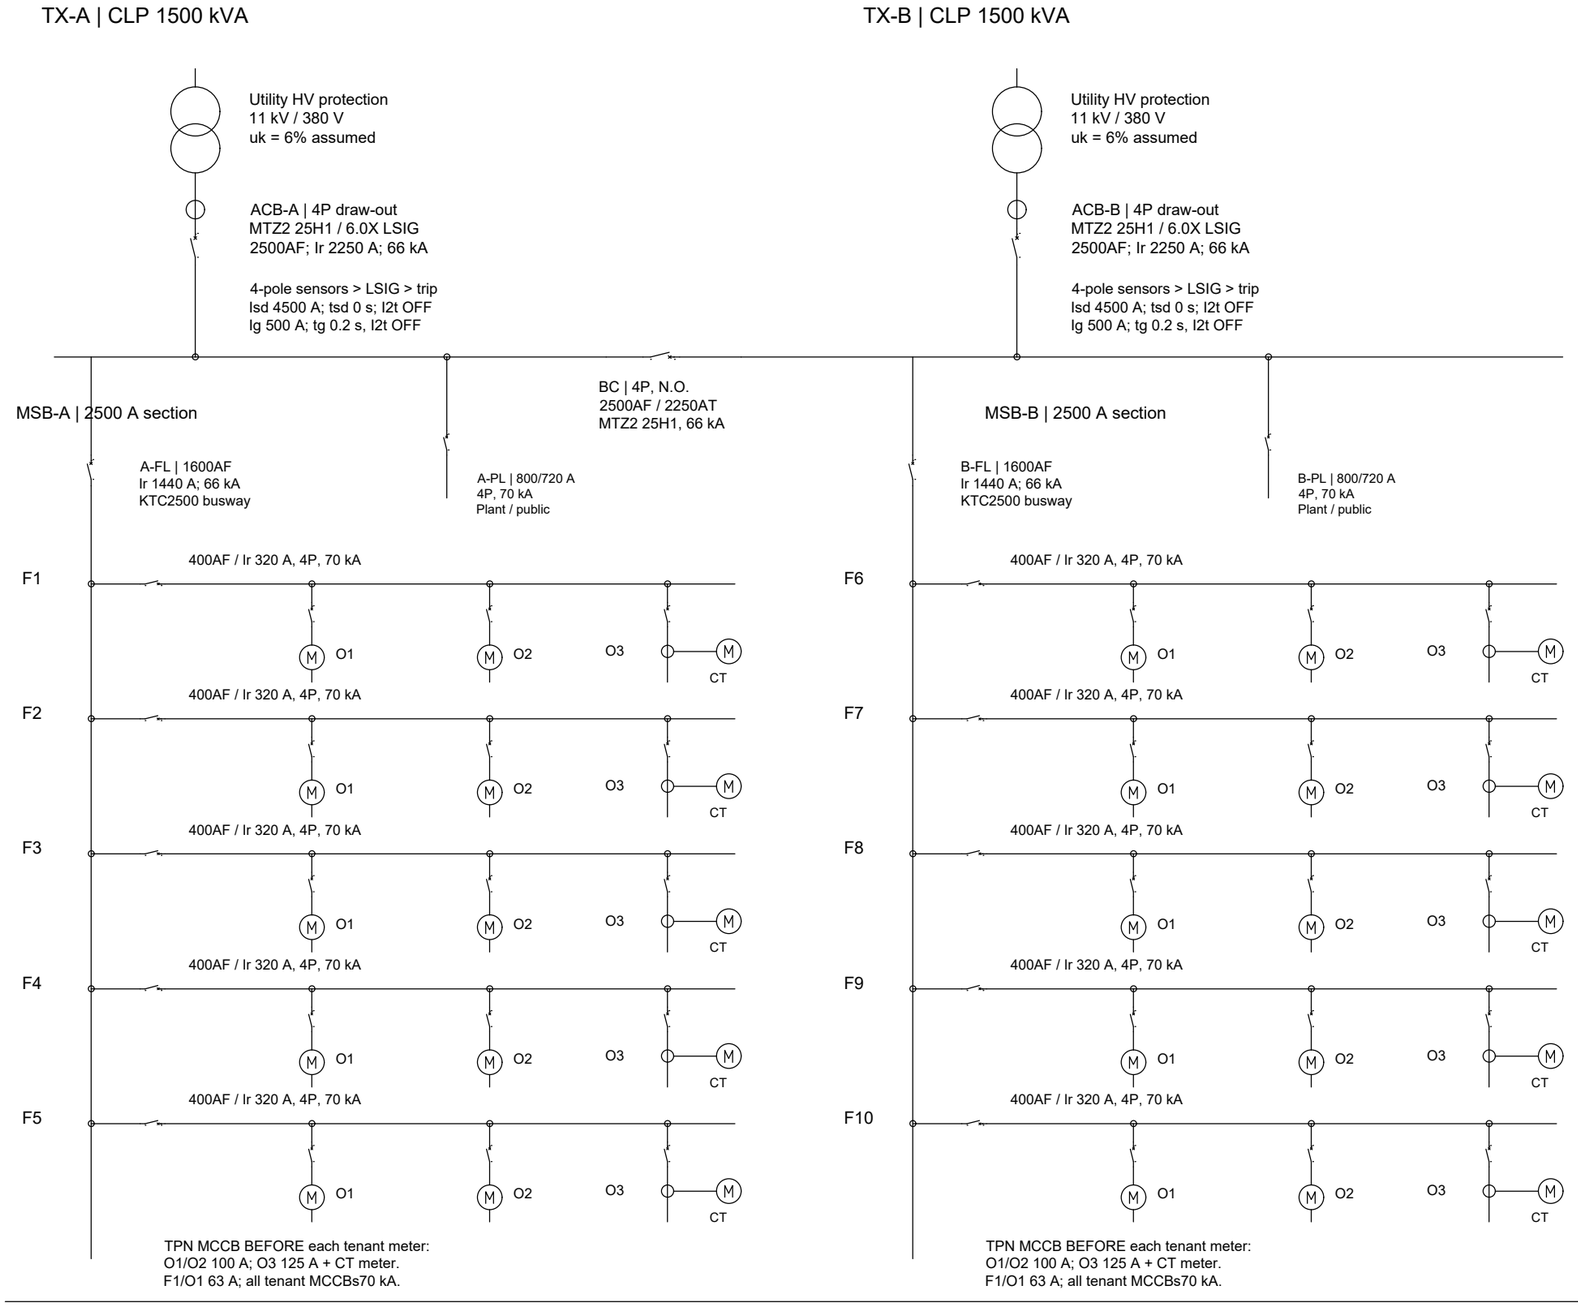

F1 / OFFICE 1 | DETAILED FEEDER

From F1 320 A floor MCCB
MS-O1: ComPacT NSX100H
C10H4TM063, 4P4D TM63D
Ir 63 A; Icu/Ics 70 kA
Suitable for isolation

CLP tenant meter
Immediately after MS-O1

4C35 mm2 PVC Cu
+ separate CPC16 mm2
L = 31.5119 m
28.5119 plan + 3 m allowance

DB-O1: 100 A 4P isolator
15 x 1P+N Type A 30 mA RCBO
7 lighting + 8 power circuits


PE continuous; neutral switched with phases.
No customer N-PE link at DB.

ACB-A / ACB-B / BC INTERLOCK

Electrical AND mechanical interlock
Normal: CLOSED / CLOSED / OPEN
Transfer from A: CLOSED / OPEN / CLOSED
Transfer from B: OPEN / CLOSED / CLOSED
ALL THREE CLOSED: PROHIBITED

Open/isolate failed incomer before closing BC.
Before transfer, shed load to <=1480.9 kVA
(2250 A at 380 V); no full-load N-1.
Utility return: open BC before restoring incomer.

CUSTOMER EARTHING

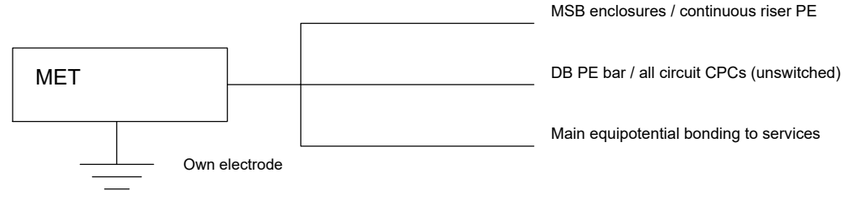

BASIS AND FAULT DUTY

CLP GuideToSupply v10: sections 2, 3, 7.4, 11.
MSB PFC <=56.92 kA incl. transfer motors.
Own MET/electrode; any CLP bond only by agreement, >=70 mm2 Cu. See Task 3 for loop, disconnection and conductor checks.
CT meters: CLP ratios +16 A HRC voltage fuses; Guide sections9.11 and9.16.

2672.216 kVA building demand | 1336.108 kVA / 2030 A per normal section | CT/sensor arrangement subject to CLP acceptance

Task 2 – Layout drawings and MCB board schematics

The office tenant chosen for layout design: Office 1.

Design considerations of circuit arrangement and protective device selection for small power and lighting layout:

Selected tenant: Office 1. The attached lighting/power plans, completed board template and detailed L/N/PE schematic present the design.

Lighting. Normal lighting uses 92 PIL PLATO 600 panels: sixty 22 W, twenty-eight 28 W and four 38 W, total 2256 W. Seven circuits LC-A–LC-G have 18/17/18/11/14/10/4 lamps, each protected by B10 Type A 30 mA 1P+N RCBO. Each has its own neutral and local manual control S-A–S-G. Different-phase switches use separate enclosures. Ceiling-grid and furniture relationships guide positions.

Lighting performance. Manufacturer LDT calculations give maintained mean direct illuminances of 592.9/546.3/588.5/662.6 lx for the open office/pantry/upper east/south east rooms at 1.9 m above the workplane and MF 0.80. Four 38 W panels in the south east room retain 589.2 lx at 2.2 m, providing a 17.8% margin above the 500 lx design target. The continuation gives the calculation method and room results.

Power. Small-power provision comprises nine four-socket floorboxes, three twin sockets and FS01. Socket assemblies each have one upstream 13 A FCU; WH01 has a 10 A DP FCU. P1–P4 use 6 mm^2 A1 rings/B32, P5/P6/P8 use 10 mm^2 A2 radials/B32, and P7 uses a 4 mm^2 dedicated radial/B10. Each local fused spur is 4 mm^2, assumed 0.5 m. FCUs precede the spur cable. The pantry circuits are separated from ordinary office circuits. FS01 supplies WH01, a SHC10 GB Eltron heater: 1.4 kW at 220 V; design current 6.364 A and 10 A protection.

Protection and containment. Ring protection requires L/N/CPC continuity, with both ends returning to the same circuit under EMSD Table 6(1)'s A1 ring conditions. The lighting group, ring banks A/B, radial bank C, P7 and incoming feeder remain separate to preserve the stated grouping factors, as shown on the installation-detail sheet.

Supply and controls. The supply uses source TM63D 4P4D protection, 4C35 mm^2 + CPC16 and 100 A 4P DB isolation. Dedicated neutrals pass through their own RCBO; PE is unswitched. RCBO ratings and backup protection are checked in Task 3. Landlord emergency lighting and exit signs use independent essential supplies.

Task 2 – Layout drawings and MCB board schematics (continued)

The office tenant chosen for layout design: Office 1.

Normal lighting and local controls

The lighting design uses 92 PIL PLATO 600 MultiPower 3117955 panels on the 600 mm ceiling grid: sixty 22 W, twenty-eight 28 W and four 38 W, totalling 2256 W. Separate circuits serve the enclosed rooms and distributed main-office zones, with a maintained mean illuminance target of 500 lx adopted for the design. The connected lighting density is 7.301 W/m^2 using the adopted 309 m^2 office area.

Seven passive manual switches S-A–S-G provide local control of their corresponding circuits. These switches must have a minimum rating of 20 AX, an LED switching capacity of at least 600 W and make/break/inrush compatibility with the selected drivers. Since their phases differ, S-A/B/C use separate enclosures. No borrowed neutral is allowed. Each route passes through its switch and includes a 2 m DB rise plus 1.5 m down and 1.5 m back at the switch, giving an assumed vertical allowance of 5 m per lighting radial. Passive controls add no operating power.

Circuit	Lamps	W	Phase	RCBO	Control
LC-A	18	402	L1	B10	S-A
LC-B	17	392	L2	B10	S-B
LC-C	18	396	L3	B10	S-C
LC-D	11	242	L3	B10	S-D
LC-E	14	392	L2	B10	S-E
LC-F	10	280	L1	B10	S-F
LC-G	4	152	L3	B10	S-G

On the plan, the A/B/C numeric labels correspond to the LED IDs and circuits LC-A/B/C. D01–D11 correspond to PN01–PN11, E82–E96 excluding E90 to the northeast LEDs, F01–F10 to UE01–UE10, and G01–G04 to SE01–SE04.

Lighting calculation

To assess lighting performance, the calculation uses manufacturer LDT intensities given in cd/klm, with each profile scaled by its selected flux: 2843.45 lm at 22 W, 3555.30 lm at 28 W and 4685.55 lm at 38 W. Illuminance is then calculated at each workplane grid cell, with spacing at most 0.2 m, as

$$E = 0.80 \sum_j \frac{I_j(C,\gamma)\cos\gamma}{d_j^2}.$$

A luminaire-to-workplane height of 1.9 m is adopted, corresponding to a 2.7 m ceiling and a 0.8 m workplane. The maintenance factor of 0.80 assumes periodic cleaning and replacement. Room boundaries use the adopted plan envelopes; each room receives light from its own fittings. Only direct light is included in this calculation.

Task 2 – Layout drawings and MCB board schematics (continued)

Zone	Lamps	Area m^2	Mean lx	Min/mean
Open office	67	231.87	592.9	0.136
Pantry	11	29.54	546.3	0.390
Upper east room	10	33.68	588.5	0.267
South east room	4	13.07	662.6	0.175

On this basis, all four mean illuminances exceed the adopted 500 lx target. To provide mounting-height tolerance, the four south-east panels use the 38 W setting. At 2.2 m above the workplane, the respective means are 573.0, 505.8, 545.0 and 589.2 lx; the south-east room retains a 17.8% margin.

Min/mean ratios include perimeter cells. These direct-light results do not establish task-area uniformity or glare performance.

Small power and fixed equipment

Small-power provision includes nine four-socket floor boxes, three twin wall sockets and the fixed connection FS01. Each floor-box/socket assembly is individually 13 A fused. The demand calculation uses a 13 A continuous capacity per assembly; FS01 supplies WH01, a STIEBEL ELTRON SHC10 GB Eltron 235232 undersink water heater. Its 1.4 kW at 220 V gives 6.364 A at unity power factor; the selected protection is B10 with a 10 A double-pole FCU. Building central AC is supplied as central plant and not duplicated in this office DB.

P1–P4 are A1 rings with fused floor-box connections. P5/P6/P8 are A2 radials, while P7 is a fixed radial. Both P6 and P8 serve the PANTRY identified on the source plan, with FB09 and SO01 connected to P6. P8 is a separate socket group for convenient isolation. Kitchen sockets are separated from ordinary office circuits under EMSD6E(3)(a).

Circuit	Points	Phase	Topology	Protection
P1	FB01, FB02	L1	A1 ring	B32
P2	FB03, FB04	L1	A1 ring	B32
P3	FB05, FB06	L2	A1 ring	B32
P4	FB07, FB08	L2	A1 ring	B32
P5	SO02	L1	A2 radial	B32
P6	FB09, SO01	L3	A2 radial	B32
P7	FS01/WH01	L3	Fixed radial	B10
P8	SO03	L3	A2 radial	B32

Circuit service envelopes meet the A1 limit of 100 m^2 and A2 limit of 50 m^2. Envelopes may overlap; they are not summed as office area. Connection and containment details follow.

Task 2 – Layout drawings and MCB board schematics (continued)

FCU and containment details

Each FB01–FB09 floorbox and SO01–SO03 twin socket shares one upstream 13 A FCU. FS01 uses a 10 A DP FCU and accessible earthed socket for WH01; retain the appliance cord and plug. Use accessible terminals rated for the 6/10 mm^2 main conductors. Place each FCU before its 4 mm^2, 0.5 m local spur; switch N with L and keep PE continuous. The demand basis is 13 A per socket assembly and 6.364 A for WH01.

Keep separate Method B containment banks: LC-A–G (seven circuits, $C_g = 0.54$); P1/P2 and P3/P4 (four ring legs per bank, 0.65); P5/P6/P8 (three radials, 0.70); P7 alone (1.00); incoming feeder alone (1.00). Overlapping plan routes indicate corridors, not shared enclosures.

Under EMSD A5(3), Note 2, provide horizontal cable clearance between banks exceeding twice the largest adjacent cable diameter. Space enclosures to maintain that clearance; partitions alone do not provide thermal separation. Keep each circuit's L/N/CPC together and clear of thermal insulation. Recalculate grouping factors if this arrangement changes.

Protection and board arrangement

The DB schematic shows NSX100H TM63D four-pole protection at MS-O1 before the CLP meter, 4-core 35 mm^2 plus CPC16, a 100 A four-pole DB isolator, independent L1/L2/L3/N/PE bars and 15 separate 1P+N Type A 30 mA RCBOs. Each circuit has a dedicated RCBO neutral and labelled phase; PE is unswitched.

Check driver inrush and protective-device coordination against the Task 3 requirements.


Emergency lighting assumption

Landlord emergency lighting and exit signage use independent essential supplies, separated from normal lighting under EMSD 6B(4). These feeds bypass tenant normal-lighting switches and RCBO load sides. Emergency-system loads are therefore outside this office normal-supply DB.

DB-O1: 8-way TPN chassis; 15 used single-phase outgoing positions

Way	L1	L2	L3
1	LC-A / B10	LC-B / B10	LC-C / B10
2	LC-F / B10	LC-E / B10	LC-D / B10
3	P1 / B32	P3 / B32	LC-G / B10
4	P2 / B32	P4 / B32	P6 / B32
5	P5 / B32	Blanked	P7 / B10
6	Blanked	Blanked	P8 / B32
7	Blanked	Blanked	Blanked
8	Blanked	Blanked	Blanked

Positions indicate phase allocation; each RCBO also needs its own N path. Confirm chassis capacity for the selected 1P+N devices. The incoming protection is TM63D 4P4D at MS-O1, while the local main switch is 100A 4P (including N), supplementing the template's TP SW symbol. The detailed appended schematic governs neutral/PE connections and ring returns. All final RCBOs are Type A, 30mA, 10kA and must meet the energy/inrush specifications.

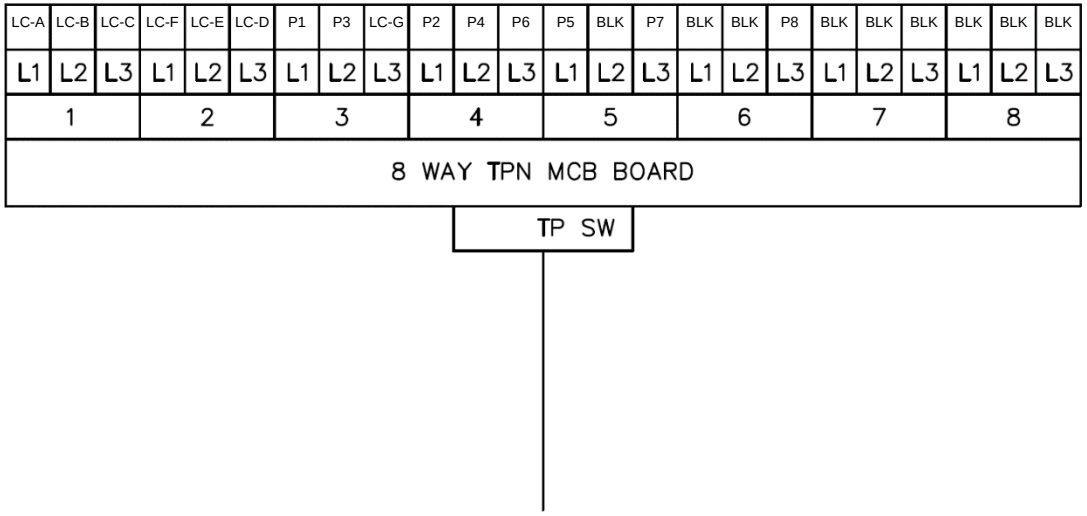

MCB BOARD SCHEMATIC

Notes
Office 1 DB-O1

15 outgoing circuits
7 lighting / 8 power
Unused ways blanked
BLK = blanked

Client
N/A

Project
BSE3124 - Group 1

Drawing
Office 1 distribution board schematic

Date 10 Nov 2026

Project number Group 1


Drawing number E-03

Scale NTS

TASK 2 | OFFICE 1 NORMAL LIGHTING

A3 PORTRAIT | SCALE 1:75 | DIMENSIONS IN mm | DB-O1

Full MS-O1-to-DB route: see incoming-route and ring-detail sheet.

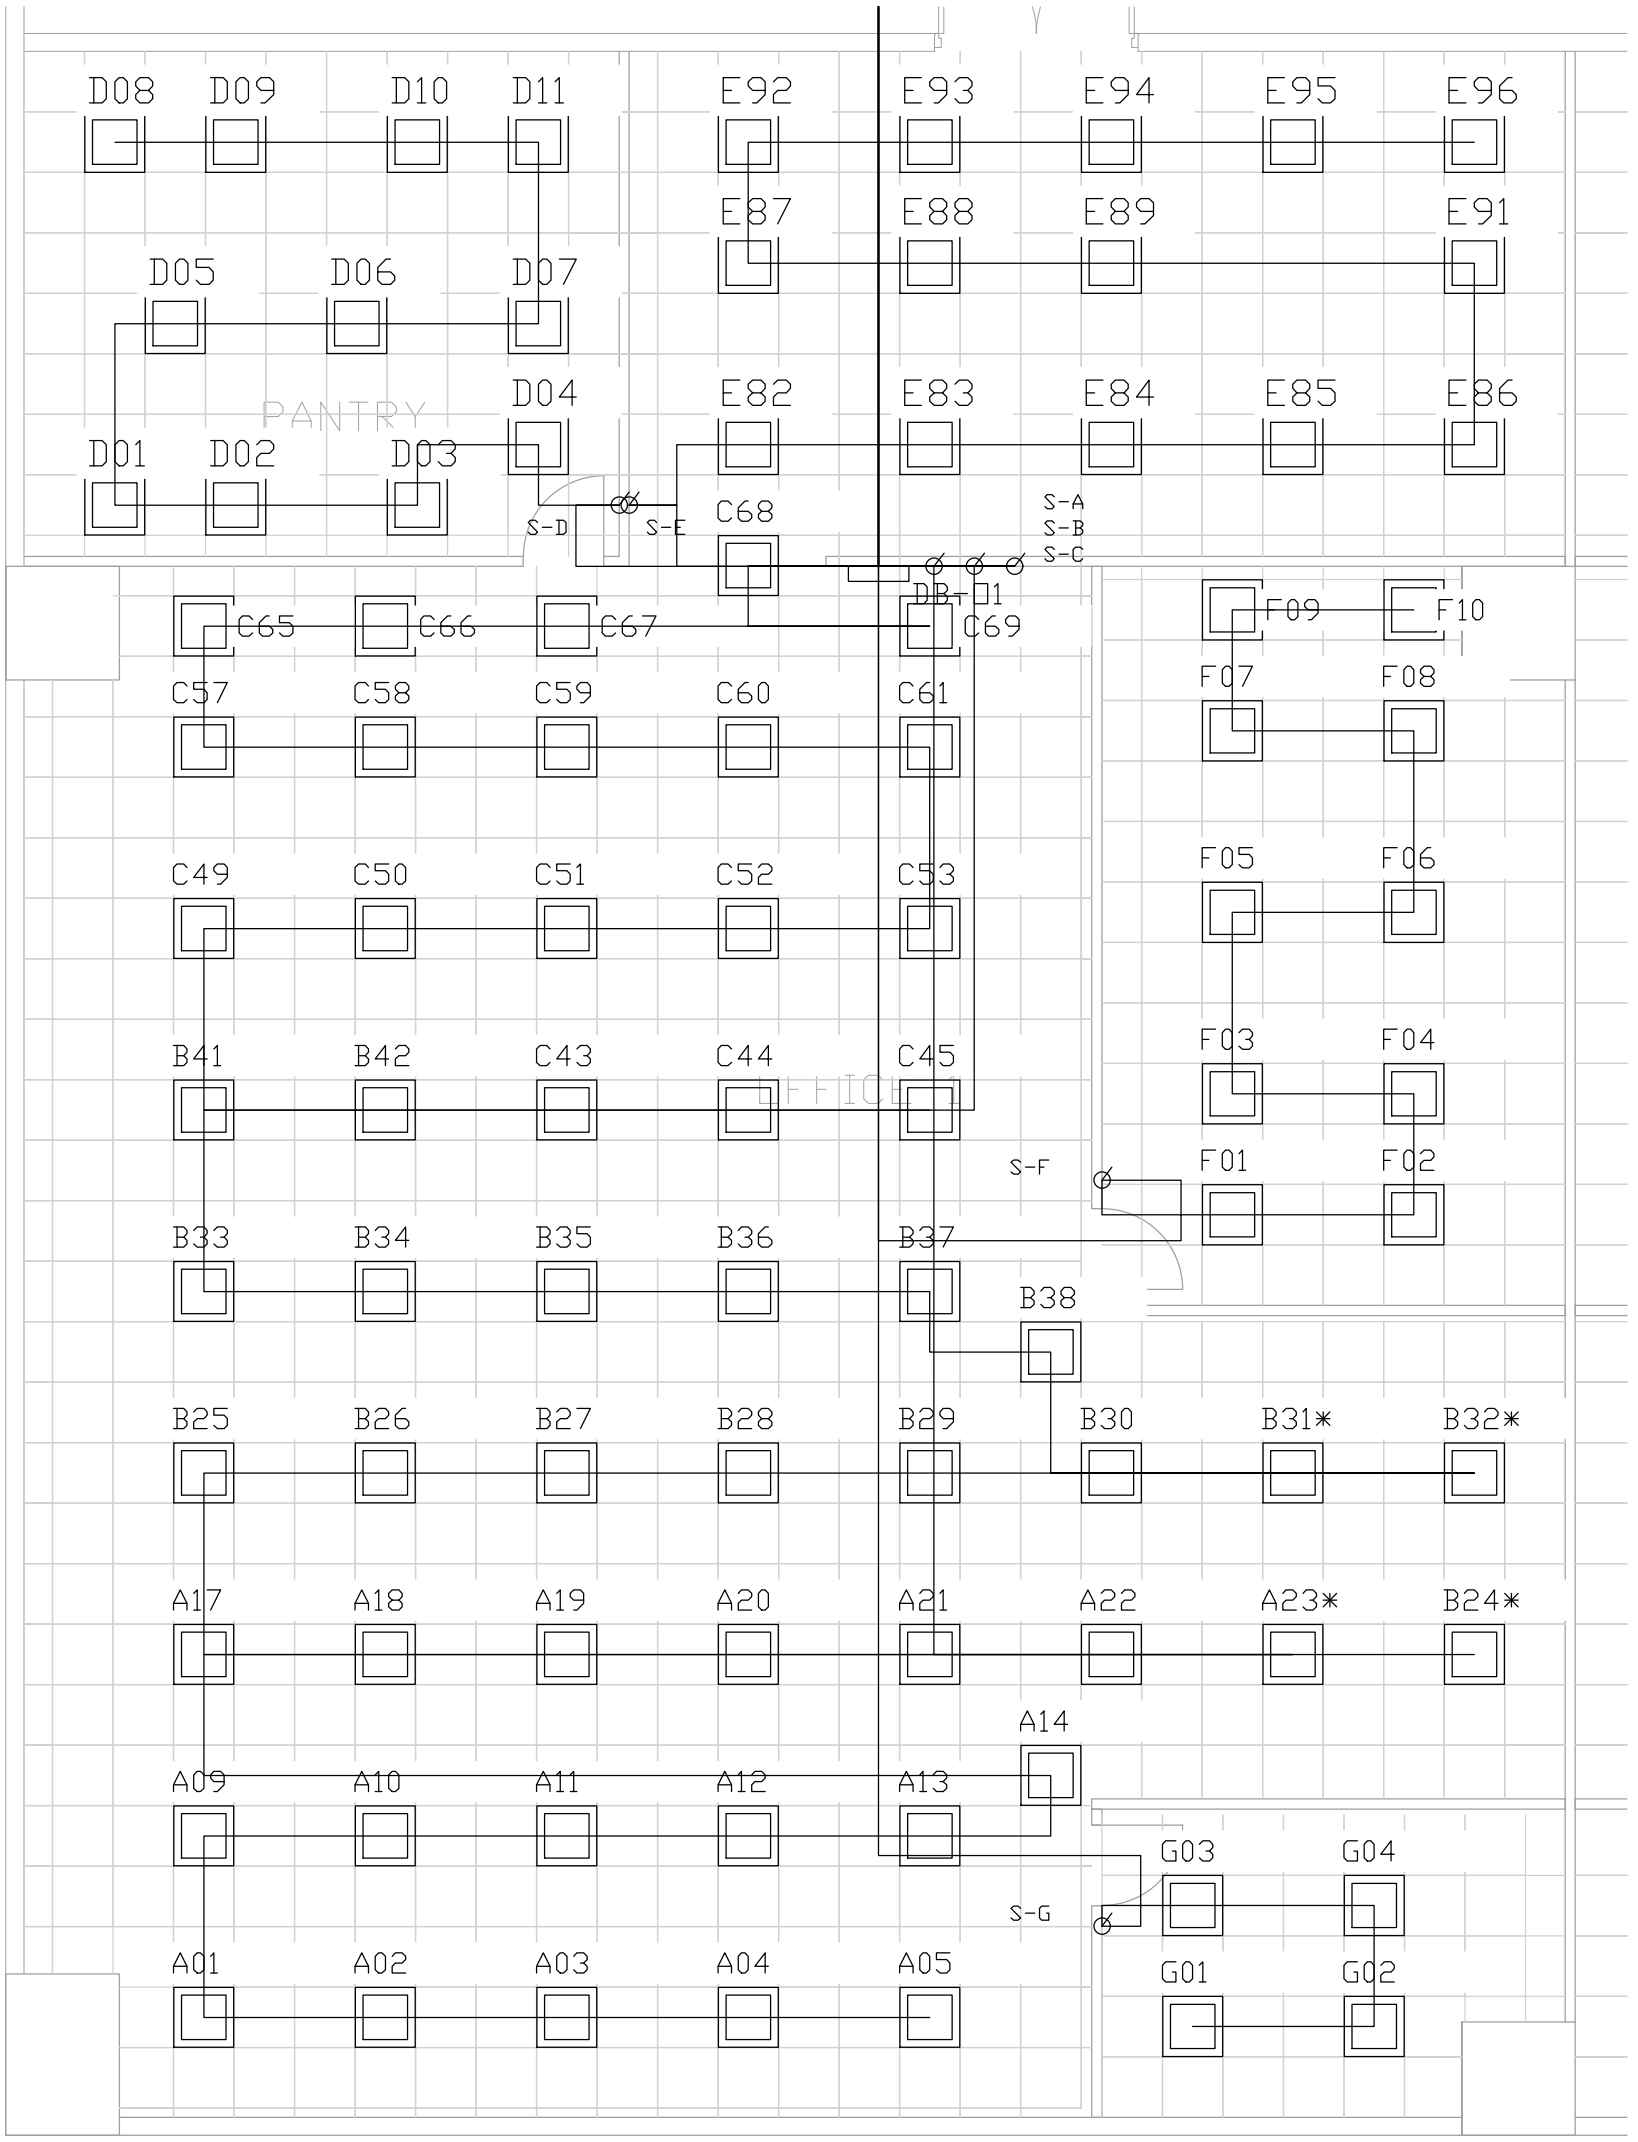

600x600 LED panel: A/B/C=22 W, *=28 W; D=22 W; E/F=28 W; G=38 W.

Label prefix gives LC-A ... LC-G; suffix retains device ID. S-A ... S-G = local switches.

LC-A L1 18 lamps /402 W B10 2.5 mm2 58.301m
LC-B L2 17 lamps /392 W B10 2.5 mm2 62.184m
LC-C L3 18 lamps /396 W B10 2.5 mm2 44.999m
LC-D L3 11 lamps /242 W B10 2.5 mm2 27.233m
LC-E L2 14 lamps /392 W B10 2.5 mm2 34.464m
LC-F L1 10 lamps /280 W B10 2.5 mm2 32.710m
LC-G L3 4 lamps /152 W B10 2.5 mm2 27.379m

92 panels /2256 W. All circuits: Type A 30 mA1P+N RCBO; L/N/CPC all2.5 mm2.

Manual controls20 AX, LED rating>=600 W; separate phase enclosures. Inrush compatibility required.


Normal lighting only. Landlord emergency/exit system independently supplied (design assumption).

Proposed routes follow plan; vertical/tail allowances and conditions are in Task3. Architecture retained as reference.

TASK 2 | OFFICE 1 NORMAL POWER

A3 PORTRAIT | SCALE 1:75 | DIMENSIONS IN mm | DB-O1

Full MS-O1-to-DB route: see incoming-route and ring-detail sheet.

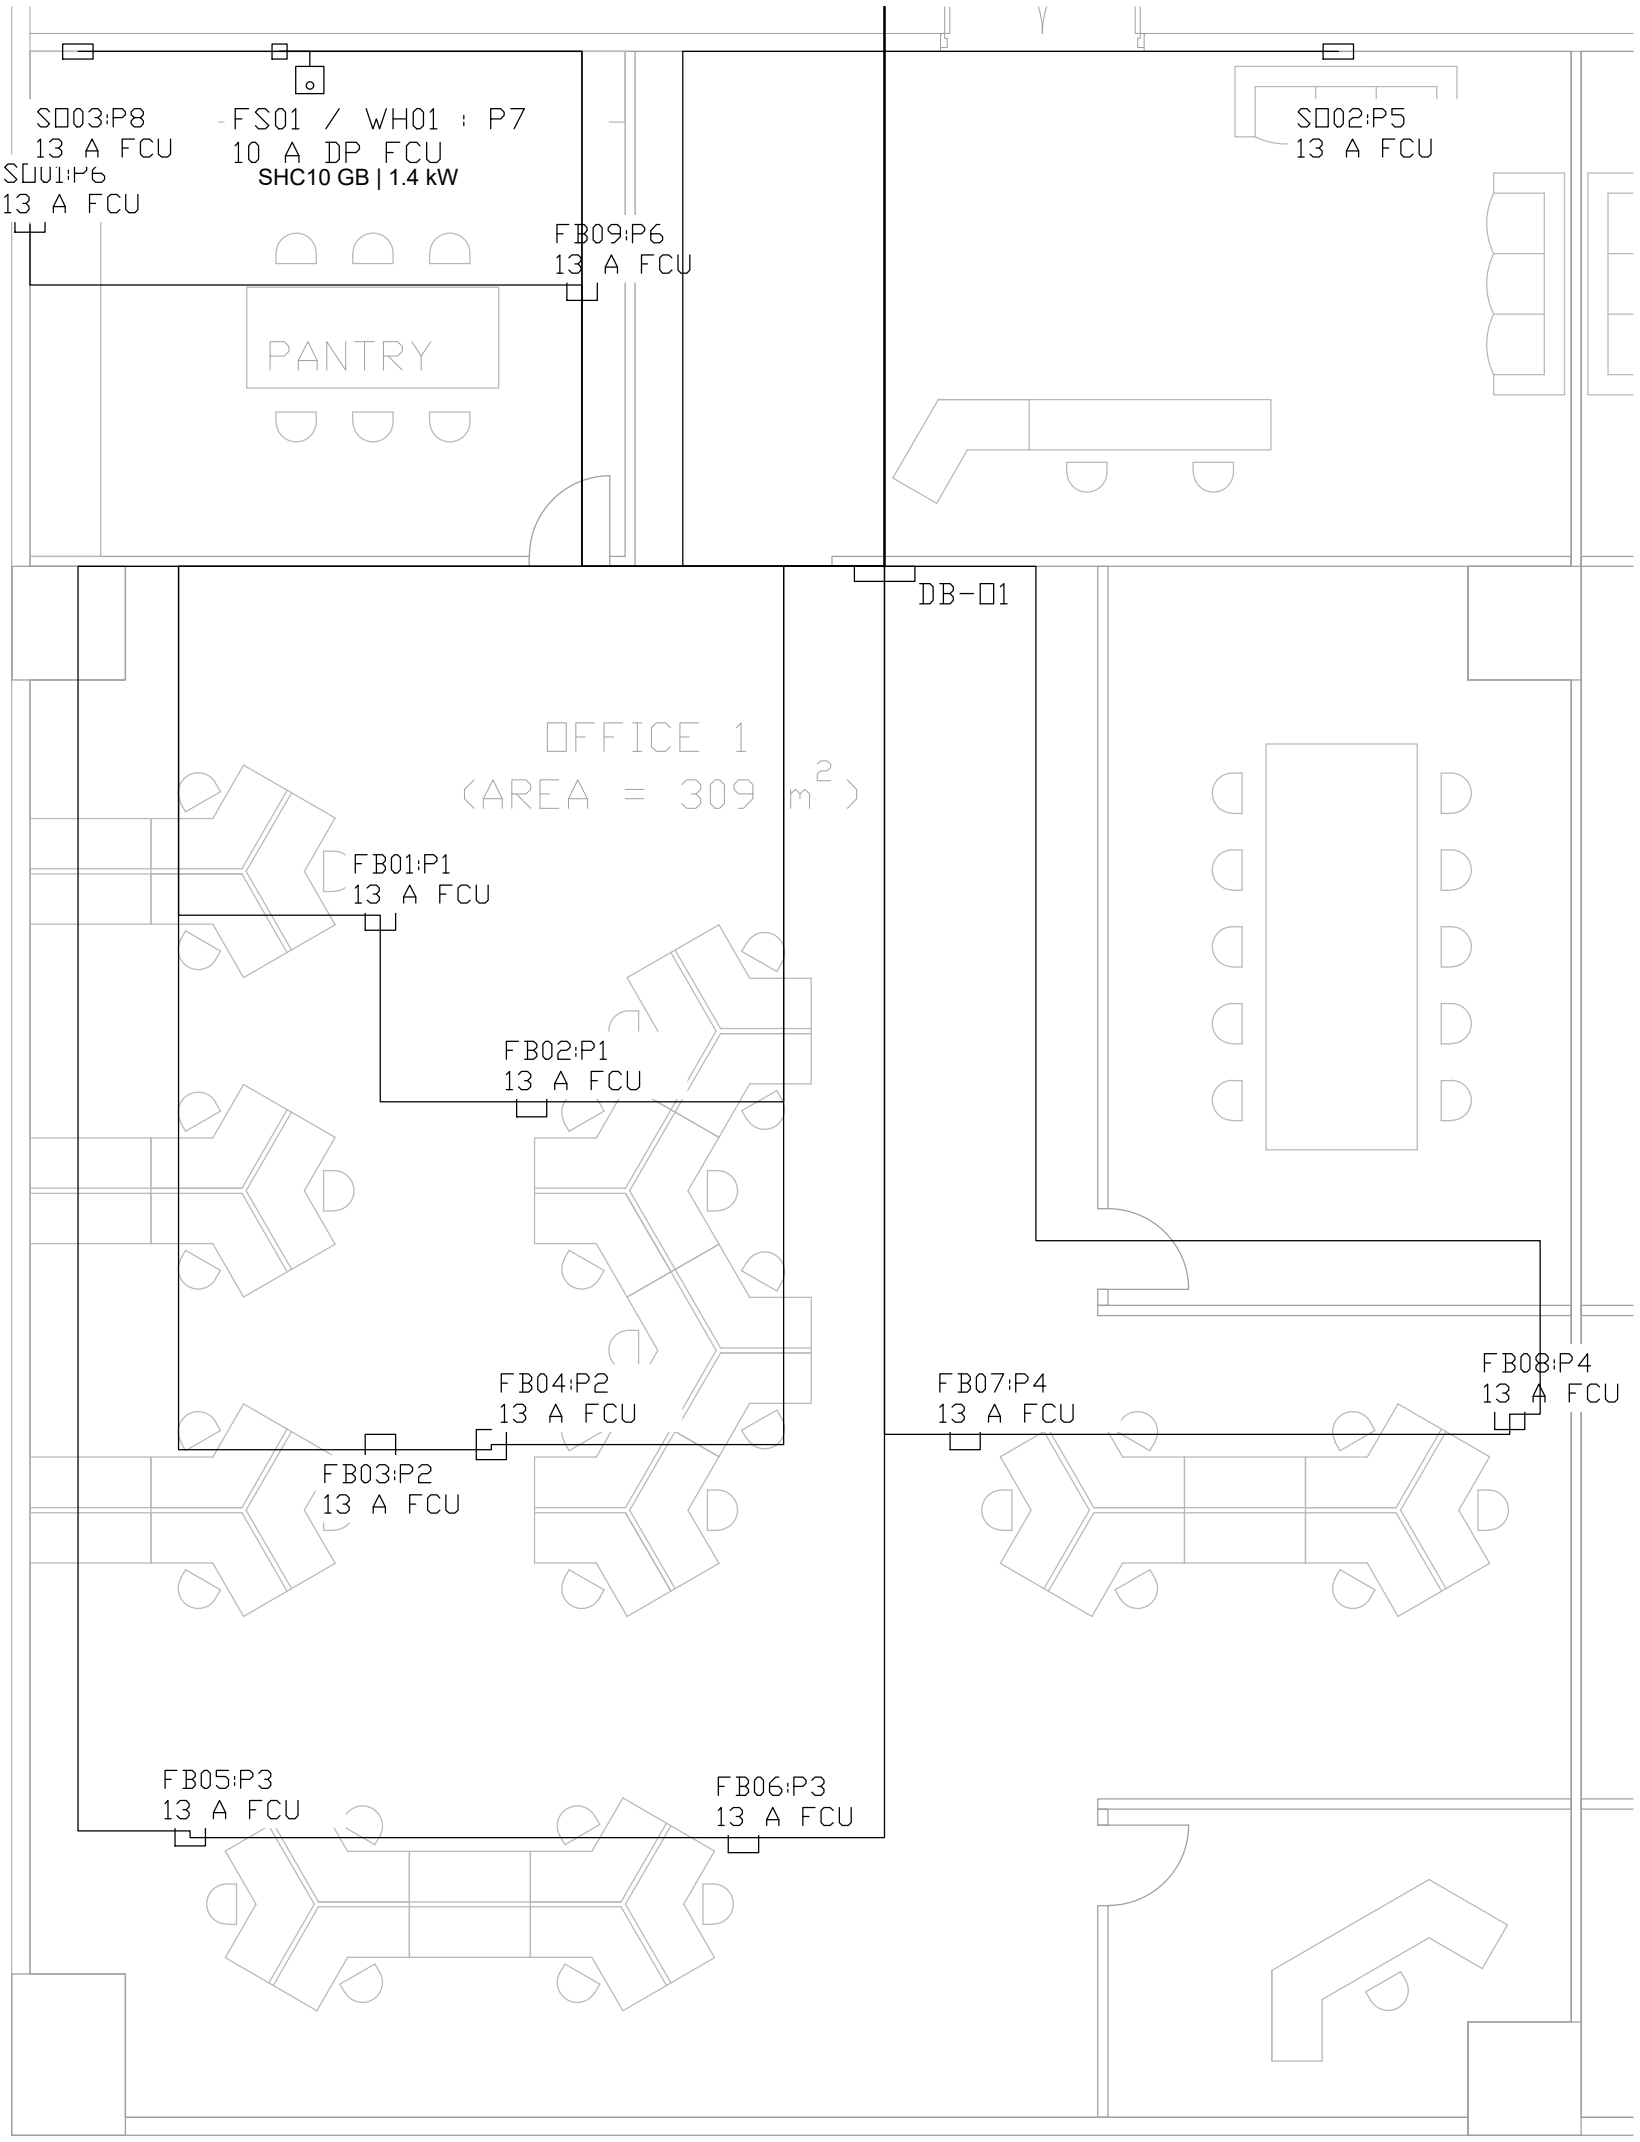

FB01-09=floorbox; SO01-03=twin socket; FS01=WH01 heater connection assembly.

Socket assemblies:13 A FCU each. WH01:10 A DP FCU. Local spur4 mm2,0.5m allowance.

P1 L1 RING B32 6 mm2 28.620m

P2 L1 RING B32 6 mm2 35.520m

P3 L2 RING B32 6 mm2 45.220m

P4 L2 RING B32 6 mm2 34.220m

P5 L1 RADIAL B32 10 mm2 15.607m

P6 L3 RADIAL B32 10 mm2 13.864m

P7 L3 RADIAL B10 4 mm2 13.107m | WH01 6.364A

P8 L3 RADIAL B32 10 mm2 15.107m

Ring L/N/CPC both ends return to same circuit. Radial L/N/CPC same stated size.

WH01: SHC10 GB Eltron235232, 1.4kW/220V; FS01 on P7 with B10 +10A DP FCU.


Containment: rings P1/P2 bank A; P3/P4 bank B; radials P5/P6/P8 bank C; P7 separate.

Individually fused point assemblies and terminals must accept selected conductor size or rated junctions.

Proposed routes follow plan; vertical/tail allowances and conditions are in Task3. Architecture retained as reference.

TASK 2 | OFFICE 1 DISTRIBUTION BOARD DB-O1

A3 LANDSCAPE | NOT TO SCALE | DB-O1 | 100 A TPN | 15 OUTGOING CIRCUITS

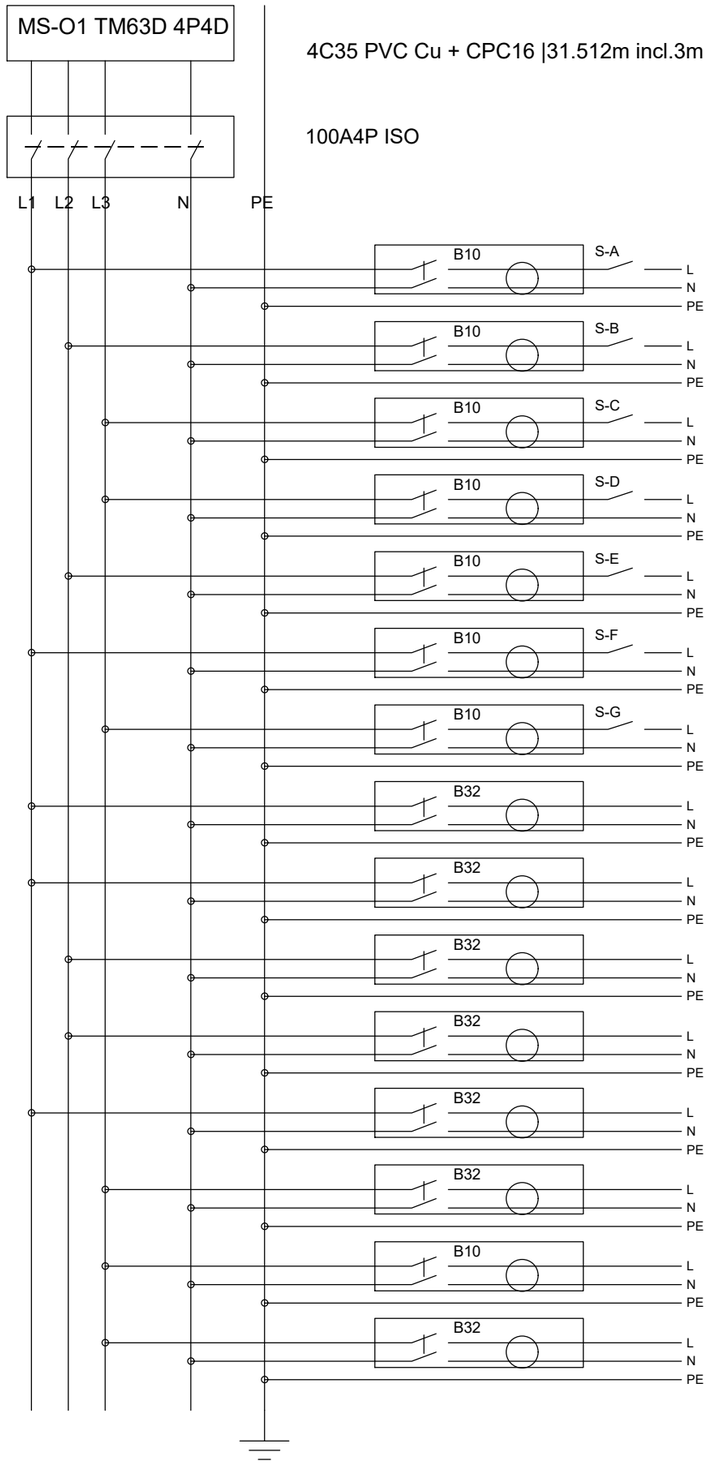

MS-O1: NSX100H TM63D 70 kA before meter. DB assembly>=25 kA; RCBO backup per Schneider A-198. Protection checks: Task 3.

Landlord emergency/exit systems: independent essential supply assumed; electrically separate from this normal DB.

LC-A [L1] | 18 lamps +S-A /402 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=58.301m | LIGHTING RADIAL

LC-B [L2] | 17 lamps +S-B /392 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=62.184m | LIGHTING RADIAL

LC-C [L3] | 18 lamps +S-C /396 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=44.999m | LIGHTING RADIAL

LC-D [L3] | 11 lamps +S-D /242 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=27.233m | LIGHTING RADIAL

LC-E [L2] | 14 lamps +S-E /392 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=34.464m | LIGHTING RADIAL

LC-F [L1] | 10 lamps +S-F /280 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=32.710m | LIGHTING RADIAL

LC-G [L3] | 4 lamps +S-G /152 W | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 2.5/2.5/2.5 mm2 | L=27.379m | LIGHTING RADIAL

P1 [L1] | FB01, FB02 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 6/6/6 mm2 | L=28.620m | A1 RING: L/N/PE BOTH ENDS AT DB

P2 [L1] | FB03, FB04 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 6/6/6 mm2 | L=35.520m | A1 RING: L/N/PE BOTH ENDS AT DB

P3 [L2] | FB05, FB06 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 6/6/6 mm2 | L=45.220m | A1 RING: L/N/PE BOTH ENDS AT DB

P4 [L2] | FB07, FB08 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 6/6/6 mm2 | L=34.220m | A1 RING: L/N/PE BOTH ENDS AT DB

P5 [L1] | SO02 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 10/10/10 mm2 | L=15.607m | DEDICATED RADIAL

P6 [L3] | FB09, SO01 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 10/10/10 mm2 | L=13.864m | DEDICATED RADIAL

P7 [L3] | WH01 via FS01 /1.4 kW | B10 /TYPE A 30 mA 1P+N RCBO
L/N/PE 4/4/4 mm2 | L=13.107m | DEDICATED RADIAL

P8 [L3] | SO03 /13 A FUSED POINTS | B32 /TYPE A 30 mA 1P+N RCBO
L/N/PE 10/10/10 mm2 | L=15.107m | DEDICATED RADIAL

SYMBOLS: box = linked L+N RCBO; circle = residual sensing; dots = junctions; crossings without dots are not connected. PE bypasses all switches.

Dedicated RCBO neutrals; ring L/N/CPC ends return to their own circuit terminals. Local spurs: sockets 13 A / WH01 10 A; 4 mm2 L/N/CPC, 0.5 m assumed.

S-A/B/C in separate phase enclosures. Manual controls 20 AX / LED>=600 W; verify driver inrush.

TASK 2 | OFFICE 1 INSTALLATION DETAILS AND DESIGN CONDITIONS

A3 LANDSCAPE | NOT TO SCALE | DIMENSIONS IN mm | OFFICE 1

1. EVERY POWER ASSEMBLY HAS AN UPSTREAM FCU: SOCKETS13 A / WH01 10 A

Accessible main/ring junction

DP switched FCU at tap
13 A sockets /10 A WH01

4 mm2 L/N/CPC spur
0.5m assumed

ONE assembly: FB / SO / WH01
Sockets share13 A; WH01 load6.364 A



For rings: both L/N/CPC ends return to their own DB terminals. FCU is before the spur; no unfused extra taps. Main terminals must accept 6/10 mm2.

FB01-09:13 A FCU per four-socket floorbox. SO01-03:13 A FCU per twin socket. FS01:10 A DP FCU for WH01.

2. SEPARATE CONTAINMENT BANKS - OVERLAPPING PLAN LINES ARE ROUTING CORRIDORS

Lighting LC-A..G	A: P1/P2	B: P3/P4	C: P5/P6/P8	P7 alone	Feeder alone
7 circuits / Cg0.54	4 ring legs / Cg0.65	4 ring legs / Cg0.65	3 radials / Cg0.70	Cg1.00	Cg1.00

Method B, no insulation contact. Keep L/N/CPC of each circuit together. Between banks provide horizontal cable clearance >2x largest adjacent cable OD

(EMSD A5(3) Note2); separate enclosures and verify cable clearance. A partition alone is not thermal separation. If grouping changes, recalculate sizes.

3. A1 RING DESIGN BASIS AND EQUIPMENT SPECIFICATION

EMSD 6C/6E, Table6(1): B32; 6 mm2 copper; corrected leg Iz23.1855 A >=20 A; each service envelope <=100m2; intact L/N/CPC rings; two fused taps per ring.

Calculated ring-leg current 14.658-15.203 A. Verify L/N/CPC continuity; A1 overload conditions apply.

Protection: NSX100H TM63D 70 kA; RCBO backup per Schneider A-198. Task 3 gives fault, earth-loop and total-energy checks.

Controls: 20 AX, LED>=600 W; verify driver inrush. PE remains continuous.

4. LIGHTING DESIGN BASIS


LIGHTING: 92 panels / 2256 W. LDT results and maintained-illuminance assumptions: Task 2.

South-east room: four 38 W panels; 589.2 lx mean at 2.2 m above workplane.

Adopted height1.9m and MF0.80 with periodic cleaning. Direct-light calculation; see report for room geometry and perimeter illuminance.

TASK 2 | FULL INCOMING ROUTE AND RING RETURN DETAIL

REV04 | F1 / Office 1 | Locator viewport 1:170; electrical detail not to scale

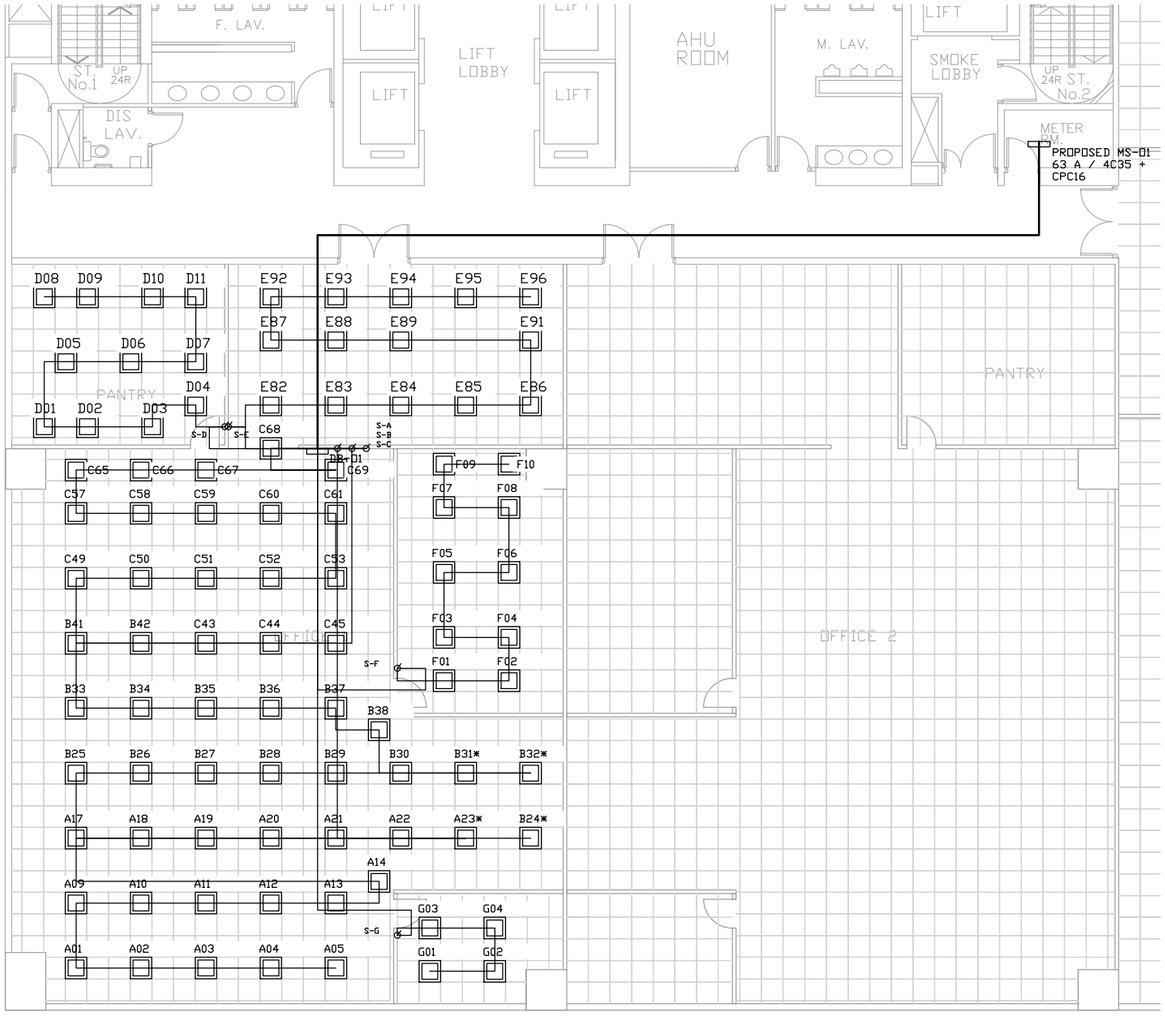

LUMINAIRE SCHEDULE

REF NO.	SYMBOL	DESCRIPTION	AMPS

MS-O1 -> DB-O1 | complete proposed route

Plan: 2.600 + 20.000 + 5.9119 = 28.5119 m.
Add 3.000 m vertical/meter-tail allowance.
Design length = 31.5119 m; not as-built.
Source and DB positions are proposed on supplied plan.
Origin -> F1 tap: separate 28 m busway allowance;
not inferred from this tenant-plan viewport.

4C35 PVC Cu + CPC16 | TM63D 63 A at MS-O1
CLP meter follows source MCCB; DB has 4P isolation.

P1-P4 | L, N AND CPC RINGS

Both ends return to the SAME circuit terminals.

L OUT OF RCBO | 6 mm2

N OUT OF SAME RCBO | 6 mm2

CPC TO PE BAR | 6 mm2

Two individually fused taps per ring; no unfused additions.

EACH FLOORBOX / SOCKET TAP

13 A DP FCU -> SO / FLOORBOX

Fuse in L; N linked to DP isolation; PE continuous.
After FCU: 4 mm2 L/N/CPC, 0.5 m allowance.
P7 is a separate radial: 10 A DP FCU -> WH01.
Do not mix RCBO neutrals or circuit ring ends.
Verify L/N/CPC ring continuity before energising.

PROTECTION REFERENCE
Main diagram and Task3 govern the MS-O1 MCCB,
manufacturer backup, fault bounds and earthing.
This sheet adds route visibility and connection detail;
device and circuit counts remain 112 / 15.

Task 3 – Maximum current demand calculation and cable sizing

Maximum current demand calculation:

Lighting current is calculated as $I = P/(220 \times 0.90)$. Under EMSD Table 7(1), the demand includes 90% of lighting and 100% of the largest Code 6E circuit plus 50% of the remaining circuits on each phase. P7 is allocated separately at 100%. The 13 A per assembly is an intended maximum continuous load, not an instantaneous fuse clamp.

Phase	Light A*	Sockets A	Fixed A	Demand A
L1	3.444	45.500	0	48.600
L2	3.960	39.000	0	42.564
L3	3.990	32.500	6.364	42.455

*Lighting column is before the 90% factor. Thus, the maximum demand of **48.600 A** leads to the selection of 63 A source protection and a 100 A DB. Maximum undiversified phase allowance is 68.444 A. Full branch currents are retained for outgoing cable sizing.

Cable sizing for the incoming circuit to the distribution board:

The selected feeder is 4-core 35 mm^2 PVC copper plus 16 mm^2 CPC, using Method B. Its 28.5119 m route plus an assumed 3 m vertical/termination allowance totals 31.5119 m. At 40 °C, $C_a = 0.87$, $C_g = 1$; the calculation adopts $C_h = 0.86$ for the stated third-harmonic range (15–33%).

$$
\begin{aligned}
I_{z,25} &= 80(0.87)(0.86) = 59.856 < 63 \text{ A}, \\
I_{z,35} &= 99(0.87)(0.86) = 74.0718 \text{ A}, \\
I_b &= 48.600 \le I_n = 63 \le I_z = 74.0718 \text{ A}.
\end{aligned}
$$

These ratings follow EMSD A6(2), column 5, while CPC sizing follows Table 11(2)(a). A full-size neutral is retained; neutral current must remain within the adopted bound.

At design demand, feeder drop is 1.945239 V. The calculated upstream allowance is 1.027900 V: distribution drop 1.351%, worst complete path 2.232%. The 63 A feeder stress case gives 2.494%, below 4%. TN-S and origin $Z_e \le 0.18\,\Omega$ are declared acceptance conditions; the derived DB loop is 0.260051 Ω. TM63D and final B-curve disconnection checks pass under these conditions. Maximum-fault and backup checks follow.

Outgoing circuits are also included, as required by the assignment: all 15 sizes, currents, lengths, voltage drops, earth-fault checks and apparatus energy requirements are tabulated in the continuation.

Task 3 – Maximum current demand calculation and cable sizing (continued)

Incoming design conditions

The selected tenant is first-floor Office 1. MS-O1 is a 4P4D ComPacT NSX100H TM63D MCCB immediately before the CLP meter, providing isolation and 63 A protection. The 4C35 mm^2 PVC copper feeder has CPC16 mm^2. Its 28.5119 m plan route plus 3 m vertical/meter-tail allowance gives 31.5119 m from MS-O1 through the meter to DB-O1. Assumed Method B, 40 °C, separate containment and 15–33% third harmonic give $I_z = 99(0.87)(1)(0.86) = 74.0718$ A; $48.6 < 63 < 74.0718$. The 25 mm^2 alternative gives only 59.856 A. The full-size neutral and its loading limit are retained.

The phase-neutral feeder bound uses $(2/\sqrt{3})(1.10) = 1.270170592$ mV/A/m: 1.945239 V at the 48.600 A design-demand/neutral-current envelope, and 2.521606 V in the separate 63 A stress check. The upstream drop is calculated from the busway model below.

All outgoing cables

All outgoing cable sizes refer to PVC copper L/N/CPC conductors. Lighting grouped separately has $I_z = 24(0.87)(0.54) = 11.2752$ A for seven 2.5 mm^2 circuits; all $I_b \leq 10 \leq I_z$. Lighting lengths include 5 m DB/switch vertical allowance.

Each uniform ring bank counts as four current-carrying legs, giving $I_z = 41(0.87)(0.65) = 23.1855$ A per 6 mm^2 leg, above the standard 20 A minimum. With 13 A per point, the ring-network solution gives maximum leg currents 14.658–15.203 A, below I_z. Ring overload protection follows the A1 conditions below.

The 10 mm^2 A2 radial cables have $I_z = 57(0.87)(0.70) = 34.713$ A; P7's separate 4 mm^2 radial has $I_z = 32(0.87) = 27.84$ A. In determining route lengths, the power radials include a 2 m vertical allowance, while the rings include 2 m at each DB end. Each local point spur adds 0.5 m of 4 mm^2 cable.

Circuit	Phase	I_b A	RCBO A	L/N/CPC mm^2	Main length m
LC-A	L1	2.030	10	2.5	58.301
LC-B	L2	1.980	10	2.5	62.184
LC-C	L3	2.000	10	2.5	44.999
LC-D	L3	1.222	10	2.5	27.233
LC-E	L2	1.980	10	2.5	34.464
LC-F	L1	1.414	10	2.5	32.710
LC-G	L3	0.768	10	2.5	27.379
P1	L1	26.000	32	6	28.620
P2	L1	26.000	32	6	35.520
P3	L2	26.000	32	6	45.220
P4	L2	26.000	32	6	34.220
P5	L1	13.000	32	10	15.607
P6	L3	26.000	32	10	13.864
P7	L3	6.364	10	4	13.107
P8	L3	13.000	32	10	15.107

Complete voltage drop and fault checks

The origin is the customer main incomer outgoing terminals. Adopt a maximum 28 m developed MSB-to-F1 busway route (design allowance), with phase fundamental current 1374.458

Task 3 – Maximum current demand calculation and cable sizing (continued)

A and neutral fundamental current at most 10% of that value. KTC2500 has hot $Z = 0.021$ mΩ/m. Allow 10% impedance tolerance and 0.05 V for internal links/connections: $\Delta V_{up} = 1374.458(1.10)(0.000021)(28)(1.10) + 0.05 = 1.027900$ V. Meter tails are already included in the feeder allowance. The distribution segment is $(1.027900 + 1.945239)/220 = 1.3514\% < 1.5\%$. Worst final drop is $1.936871/220 = 0.8804\% < 2.5\%$. These classroom allocations are checked at design demand; the separate 63 A feeder stress check remains below the 4% total limit. Harmonic voltage distortion is outside this fundamental-frequency calculation; the assumed phase balance must be maintained.

For minimum earth-fault current, adopt TN-S and an origin external-loop acceptance limit of 0.18 Ω (design acceptance condition). The busway hot phase–PE resistance/reactance are 0.282/0.170 mΩ/m (Canalis table, printed p.143). A conservative $R + X$ envelope gives $(0.282 + 0.170)(28)(1.1)/1000 + 0.002 = 0.015922$ Ω, including connections. Hence Z_e at MS-O1 is 0.195922 Ω, and adding the feeder 0.064129 Ω gives 0.260051 Ω at DB-O1. Final-circuit checks retain hot conductor paths, minimum voltage factor 0.95 and B10/B32 reference limits of 4.17/1.31 Ω. Uniform ring paths use the conservative quarter-circumference bound.

Circuit	Out drop V	Total drop %	Z_s ohm	Min fault A	Z_s limit ohm
LC-A	1.450	2.010	1.309	159.6	4.17
LC-B	1.237	1.914	1.379	151.5	4.17
LC-C	0.959	1.787	1.070	195.3	4.17
LC-D	0.422	1.543	0.750	278.6	4.17
LC-E	0.797	1.714	0.880	237.4	4.17
LC-F	0.642	1.643	0.849	246.2	4.17
LC-G	0.345	1.508	0.753	277.6	4.17
P1	1.269	1.928	0.318	657.7	1.31
P2	1.675	2.113	0.330	632.6	1.31
P3	1.937	2.232	0.348	600.4	1.31
P4	1.428	2.000	0.328	637.2	1.31
P5	0.964	1.790	0.334	625.3	1.31
P6	1.310	1.947	0.327	640.0	1.31
P7	0.953	1.784	0.410	510.1	4.17
P8	0.936	1.777	0.332	629.5	1.31

All 15 design-demand voltage checks pass; the maximum is 2.232%. Using 63 A for the feeder instead gives a maximum full-path stress bound of 2.494%. Final-circuit minimum fault currents exceed $5I_n$. For TM63D, the manufacturer magnetic setting is 500 A; allowing +20% gives 600 A. The incoming minimum earth-fault current is $209/0.260051 = 803.69$ A > 600 A; the TM63D curve (DOCA0187EN-04 p.235) gives instantaneous-region disconnection, conservatively below 0.1 s.

Overload and total clearing energy

CPC thermal withstand is checked using $k = 115$ for bunched PVC copper CPCs initially at 70 °C (11(2)(c)), with total $I^2t \leq (kS)^2$ required. The incoming NSX100H is rated 70 kA; final RCBOs have 10 kA standalone ratings plus the documented NSX100H backup combination below. B-curve devices must limit class 3-equivalent total energy to at most 70,000 A^2s for B10 and 90,000 for B32. Accordingly, the selected RCBOs must have manufacturer total-clearing-energy data that meet these limits. Corresponding CPC withstands are 82,656.25 (2.5 mm^2), 211,600 (4), 476,100 (6) and 1,322,500 (10), each above the required device bound.

Task 3 – Maximum current demand calculation and cable sizing (continued)

Incoming NSX100H TM63D total energy must be at most 1,000,000 A^2s over the relevant fault range, below CPC16 withstand 3,385,600. The 4 mm^2 local spurs are also short-circuit protected by their upstream B32/B10 RCBOs: use the conservative 90,000 A^2s RCBO bound, below their 211,600 A^2s withstand. The FCU still provides the stated point overload protection and must meet its 6 kA interruption duty.

For WH01, $I_b = 1400/220 = 6.364 < 10 < 27.84$ A, and the manufacturer specifies 10 A protection. Its 10 A FCU gives $I_2 = 1.9(10) = 19 < 28.2576$ A for the local spur. The assumed 0.5 m local allowance exceeds the 0.448 m drawn connection. The appliance assembly has an accessible earthed socket and double-pole isolation with at least 3 mm contact separation, following manual section 10.4.

Under socket fuse overload conditions, $I_2 = 1.9(13) = 24.7$ A. Spur $I_z = 32(0.87)(0.70) = 19.488$ A gives $1.45I_z = 28.2576 > 24.7$ A. Overload suitability of P1–P4 is assessed using the standard A1 arrangement in EMSD 6C, 6E and Table 6(1), Note 1(i): 32 A protection, copper size at least 2.5 mm^2, corrected per-leg capacity at least 20 A, served area at most 100 m^2, intact L/N/CPC rings and evenly distributed outlets. The 6 mm^2 rings meet these conditions, with exactly two individually 13 A fused taps per ring. The actual point-fault calculation gives a maximum 5.147 kA at FB09, below the 6 kA fuse interruption rating; it includes incoming and branch resistance up to the FCU, without credit for the downstream spur. The design assumes an FCU ambient temperature of at most 35 °C and a board apparatus ambient temperature of at most 30 °C; a containment temperature of 40 °C remains the conservative cable condition.

Maximum fault current and manufacturer backup

For the cold-copper fault bound, assume indoor conductor temperature at least 0 °C, effective area at most 110% nominal and conductivity at most 102% IACS. NBS Handbook 100 gives $\rho_{20} = 1/58$ $\Omega mm^2/m$ and $\alpha_{20} = 0.00393/K$. Thus the effective lower bound is $\rho_0/(1.10 \times 1.02) = 0.014159$; use the still lower 0.014. Upstream resistance and all reactance are omitted, making the derived maximum current conservative.

For the 35 mm^2, 31.5119 m feeder, $R_{ph,min} = 0.014(31.5119)/35 = 0.012605\ \Omega$. The DB bounds are therefore

$$I_{LN,max} = \frac{1.1(220)}{2R_{ph,min}} = 9.600 \text{ kA}, \quad I_{3ph,max} = \frac{1.1(380)}{\sqrt{3}R_{ph,min}} = 19.147 \text{ kA}.$$

The phase–phase bound is 16.582 kA and the phase–earth bound, including CPC16, is 6.024 kA. Specify the complete DB assembly, including isolator, with at least 25 kA verified fault duty for its protective combination.

Schneider LVPED318033EN, printed A-198 (PDF p.206), lists ComPacT NSX100H upstream of iC60H RCBO (voltage-dependent): reinforced breaking capacity 40 kA for 6–20 A devices and 25 kA for 32–45 A devices, at 380–415 V / 220–240 V phase-neutral. These exceed the 19.147 kA envelope. The selected A9D31810/A9D31832 are the corresponding voltage-dependent Type A products. This documented backup relationship addresses multiphase faults; it does not establish full selectivity. The standalone 10 kA rating also exceeds the calculated 9.600 kA line-neutral fault.

For each point FCU, add branch resistance before its terminals: radial actual chainage plus the 2 m vertical allowance; for rings use $l_a l_b/(l_a + l_b)$. No credit is taken for the 0.5 m spur after the fuse. The worst result is FB09 at 5.147 kA, below 6 kA. Total-clearing-energy limits specified above remain

Task 3 – Maximum current demand calculation and cable sizing (continued)

required for the complete apparatus combination and relevant fault types; backup breaking capacity by itself does not prove conductor thermal protection.

Main earth-fault protection and earthing

Use four-pole MicroLogic 6.0X LSIG sensing on each draw-out main incomer, with $I_g = 500$ A and $t_g = 0.2$ s, I^2t OFF. Including +10% pickup tolerance gives 550 A. With the declared origin-loop limit of 0.18 Ω, the minimum earth-fault current is $0.95(220)/0.18 = 1161$ A. The manufacturer maximum breaking time for this setting is below 0.20 s (DOCA0102EN-12 pp.118–119), below the CLP 5 s requirement. The electronic phase/neutral sensing arrangement and settings require utility acceptance.

Provide the customer's own electrode, MET and continuous protective/bonding conductors (CLP Supply Rules 301/304; GuideToSupply section 11). Any agreed CLP earth bond is at least 70 mm^2 copper and cannot be the sole earth path; verify the customer loop with the optional bond disconnected as required. The 0.18 Ω value is a design acceptance condition, not achieved electrode resistance or a site test. Do not create an N–PE bridge in the tenant DB. If the agreed supply/earthing arrangement cannot meet this condition, the protection design must be recalculated.

Additional sources: Schneider Canalis KT DEBU024EN, printed pp.143–145 (busway data); Schneider ComPacT NSX LVPED221001EN, H-44 (energy-limiting curves); DOCA0187EN-04 p.235 (TM63D trip curve); LVPED318033EN A-198 (cascading); CLP GuideToSupply v10 sections 2, 3 and 7.4.

Main over-current setting and CLP curve

Adopt main-incomer $I_r = 2250$ A, short-time pickup $I_{sd} = 2I_r = 4500$ A, $t_{sd} = 0$ s and I^2t OFF. With +10% pickup tolerance, the short-time function is active by 4950 A. DOCA0102EN-12 p.110 gives a maximum breaking-time envelope below 0.08 s at this setting. This is below the minimum approximately 0.09 s of CLP GuideToSupply Appendix 1's dashed 2500 A curve over its plotted approximately 5–40 kA range. Set long-time delay to the minimum available 0.5 s at $6I_r$; instantaneous protection remains enabled. Stagger plant starts and limit starting current so that this selected main setting is not exceeded; motor-start and complete utility protection coordination require the actual plant data.

Area input traceability

COP215 loading uses assumed UFA values of 309/309/410 m^2, based on the plan annotations. Verify boundaries and applicable kitchen/common-area exclusions before replacing these assumptions; lighting and circuit service envelopes are not UFA measurements.

References

CLP COP215 Rev 07: clauses 3.1.7 and 3.3.1; Appendices 2 and 7 (building demand). CLP COP101 v16: clauses 4.3, 5.5, 5.6 and 6.1–6.7 (plantroom planning).

EMSD Code of Practice for the Electricity (Wiring) Regulations, 2025: Table 6(1), printed p.56; Table 7(1), pp.65–67; 9B, p.79; Table 11(2), pp.99–100; Table 11(10), p.105; Appendix 5 correction factors and Appendix 6 cable ratings.

Task 3 – Maximum current demand calculation and cable sizing (continued)

Performance in Lighting, PLATO 600 MultiPower 3117955: LOW (22 W), MEDIUMLOW (28 W) and HIGH (38 W) manufacturer LDT files, October 2022. ABB guide 9AKK108468A3912, p.130: B-curve energy references. Eaton TDC180 Technical Data 2042, August 2024, p.2: fuse conventional-fusing and interruption data.

Electrical Schematic 1: transformer, main LV switchboard and floor-metering arrangement. Electrical Schematic 2: final distribution-board schematic conventions.

Task 3 – Maximum current demand calculation and cable sizing (continued)

Selected customer-side apparatus

Item	Selected model / configuration	Design selection
Main incomers	Schneider MasterPact MTZ2 25H1, four-pole draw-out; MicroLogic 6.0X LSIG	2500 A frame; 2250 A pickup; 66 kA
Bus coupler BC	MTZ2 25H1 4P draw-out; 5.0X LSI	2500AF/2250AT; 66 kA; N.O.
Riser busways	Canalis KTC2500 copper, 3L+N+PE	2500 A nominal; 1940 A corrected
Rising supplies	Schneider MasterPact MTZ2 16H1, four-pole; MicroLogic 5.0X	1600 A frame; 1440 A pickup; 66 kA
Floor protection	Schneider ComPacT NSX400H C40H42D400 / MicroLogic 2.3	400 A frame; 320 A pickup; 70 kA
Plant/public	Schneider ComPacT NS800H C080H45AFM / MicroLogic 5.0A	800 A frame; 720 A pickup; 70 kA
MS-O1	Schneider ComPacT NSX100H C10H4TM063	TM63D; 4P4D; 63 A; 70 kA Icu/Ics
LC-A–G and P7	Schneider Acti9 iC60H A9D31810	B10; 1P+N; Type A, 30 mA; 10 kA
P1–P6 and P8	Schneider Acti9 iC60H A9D31832	B32; 1P+N; Type A, 30 mA; 10 kA
WH01 via FS01	STIEBEL ELTRON SHC10 GB Eltron 235232	10 L; 1.4 kW at 220 V; B10 and 10 A DP FCU

ACBs include the listed MicroLogic units. DB-O1 has a 100 A four-pole isolator, eight-way TPN chassis and 15 outgoing devices; unused positions are blanked.

Manufacturer selection references

STIEBEL ELTRON, SHC 10 / SHC 15 operation and installation manual, sections 10.4 and 15.7 (printed p.12): 220 V heater rating, 10 A protection and dimensions. The tabulated rounded current is 6.2 A; this design conservatively uses 1400/220 = 6.364 A.

Schneider Electric, MasterPact MTZ circuit breakers overview: MTZ2 H1 frame range and 66 kA duty at 415 V. Schneider product sheets: C40H42D400 and C080H45AFM establish the selected MCCB ratings.

Schneider product references C10H4TM063, A9D31810 and A9D31832.