

DARKSKY NEXUS

w035


Getting Started & Quick Start Guide

For SDRplay receivers running SDRConnect, and RTL-SDR via rtl_tcp

What is DARKSKY NEXUS?

DARKSKY NEXUS is a companion application for SDRplay receivers running SDRConnect. Install it like any other app (a .dmg on macOS, an installer on Windows) — it runs a local server in the background and opens in your browser, providing a signal intelligence interface, HF utility panel, and a suite of decoders (CW, RTTY, PSK31, NAVTEX, FT8, WSPR, ADS-B, ACARS, AIS, and more).

It can also run with an RTL-SDR dongle via rtl_tcp — no SDRConnect required in that mode.

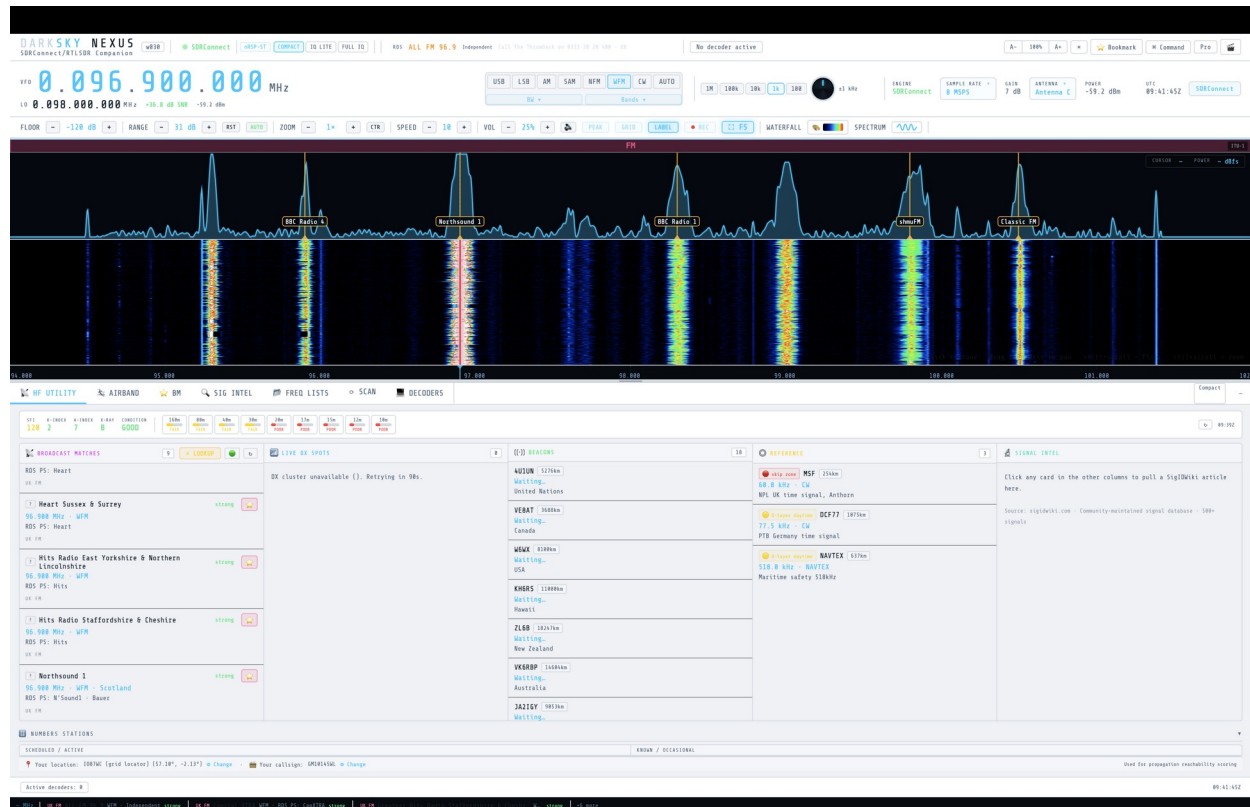

Main NEXUS dashboard — live and connected

New in w031: live decoder testing pass across Rivet, FreeDV, WSPR Beacons, CW Skimmer, and Marine/VHF turned up and fixed several real bugs (see the Troubleshooting guide). NEXUS can now also upload FT8, WSPR, and CW spots to **PSK Reporter** (pskreporter.info) — set your callsign and grid locator in the HF Utility tab's location bar and enable reporting there. A round of UI polish also landed: tab headings now resize to fill the tab bar, the space-weather strip spaces its groups evenly, the AIRBAND tab makes better use of wide columns, and yellow text in light theme now has proper contrast.

Also new in w031 (CW/FT8 follow-up pass): the CW tab's mini-waterfall, keying-scope digit jitter, and stuck decoded-text placeholder were all fixed, and the tab was reorganised into 3 side-by-side sub-columns with a new SKIMMER/SINGLE toggle so nothing requires scrolling to reach (Section 6.2). FT8

INTERNAL's monitor audio distortion was fixed and a **MON VOL** slider added for local playback volume (Section 6.6). The BW dropdown no longer renders oversized, and the FT8 SOURCE buttons now look like buttons instead of plain text. See the Troubleshooting guide for details on each.

New in w035: two new digital-radio decoders — **HD Radio (NRSC-5)** (all HD sub-programs at once, with song/artist tags and station logo art) and **DRM / DRM+** (shortwave/mediumwave/VHF, with a built-in 39-frequency worldwide quick-tune list) — both bundled into the installer, nothing extra to build or install. Startup is also smarter: a first-launch **Connection Setup** wizard picks your radio and can auto-launch SDRConnect for you, and a live status strip shows what's happening instead of a blank screen. Alongside this, a long list of DAB and DRM reliability issues found through live testing were fixed — see the Troubleshooting guide for details. **Requires macOS 14.0 or later** for the packaged macOS build.

Installing DARKSKY NEXUS

NEXUS is distributed as a ready-to-run app — most users never need Python, pip, or any command line. Download the installer for your platform, install it, and launch it like any other app.

macOS

- Two separate downloads, one per Mac type — download whichever matches yours:
- Apple Silicon (M1/M2/M3/M4):
DARKSKY_NEXUS_w035_macOS_AppleSilicon.dmg.
- Intel: **DARKSKY_NEXUS_w035_macOS_Intel.dmg.**
- Not sure which? Apple menu → About This Mac tells you.
- Open the .dmg and drag **DARKSKY NEXUS w035 macOS** into your Applications folder.
- **First launch only:** the app isn't code-signed/notarized, so Gatekeeper will warn it's from an unidentified developer. Right-click (Control-click) the app in Applications, choose **Open**, then confirm in the dialog. This one-time step isn't needed again after the first launch.
- On newer macOS you may instead see a stronger “...app is damaged and can't be opened...” message — that's the same unsigned-app warning, just a harder-blocking version. Fix: drag the app to Applications, then in Terminal run `xattr -cr "/Applications/DARKSKY NEXUS w035 macOS.app"`, then open normally. See the Troubleshooting guide's macOS section for full detail.
- NEXUS starts its local server and opens automatically in Chrome (or your default browser if Chrome isn't installed) at <http://127.0.0.1:8888> — no separate file to open.

Windows

- Download **DARKSKY_NEXUS_w035_Setup.exe**.
- Run it and follow the installer. It installs per-user by default (no administrator rights required) and adds a **DARKSKY NEXUS w035** shortcut to the Start Menu.
- **First launch only:** the installer isn't code-signed, so Windows SmartScreen may show "Windows protected your PC". Click **More info**, then **Run anyway**. This one-time step isn't needed again after the first launch.
- Launch **DARKSKY NEXUS w035** from the Start Menu. NEXUS starts its local server and opens automatically in Chrome (or your default browser) at <http://127.0.0.1:8888>.

Connecting to your radio (first launch)

Connection Setup wizard: the first time NEXUS runs it shows a setup wizard — choose your radio (networked **nRSP-ST**, local USB SDRplay, remote USB, or **RTL-SDR**), and whether NEXUS should launch SDRConnect for you automatically (headless or full GUI) or you'll start it yourself. Your choice is remembered — the wizard won't ask again unless you reopen it from the **Connection** control in the top bar. If both a USB-attached SDRplay and a networked nRSP-ST are available, NEXUS asks which one to use instead of guessing. A live status strip narrates startup progress in plain English instead of leaving the screen blank while it connects.

Prefer to start SDRConnect yourself? Set auto-launch to None in the wizard (or reopen it from the Connection control) and use the manual steps below.

Manual setup: starting SDRConnect yourself

With NEXUS already running and idling (OFFLINE status), launch SDRConnect and let it start up undisturbed. Connect your SDRplay receiver and confirm it's streaming (spectrum/waterfall moving in SDRConnect). NEXUS will connect automatically once SDRConnect's device session is live, and the status will switch to SDRConnect (green).

For a remote SDRConnect server (on another machine on your network), see "Command-Line Options" below for **--sdr**.

For SDRplay nRSP-ST/RSPdx devices, NEXUS now auto-selects **Full IQ** stream mode on connect (changed in w0.2.3 — see "IQ Lite vs Full IQ" below for why).

DARKSKY NEXUS w035

How do you wish to connect?

Pick where NEXUS should get its signal from. This is remembered for next time — change it any time from the Connection control in the top bar.

☒ **nRSP-ST (WS)**
SDRConnect is already running and connected to a networked nRSP-ST

☐ **SDRplay Device (USB)**
A USB-attached SDRplay device (e.g. RSPdx), SDRConnect running on this Mac

☐ **SDRplay Device (WS)**
A USB-attached SDRplay device on a different machine — opens the SSH/remote setup pane next

☐ **RTL-SDR**
A plain RTL-SDR USB dongle via rtl_tcp — no SDRConnect involved

[Advanced connection settings \(SSH / default device / timing\)](#)

Connection Setup — SDRConnect Server mode

DARKSKY NEXUS w035

Should NEXUS start SDRConnect for you?

Only applies if SDRConnect isn't already open — if it's already running and connected, NEXUS will just use it.

☒ **No — I'll start it myself**
NEXUS just waits for SDRConnect to already be running, same as before

☐ **Yes — Headless**
No SDRConnect window, lowest overhead — but you can't adjust its BASE/REF sliders

☐ **Yes — Full GUI**
Opens SDRConnect's own window too, so BASE/REF/gain sliders stay reachable

APP PATH

[← Back](#)

Connection Setup — nRSP-ST / Local mode

Running everything on one computer (recommended / default)

The default setup — and the one to use unless you have a specific reason not to — is **NEXUS, SDRConnect, and (if you use FT8/WSPR) WSJT-X all running on the same Windows/macOS/Linux PC that your SDRplay receiver is physically plugged into.** This is what NEXUS assumes with no `--sdr` flag (it talks to SDRConnect on `127.0.0.1:5454`), and it's the only configuration where every feature works, since some integrations — notably FT8/WSPR decode display — read local files/processes on the same machine rather than over the network. The `--sdr <IP>` remote option (see "Command-Line Options" below) and the SSH Launcher exist for advanced setups (e.g. a separate "RF box" headless machine next to the antenna, controlled from a laptop elsewhere) — they're optional, not required, and not the right starting point for a first install.

For an all-in-one-PC setup, suggested launch order: **NEXUS** → **SDRConnect** → **WSJT-X** (if using FT8/WSPR) → start the FT8/WSPR decoder panel in NEXUS last, after WSJT-X is already open. See section 6.6 in the User Manual and the Troubleshooting guide's FT8/WSPR entry for how NEXUS and WSJT-X actually communicate (it's two separate one-way channels, not a single link).

Requirements

To use NEXUS

- SDRConnect running locally (for SDRplay) **or** rtl_tcp running (for RTL-SDR)
- Packaged macOS builds require macOS 14.0 or later
- Google Chrome (recommended) or any modern browser

That's it — the installer above bundles everything else NEXUS itself needs. Python and its packages are only relevant if you're building NEXUS from source (see below).

Optional external tools (decoders)

Tool	Decoder	Install
fldigi	CW, RTTY, PSK31, NAVTEX	https://www.w1hkj.com
dump1090 / readsb	ADS-B	brew install readsb (macOS)
dumphfdl	HFDL	https://github.com/szpajder/dumphfdl
dumpvdl2	VDL2	https://github.com/szpajder/dumpvdl2
multimon-ng	POCSAG, FLEX, DTMF	brew install multimon-ng (macOS)
wsprd	WSPR	Part of WSJT-X install
DSD+	Digital Voice	https://www.dsdplus.com
codec2 (freedv_rx)	FreeDV HF Digital Voice	https://github.com/drowe67/codec2 (build from source)
BlackHole / VB-Audio	Virtual audio (fldigi)	https://existential.audio/blackhole
dab_radio_nexus	DAB / DAB+	Build from https://github.com/williamyang98/DAB-Radio (source build; see project build docs)
dream_nexus	DRM (Digital Radio Mondiale)	Build from the Dream DRM engine (source build; see the DRM/Dream build guide included with this release)
nrsc5_nexus	HD Radio (NRSC-5, North America only)	Build from https://github.com/theori-io/nrsc5 (source build; see the HD Radio build guide included with this release)

Note: DAB/DAB+, HD Radio, and DRM/DRM+ (the three rows above needing a source build) are the exception — their engines are bundled directly into the packaged macOS/Windows installers, so they work out of the box with no separate install. Building from source is only needed if you're running NEXUS from source yourself.

Note: the Numbers-Station / HF-Intel (Rivet) decoder needs no external tool — it's a clean-room NEXUS-native decoder with nothing to install.

Building & Running from Source (developers)

Requirements

Python 3.9 or later

Python packages (required)

```
numpy
websockets
```

Python packages (optional but recommended)

```
scipy      — better audio demodulation filters
sounddevice — audio output from RTL-SDR path
paramiko   — SSH Launcher (remote SDRConnect)
```

Install all at once:

```
pip install numpy websockets scipy sounddevice paramiko
```

On macOS with Homebrew Python:

```
pip3 install numpy websockets scipy sounddevice paramiko
```

Place these files in the same folder:

```
w035_NEXUS.py
DARKSKY_NEXUS_w035.html
eibi.csv          (auto-downloaded on first run if missing)
airports.csv      (auto-downloaded on first run if missing)
airport-frequencies.csv (auto-downloaded on first run if missing)
darksky_bookmarks.json (auto-created on first run)
```

Local SDRConnect (default):

```
python3 w035_NEXUS.py
```

Remote SDRConnect:

```
python3 w035_NEXUS.py --sdr 192.168.1.xx
```

RTL-SDR via rtl_tcp:

Start rtl_tcp first:

```
rtl_tcp -a 127.0.0.1
```

Then:

```
python3 w035_NEXUS.py --rtl 127.0.0.1
```

NEXUS will open Chrome automatically at <http://127.0.0.1:8888>. If Chrome is not found it falls back to your default browser.

The `build/` folder's `build_macOS.sh` and `build_Windows.bat` scripts are what produce the .dmg and installer .exe described in "Installing DARKSKY NEXUS" above, if you want to package your own build.

IQ Lite vs Full IQ (changed in w0.2.3)

Earlier builds defaulted SDRplay nRSP-ST/RSPdx devices to **IQ Lite** mode, on the assumption that it provided a lower-bandwidth raw IQ stream suitable for decoders. Direct testing against SDRplay's own reference client confirmed this was never the case: **IQ Lite and Compact modes never deliver raw IQ frames on the nRSP-ST** — they exist only for demodulated/decoder-rate audio streaming, not IQ. This was confirmed both empirically (packet capture) and directly by SDRplay support.

As of w0.2.3:

- **Full IQ is now the default stream mode** for SDRplay devices. Direct testing sustained 2 MSps Full IQ over Wi-Fi cleanly with zero dropped frames, so the earlier "bandwidth too limited for Full IQ" assumption no longer holds.
- The **IQ LITE+** decoder category has been removed from the Decoders dropdown. WEFAX (previously listed there) now appears under **FULL IQ**, alongside ACARS, POCSAG, and AIS — all of these genuinely require raw IQ and will not work in Compact mode.
- If you notice any IQ-dependent decoder or audio path behaving unexpectedly, confirm SDRConnect's stream mode is set to **Full IQ** (status bar, top of waterfall) — Compact mode never carries IQ, by design, not by bug.

First Use Walkthrough

1. Check connection status

The top-right corner shows connection status. Look for **SDRConnect** (green) when connected to an SDRplay receiver, or **RTL-SDR** when using rtl_tcp.

2. Set your frequency

Click the large VFO frequency display and type a frequency, or click on the waterfall to tune. The VFO shows the signal frequency; the LO line beneath it shows the hardware centre.

3. Choose a mode

The mode buttons (USB / LSB / AM / SAM / NFM / WFM / CW / AUTO) sit above the waterfall. Click to change.

4. Adjust the waterfall

- **FLOOR** — sets the noise floor (lower = more sensitive, more noise)
- **RANGE** — sets the dynamic range (how many dB are displayed)
- **ZOOM** — zooms the waterfall in/out
- **CTR** — recentres the visible span on your tuned VFO frequency (w0.2.6) — handy if the signal has drifted to the edge
- **SPEED** — waterfall scroll speed
- Drag the resize handle below the waterfall to give more space to the decoder panels
- Use the **A– / 100% / A+** control in the top bar (w0.2.6) if the whole UI is too small to read comfortably


4a. Sample rate / display span and antenna (SDRplay nRSP-ST / RSPdx)

The **SAMPLE RATE** control in the status bar opens a dropdown of available rates, and in Full IQ mode (the default — see above) this sets the actual hardware sample rate.

If your SDRplay device has multiple antenna ports (e.g. nRSP-ST/RSPdx Antenna A/B/C), an **ANTENNA** control appears next to GAIN in the status bar. Click it to switch input ports without leaving NEXUS. It only appears once SDRConnect reports available antennas for your connected device.

5. Explore decoders


Click **DECODERS** in the tab bar and select a decoder. The panel opens with three category tabs — COMPACT, FULL IQ, and EXTERNAL — click a tab to switch which grid of decoder cards is shown, then click a card to select that decoder. For fldigi-based decoders (CW, RTTY, PSK31, NAVTEX), choose **NEXUS** engine (internal) or **FLDIGI** engine (requires fldigi running with virtual audio).

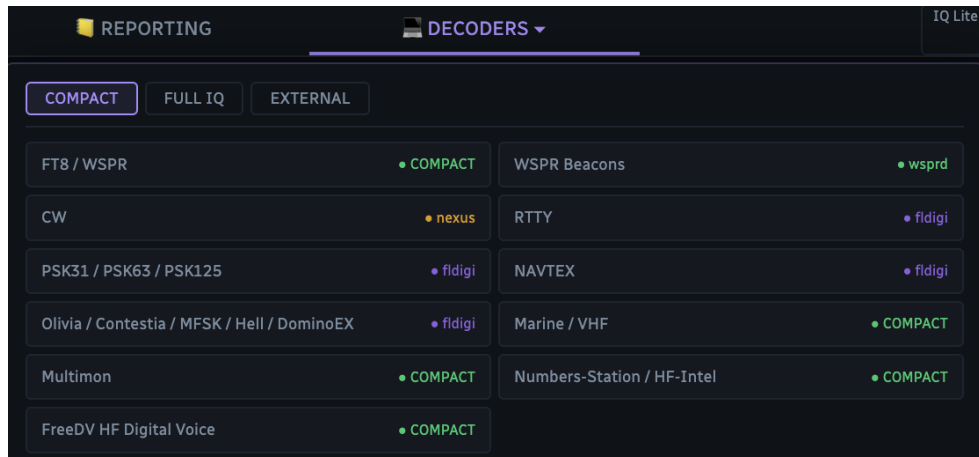

DECODERS panel — COMPACT category (audio-only decoders)



DECODERS panel — FULL IQ category (raw-IQ decoders)

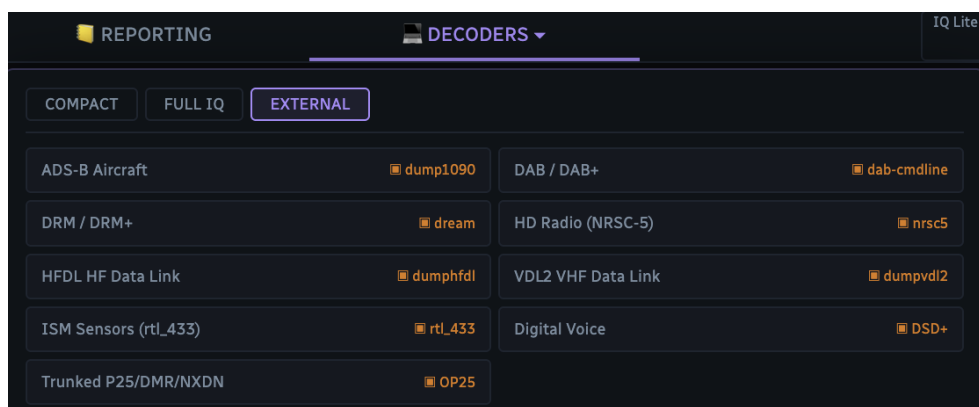

DECODERS panel — EXTERNAL category (external engine decoders)

Two COMPACT decoders worth a quick look:

- **Numbers-Station / HF-Intel (Rivet)** — tune to a DSC or Baudot numbers-station frequency (use the Quick Tune buttons in the tab), pick DSC or Baudot mode, click Start. No external tool needed.
- **FreeDV HF Digital Voice** — tune to an active FreeDV signal, pick the matching mode (1600/700C/700D/700E/2400A/2400B/800XA), click Start. Audio plays through your browser speakers. Requires `freedv_rx` (from `codec2`) on your PATH — see Requirements above.

6. HF Utility tab

The **HF UTILITY** tab shows space weather, band conditions, DX spots, and an EIBI signal lookup. Click any signal label on the waterfall to look it up automatically.

7. Import your own frequency lists

The **FREQ LISTS** tab is where your own frequency data lives, separate from the built-in EIBI/SigID database. Drop a CSV, TXT, or XLSX file onto the tab (or use its file picker) to import your own list — a monitoring log, a club's band plan, a utility-station list, anything with a frequency column.

- Accepted columns (case-insensitive, any order): a frequency column (header containing "freq", "khz", or "mhz"), plus optional name/station, mode, language, time/UTC, and site columns. SwSKEDS format (from Roger Need's shortwave schedule tool) is also recognised — its 'On'/'Off' time columns are parsed automatically.
- Frequencies are auto-detected as kHz or MHz based on header text and magnitude.
- On import you're asked for a list name and a region tag (e.g. "Colorado", or "Global" for worldwide lists) — this drives a colour badge showing whether the list matches your current location. Lists are flagged, never hidden, if they don't match.
- Imported lists are saved in your browser (localStorage) and persist between sessions.
- Entries show up alongside EIBI/SigID results in **SIG INTEL** and **SW SCHEDULE** lookups, tagged **CUSTOM**, whenever the tuned frequency is within 5 kHz of one of your entries.
- The tab itself gives you a searchable table of every entry across all lists, with click-to-tune, per-list visibility toggle, colour tag, and delete.
- Filters (w0.2.6)**: use **Near VFO** to show only entries within 5 kHz of your current tuned frequency (auto-refreshes as you tune), **On Now** to filter to entries currently on-air by UTC time, **All Languages** to filter by language, and **All Sources** to filter by list name. Note: On Now requires your list to have time data — if it does nothing, your list's time column wasn't detected on import (see the Troubleshooting guide).
- The Airband tab's **FM Nearby** panel also uses this data: if the live FM station lookup doesn't respond, it falls back to FM-band (87.5–108 MHz) entries from your imported lists instead of hanging on "Looking up...". If you see a message there suggesting you import a list, this is the tab to do it from.
- See a wrong frequency in the Airband tab's **Nearby Airports** list? Click the  next to it to correct it (or hide it) — your fix is remembered locally and re-applied automatically going forward.
- The Airband tab's **VOLMET** list now covers VHF stations across Europe/UK plus HF stations worldwide (Americas, Asia/Pacific) — VHF VOLMET is a European/UK-only service in real life, so HF is how the rest of the world gets it.
- To bookmark whatever frequency you're currently tuned to, click the  Bookmark button on the top command row — no need to hunt for a per-row button. A popup opens prefilled with the best match it can find (from your Frequency Lists, Nearby Airports data, or the SigID database); edit anything before saving.

8. Scan a band automatically

The **SCAN** tab steps the VFO across a frequency range and flags anything above an SNR threshold. Set From/To/Step/Dwell/SNR/Mode, press **Start**, and it'll pause on each hit so you can listen — click any hit in the log to tune to it. The spectrum and waterfall stay visible above the tab the whole time.

Ports Used

Port	Purpose
8888	HTTP — serves the NEXUS UI to your browser
8889	WebSocket — browser ↔ Python bridge
5454	SDRConnect WebSocket (inbound from SDRConnect)
7362	fldigi XML-RPC (outbound to fldigi)
4532	Hamlib NET rigctl (WSJT-X / fldigi CAT)
8080 / 8754	dump1090-fa / readsb ADS-B JSON feed (aircraft.json , tries 8080 then 8754)
30003	dump1090 SBS BaseStation fallback (text, ADS-B)
5556	dumphfdl JSON output
5557	dumpvdl2 JSON output

All ports are localhost only by default.

Command-Line Options

Only needed for a remote SDRConnect server or a non-default rtl_tcp host — the default install (NEXUS and SDRConnect on the same machine) needs none of these. If you're running from source:

```
python3 w035_NEXUS.py [options]

--sdr HOST[:PORT]  SDRConnect WebSocket host (default: 127.0.0.1:5454)
--rtl HOST[:PORT] rtl_tcp host (default: 127.0.0.1:1234)
```

Quick Tips

- **Shift+Scroll** on the waterfall adjusts the noise floor
- **Ctrl+Scroll** adjusts zoom
- **Right-click** the waterfall or spectrum to save a bookmark; click a bookmark label on the spectrum to tune to it
- **Drag the resize handle** between waterfall and panels to resize
- Press **F5** (or Cmd+Shift+R on macOS) to force-reload if UI looks stale after an update
- EIBI schedule is auto-downloaded on first run; click **Refresh EIBI** in SIG INTEL to update
- SDRplay devices default to **Full IQ** stream mode (changed in w0.2.3) — IQ Lite/Compact never carry raw IQ, by design
- Decoder categories in the **DECODERS** dropdown are collapsible — click a category header to expand/collapse it
- The **ANTENNA** control (status bar) only appears for devices with multiple antenna ports and switchable inputs reported by SDRConnect
- **Text too small?** Use the **A– / 100% / A+** UI size control in the top bar (added in w0.2.6) to scale the whole app from 80% up to 160%. Your setting is remembered across launches. (Browser zoom — Ctrl/Cmd + Plus/Minus — still works too, but the in-app control is the recommended way now.)
- **Signal stuck at the left/right edge of the waterfall?** Click **CTR** next to the ZOOM controls (added in w0.2.6) to recentre the visible span on your tuned frequency — works at any zoom level and doesn't retune the radio.
- **Freq Lists On Now filter does nothing?** Your list's time column wasn't detected on import (common with SwSKEDS format on older builds). Delete and re-import the list — the parser now correctly handles SwSKEDS 'On'/'Off' time columns.
- **Bookmark popup closed when you were typing in it?** Fixed in w0.2.6 — keyboard shortcuts are now suppressed while any input field is focused. Enter saves the bookmark; Escape cancels.
- **Want to decode FT8/FT4 without installing WSJT-X?** New in w030 — switch **FT8 SOURCE** to **INTERNAL** on the FT8/WSPR tab. It's a native in-browser decoder; click ► **Start** and you're done, no other setup. See the User Manual section 6.6 for details, including the propagation map's band-colour markers, multi-band persistence, and map style picker.
- **Want your FT8/WSPR/CW spots on PSK Reporter?** New in w031 — set your callsign and grid locator in the HF Utility tab's location bar and turn on reporting. Spots upload automatically in the background as your decoders find them; no separate program to run. See the User Manual's PSK Reporter section for details.
- **Want to receive weather-fax-style images off the air?** New in w033 (SSTV) — tune to an SSTV transmission, open the SSTV tab, and the image builds line-by-line as it's decoded. No external program needed.
- **Want to see nearby TPMS/weather-station/smart-meter ISM sensors?** New in w033 (rtl_433) — open the rtl_433 tab from the DECODERS dropdown for a live table of readings as they're received.

- **DECODERS dropdown looks different?** Redesigned in w033 to match the BANDS dropdown — pick a category tab (Compact / Full IQ / External), then click a decoder's button to open its tab, same as picking a band.
- **Want to keep a logbook?** New in w033 — the  **REPORTING** tab is a general SWL logbook, not just FT8/ham QSOs. Press **Ctrl+N** anywhere to log a new entry, or click  **Populate from FT8** to pull in FT8 decodes automatically (with country, band, distance, and bearing worked out for you). Export to ADIF or CSV any time. See User Manual Section 9a for the full feature list.
- **Want to decode DRM/DRM+ digital shortwave and FM broadcasts?** New in w035 — open the DRM tab from the DECODERS dropdown, pick a station from the quick-tune card grid (or tune manually), and click ► Start. Full IQ mode is required, same as DAB; sample rate, modulation, and bandwidth are all auto-set, nothing to configure in SDRConnect. See User Manual Section 6.19 for details.
- **Want to decode HD Radio (NRSC-5) hybrid digital AM/FM broadcasts?** New in w035 — open the HD Radio tab from the DECODERS dropdown, pick FM or AM mode, and click ► Start. Full IQ mode is required, same as DAB and DRM; sample rate is auto-set, nothing to configure in SDRConnect. HD Radio is a North America-only broadcast standard — there is no HD Radio service in the UK or Europe. See User Manual Section 6.20 for details.