

TR1863/TR1865

Universal Asynchronous Receiver/Transmitter (UART)

FINAL

TR1863/TR1865

FEATURES

- SINGLE POWER SUPPLY — +5VDC
- D.C. TO 1 MHZ (64 KB) (STANDARD PART) TR1863/5
- FULL DUPLEX OR HALF DUPLEX OPERATION
- AUTOMATIC INTERNAL SYNCHRONIZATION OF DATA AND CLOCK
- AUTOMATIC START BIT GENERATION
- EXTERNALLY SELECTABLE
 - Word Length
 - Baud Rate
 - Even/Odd Parity (Receiver/Verification — Transmitter/Generation)
 - Parity Inhibit
 - One, One and One-Half, or Two Stop Bit Generation (1½ at 5 Bit Level)
- AUTOMATIC DATA RECEIVED/TRANSMITTED STATUS GENERATION
 - Transmission Complete
 - Buffer Register Transfer Complete
 - Received Data Available
 - Parity Error
 - Framing Error
 - Overrun Error
- BUFFERED RECEIVER AND TRANSMITTER REGISTERS
- THREE-STATE OUTPUTS
 - Receiver Register Outputs
 - Status Flags
- TTL COMPATIBLE
- TR1865 HAS PULL-UP RESISTORS ON ALL INPUTS


DESCRIPTION

The Universal Asynchronous Receiver/Transmitter (UART) is a general purpose, programmable or hardwired MOS/LSI device. The UART is used to convert parallel data to a serial data format on the transmit side, and converts a serial data format to parallel data on the receive side.

The serial format in order of transmission and reception is a start bit, followed by five to eight data bits, a parity bit (if selected) and one, one and one-half, or two stop bits.

Three types of error conditions are available on each received character: parity error, framing error (no valid stop bit) and overrun error.

The transmitter and receiver operate on external 16X clocks, where 16 clock times are equal to one bit

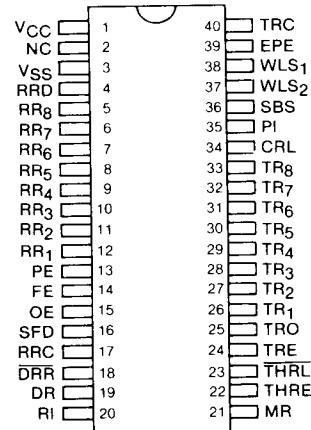

PIN DESIGNATION

APPLICATIONS

- PERIPHERALS
- TERMINALS
- MINI COMPUTERS
- FACSIMILE TRANSMISSION
- MODEMS
- CONCENTRATORS
- ASYNCHRONOUS DATA MULTIPLEXERS
- CARD AND TAPE READERS
- PRINTERS
- DATA SETS
- CONTROLLERS
- KEYBOARD ENCODERS
- REMOTE DATA ACQUISITION SYSTEMS
- ASYNCHRONOUS DATA CASSETTES

time. The receiver clock is also used to sample in the center of the serial data bits to allow for line distortion.

Both transmitter and receiver are double buffered allowing a one character time maximum between a data read or write. Independent handshake lines for receiver and transmitter are also included. All inputs and outputs are TTL compatible with three-state outputs available on the receiver, and error flags for bussing multiple devices.

PIN DESCRIPTION


| PIN NUMBER | SIGNAL MNEMONIC | SIGNAL NAME | FUNCTION |
|------------|----------------------------------|--------------------------------|---|
| 1 | VCC | POWER SUPPLY | + 5 volts supply |
| 2 | NC | NC | No Internal Connection |
| 3 | VSS | GROUND | Ground = 0V |
| 4 | RRD | RECEIVER REGISTER DISCONNECT | A high level input voltage, V_{IH} , applied to this line disconnects the RECEIVER HOLDING REGISTER outputs from the RR _{1,8} data outputs (pins 5-12). |
| 5-12 | RR ₈ -RR ₁ | RECEIVER HOLDING REGISTER DATA | The parallel contents of the RECEIVER HOLDING REGISTER appear on these lines if a low-level input voltage, V_{IL} , is applied to RRD. For character formats of fewer than eight bits received characters are right-justified with RR ₁ (pin 12) as the least significant bit and the truncated bits are forced to a low level output voltage, V_{OL} . |
| 13 | PE | PARITY ERROR | A high level output voltage, V_{OH} , on this line indicates that the received parity differ from that which is programmed by the EVEN PARITY ENABLE (pin 39) and the PARITY INHIBIT (pin 35) control lines. This output is updated each time a character is transferred to the RECEIVER HOLDING REGISTER. PE lines from a number of arrays can be bussed together since an output disconnect capability is provided by Status Flag Disconnect line (pin 16). |
| 14 | FE | FRAMING ERROR | A high-level output voltage, V_{OH} , on this line indicates that the received character has no valid stop bit, i.e., the bit (if programmed) is not a high level voltage. This output is updated each time a character is transferred to the Receiver Holding Register, FE lines from a number of arrays can be bussed together since an output disconnect capability is provided by the Status Flag Disconnect line (pin 16). |
| 15 | OE | OVERRUN ERROR | A high-level output voltage, V_{OH} , on this line indicates that the Data Received Flag (pin 19) was not reset before the next character was transferred to the Receiver Holding Register. OE lines from a number of arrays can be bussed together since an output disconnect capability is provided by the Status Flag Disconnect line (pin 16). |
| 16 | SFD | STATUS FLAGS DISCONNECT | A high-level input voltage, V_{IH} , applied to this pin disconnects the PE, FE, OE, DR and THRE allowing them to be buss connected. |
| 17 | RRC | RECEIVER REGISTER CLOCK | The receiver clock frequency is sixteen (16) times the desired receiver shift rate. |
| 18 | \overline{DRR} | <u>DATA RECEIVED RESET</u> | A low-level input voltage, V_{IL} , applied to this line resets the DR line. |
| 19 | DR | DATA RECEIVED | A high-level output voltage, V_{OH} , indicates that an entire character has been received and transferred to the RECEIVER HOLDING REGISTER. |

PIN DESCRIPTION


| PIN NUMBER | SIGNAL MNEMONIC | SIGNAL NAME | FUNCTION |
|---------------|----------------------------------|--|---|
| 20 | RI | RECEIVER INPUT | Serial input data. A high-level input voltage, V_{IH} , must be present when data is not being received. |
| 21 | MR | MASTER RESET | This line is strobed to a high-level input voltage, V_{IH} , to clear the logic. It resets the TRANSMITTER and RECEIVER HOLDING REGISTERS, the TRANSMITTER REGISTER, FE, OE, PE, DR and sets TRO, THRE, and TRE to a high-level output voltage, V_{OH} . |
| 22 | THRE | TRANSMITTER HOLDING REGISTER EMPTY | A high-level output voltage, V_{OH} , on this line indicates the TRANSMITTER HOLDING REGISTER has transferred its contents to the TRANSMITTER REGISTER and may be loaded with a new character. |
| 23 | THRL | TRANSMITTER HOLDING REGISTER LOAD | A low-level input voltage, V_{IL} , applied to this line enters a character into the TRANSMITTER HOLDING REGISTER. A transition from a low-level input voltage, V_{IL} , to a high-level input voltage, V_{IH} , transfers the character into the TRANSMITTER REGISTER if it is not in the process of transmitting a character. If a character is being transmitted, the transfer is delayed until its transmission is completed. Upon completion, the new character is automatically transferred simultaneously with the initiation of the serial transmission of the new character. |
| 24 | TRE | TRANSMITTER REGISTER EMPTY | A high-level output voltage, V_{OH} , on this line indicates that the TRANSMITTER REGISTER has completed serial transmission of a full character including STOP bit(s). It remains at this level until the start of transmission of the next character. |
| 25 | TRO | TRANSMITTER REGISTER OUTPUT | The contents of the TRANSMITTER REGISTER (START bit, DATA bits, PARITY bit, and STOP bits) are serially shifted out on this line. When no data is being transmitted, this line will remain at a high-level output voltage, V_{OH} . Start of transmission is defined as the transition of the START bit from a high-level output voltage V_{OH} , to a low-level output voltage V_{OL} . |
| 26-33 | TR ₁ -TR ₈ | TRANSMITTER REGISTER DATA INPUTS | The character to be transmitted is loaded into the TRANSMITTER HOLDING REGISTER on these lines with the THRL Strobe. If a character of less than 8 bits has been selected (by WLS ₁ and WLS ₂), the character is right justified to the least significant bit, TR ₁ , and the excess bits are disregarded. A high-level input voltage, V_{IH} , will cause a high-level output voltage, V_{OH} , to be transmitted. |
| 34 | CRL | CONTROL REGISTER LOAD | A high-level input voltage, V_{IH} , on this line loads the CONTROL REGISTER with the control bits (WLS ₁ , WLS ₂ , EPE, PI, SBS). This line may be strobed or hard wired to a high-level input voltage, V_{IH} . |


PIN DESCRIPTION

| PIN DESCRIPTION | | | | | | | | | | | | | | | | | | |
|------------------------|------------------------------------|----------------------|---|------------------------|------------------------|--------------------|----------|----------|--------|----------|----------|--------|----------|----------|--------|----------|----------|--------|
| PIN NUMBER | SIGNAL MNEMONIC | SIGNAL NAME | FUNCTION | | | | | | | | | | | | | | | |
| 35 | PI | PARITY INHIBIT | A high-level input voltage, V_{IH} , on this line inhibits the parity generation and verification circuits and will clamp the PE output (pin 13) to V_{OL} . If parity is inhibited, the STOP bit(s) will immediately follow the last data bit of transmission. | | | | | | | | | | | | | | | |
| 36 | SBS | STOP BIT(S) SELECT | This line selects the number of STOP bits to be transmitted after the parity bit. A high-level input voltage V_{IH} , on this line selects two STOP bits, and a low-level input voltage, V_{IL} , selects a single STOP bit. The TR1863 and TR1865 generate 1½ stop bits when word length is 5 bits and SBS is High V_{IH} . | | | | | | | | | | | | | | | |
| 37-38 | WLS ₂ -WLS ₁ | WORD LENGTH SELECT | These two lines select the character length (exclusive of parity) as follows: <table><tr><td><u>WLS₂</u></td><td><u>WLS₁</u></td><td><u>Word Length</u></td></tr><tr><td>V_{IL}</td><td>V_{IL}</td><td>5 bits</td></tr><tr><td>V_{IL}</td><td>V_{IH}</td><td>6 bits</td></tr><tr><td>V_{IH}</td><td>V_{IL}</td><td>7 bits</td></tr><tr><td>V_{IH}</td><td>V_{IH}</td><td>8 bits</td></tr></table> | <u>WLS₂</u> | <u>WLS₁</u> | <u>Word Length</u> | V_{IL} | V_{IL} | 5 bits | V_{IL} | V_{IH} | 6 bits | V_{IH} | V_{IL} | 7 bits | V_{IH} | V_{IH} | 8 bits |
| <u>WLS₂</u> | <u>WLS₁</u> | <u>Word Length</u> | | | | | | | | | | | | | | | | |
| V_{IL} | V_{IL} | 5 bits | | | | | | | | | | | | | | | | |
| V_{IL} | V_{IH} | 6 bits | | | | | | | | | | | | | | | | |
| V_{IH} | V_{IL} | 7 bits | | | | | | | | | | | | | | | | |
| V_{IH} | V_{IH} | 8 bits | | | | | | | | | | | | | | | | |
| 39 | EPE | EVEN PARITY ENABLE | This line determines whether even or odd PARITY is to be generated by the transmitter and checked by the receiver. A high-level input voltage, V_{IH} , selects even PARITY and a low-level input voltage, V_{IL} , selects odd PARITY. | | | | | | | | | | | | | | | |
| 40 | TRC | TRANSMITTER REGISTER | The transmitter clock frequency is sixteen (16) times the desired transmitter shift rate. | | | | | | | | | | | | | | | |

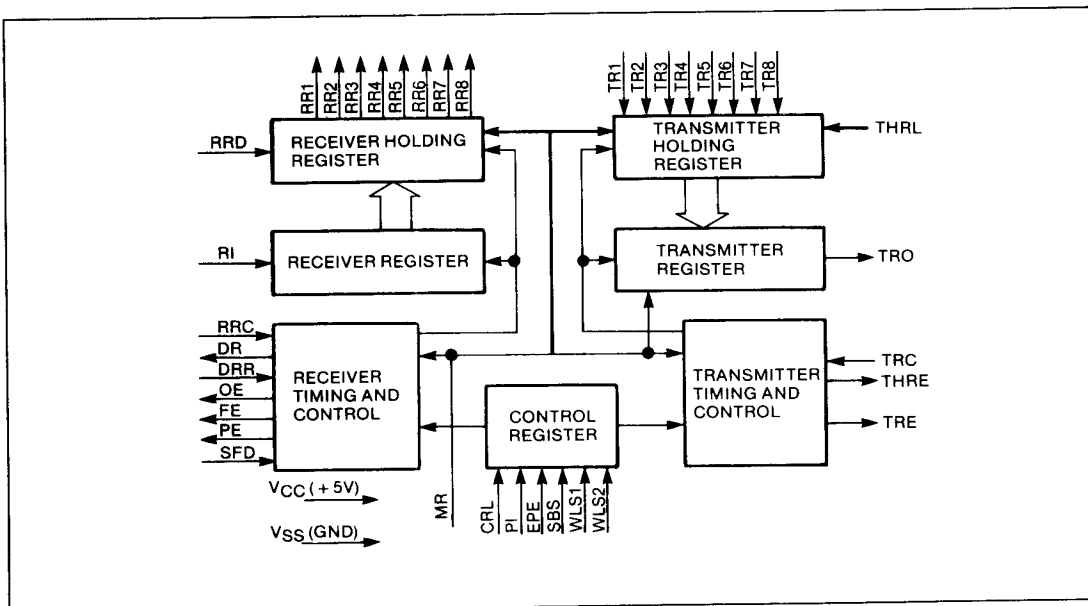


TR1863/TR1865 BLOCK DIAGRAM

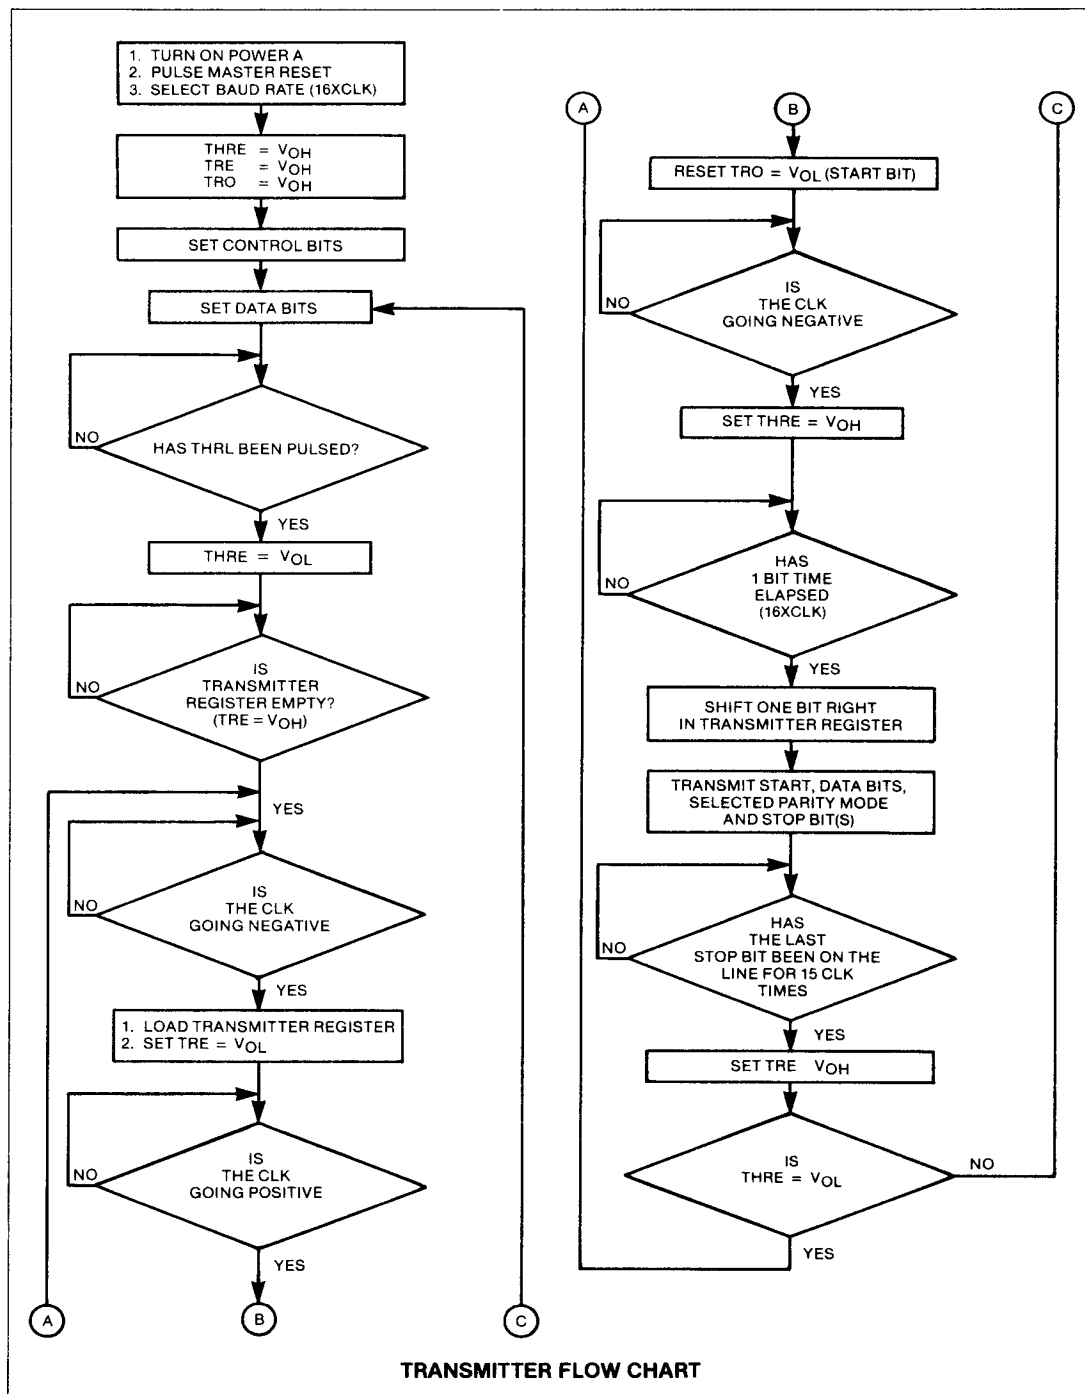

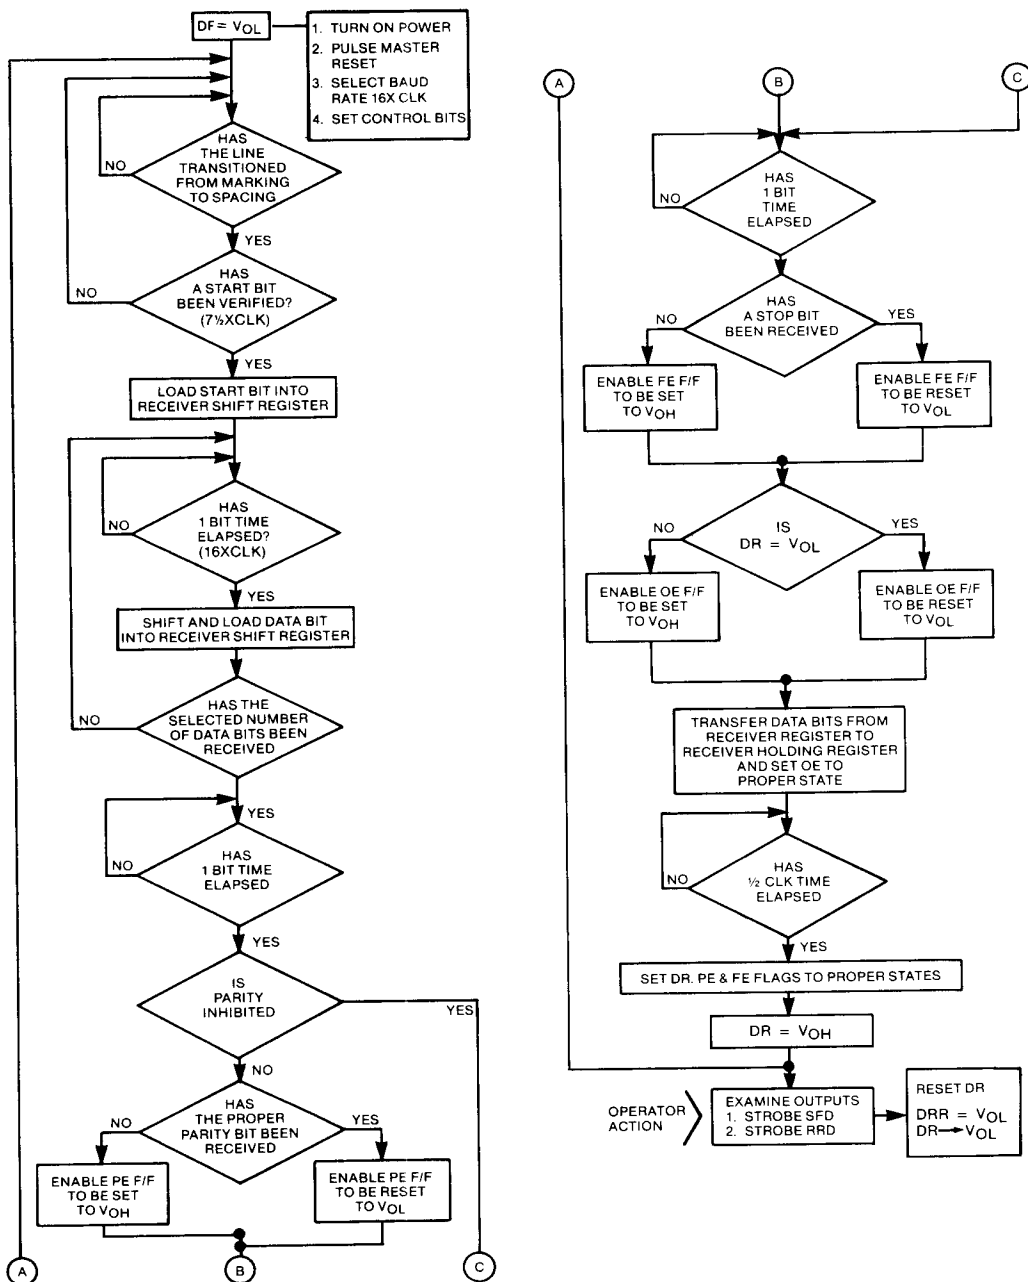

RECEIVER FLOW CHART

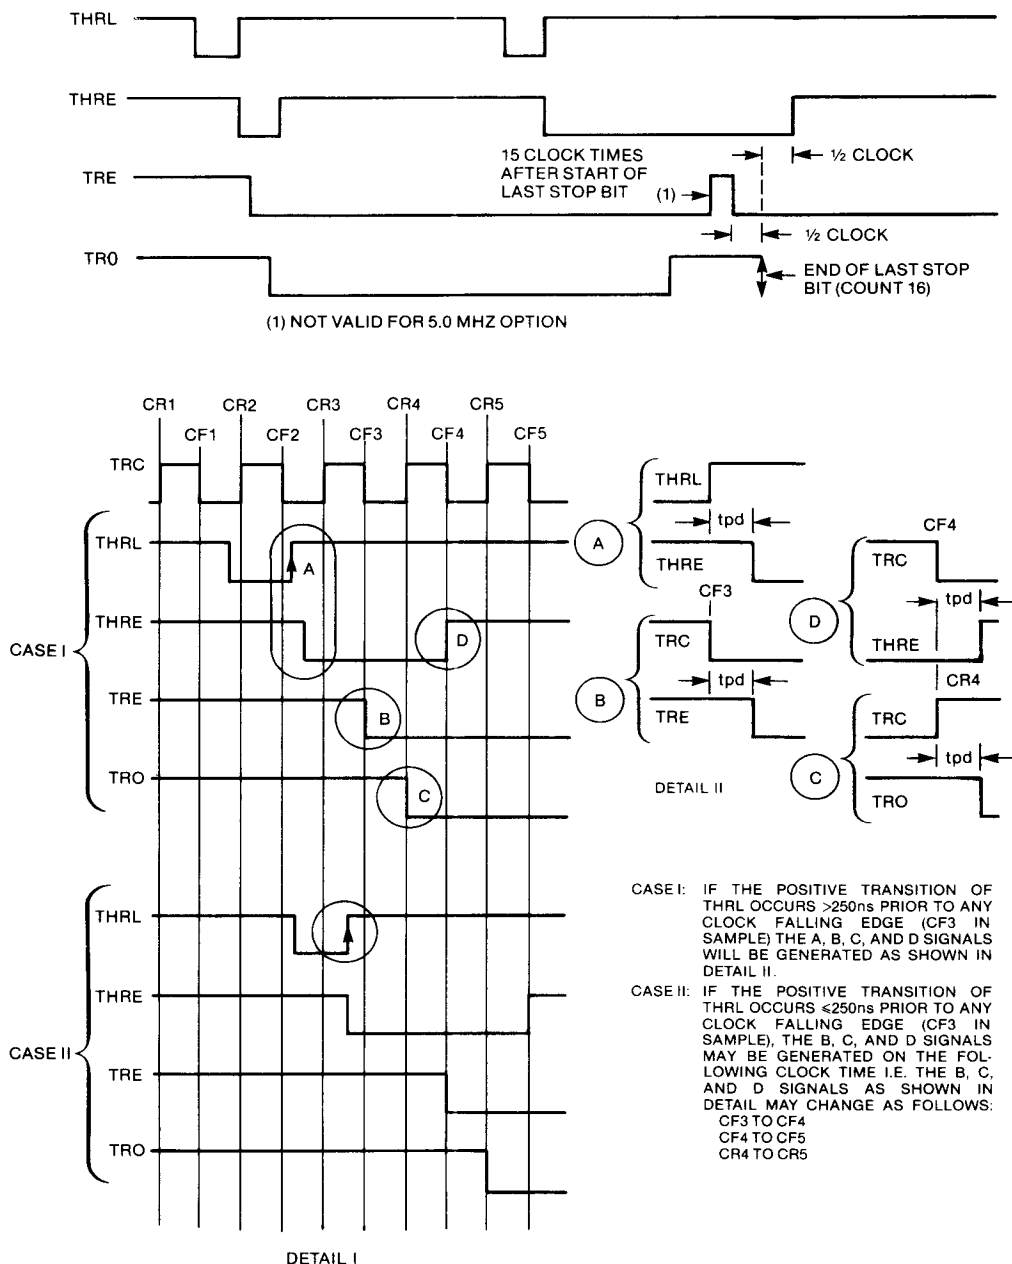

TRANSMITTER TIMING

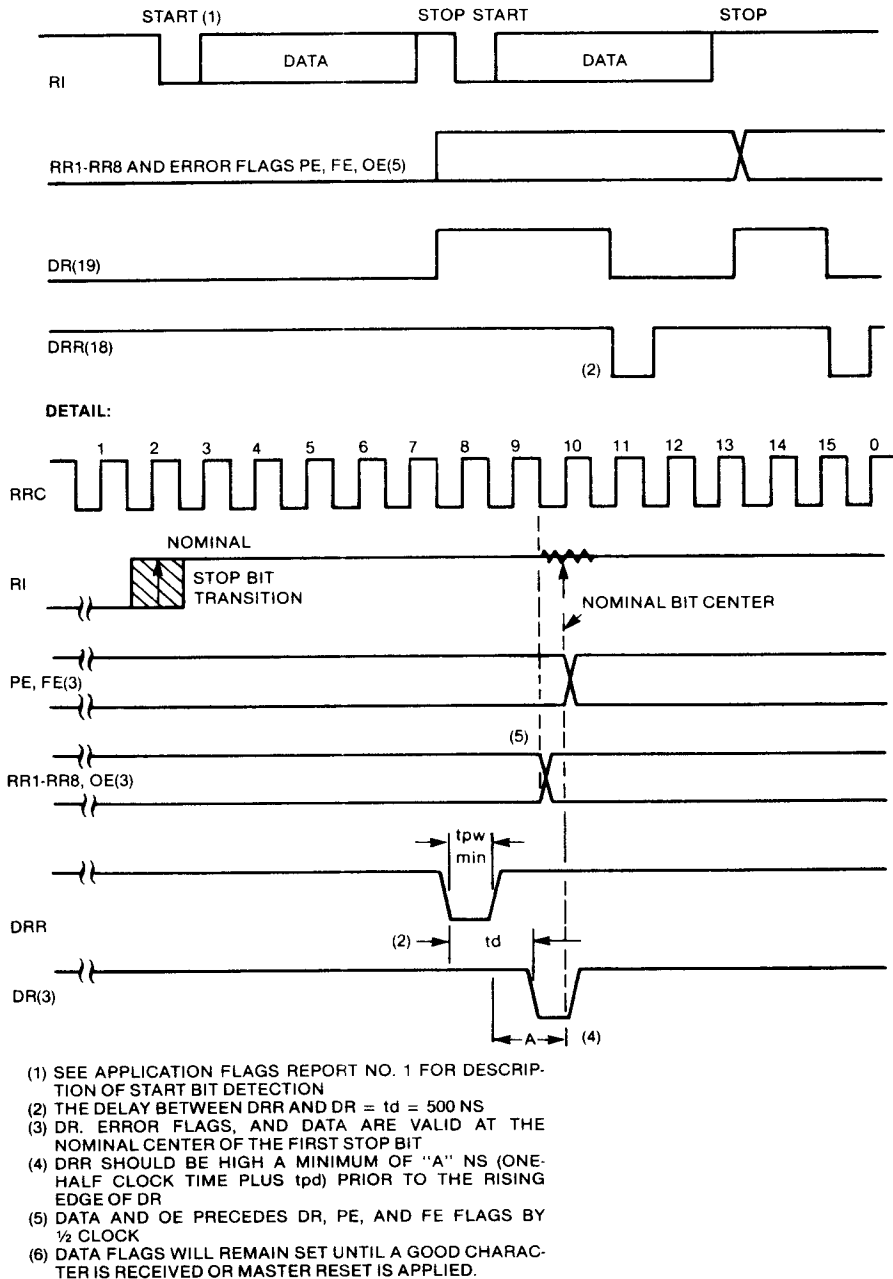


FIGURE 1. RECEIVER TIMING

ABSOLUTE MAXIMUM RATINGS

NOTE: These voltages are measured with respect to GND

Storage Temperature

Plastic -55°C to +125°C
 Ceramic -65°C to +150°C
 V_{CC} Supply Voltage -0.3V to +7.0V
 Input Voltage at any pin -0.3V to +7.0V
 Operating Free-Air Temperature
 T_A Range 0°C to 70°C
 Lead Temperature (Soldering, 10 sec.) 300°C

ELECTRICAL CHARACTERISTICS

(V_{CC} = 5V ± 5%, V_{SS} = 0V)

| SYMBOL | PARAMETER | TR1863/5 | | CONDITIONS |
|-----------------|--|----------|--------|---|
| | | MIN | MAX | |
| I _{CC} | Supply Current | | 35ma | V _{CC} = 5.25V |
| V _{IH} | LOGIC LEVELS | | | |
| V _{IH} | Logic High | 2.4V | | |
| V _{IL} | Logic Low | | 0.6V | V _{CC} = 4.75V |
| V _{OH} | OUTPUT LOGIC LEVELS | | | |
| V _{OH} | Logic High | 2.4V | | V _{CC} = 4.75V, I _{OH} = 100 μa |
| V _{OL} | Logic Low | | 0.4V | V _{CC} = 5.25V, I _{OL} = 1.6 ma |
| I _{OC} | Output Leakage (High Impedance State) | | ± 10μa | V _{OUT} = 0V, V _{OUT} = 5V SFD = RRD = V _{IH} |
| I _{IL} | Low Level Input Current | 100μa | 1.6ma | V _{IN} = 0.4V TR 1865 only |
| I _{IH} | High Level Input Current | | 10μa | V _{IN} = V _{IH} , TR 1863 only |
| | | | - 10μa | V _{IN} = V _{IH} , TR 1863 only |

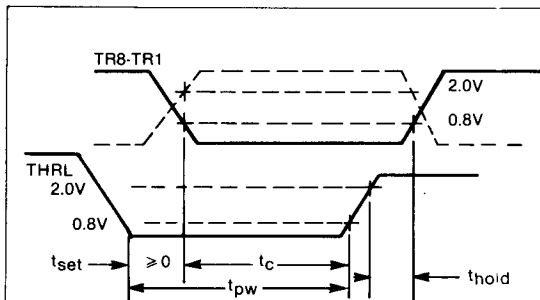


FIGURE 2. DATA INPUT LOAD CYCLE



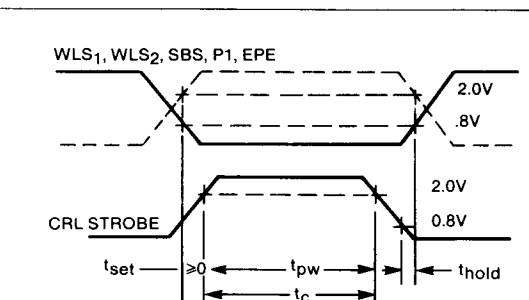


FIGURE 3. CONTROL REGISTER LOAD CYCLE

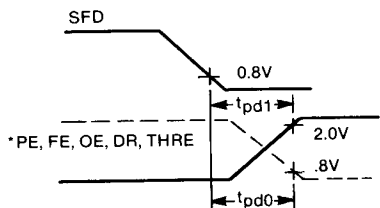

*OUTPUTS PE, FE, OE, DR, THRE ARE DISCONNECTED AT TRANSITION OF SFD FROM 0.8V TO 2.0V.

FIGURE 4. STATUS FLAG OUTPUT DELAYS



*RR1-RR3, ARE DISCONNECTED AT TRANSITION OF RRD FROM 0.8V TO 2.0V.

FIGURE 5. DATA OUTPUT DELAYS

SWITCHING CHARACTERISTICS

(See FIGURE 1-5)

| SYMBOL | PARAMETER | MIN | MAX | CONDITIONS |
|-------------------|---------------------------|--------|---------|---|
| f _{clk} | Clock Frequency | | | VCC = 4.75V |
| | TR1863-00 | DC | 1.0 MHz | |
| | TR1863-02 | DC | 2.5 MHz | |
| | TR1863-04 | DC | 3.5 MHz | |
| | TR1865-00 | DC | 1.0 MHz | with internal pull-ups on all inputs |
| | TR1865-02 | DC | 2.5 MHz | with internal pull-ups on all inputs |
| | TR1865-04 | DC | 3.5 MHz | with internal pull-ups on all inputs |
| t _{pw} | Pulse Widths | | | |
| | CRL (Fig. 3) | 200 ns | | |
| | THRL (Fig. 2) | 200 ns | | |
| | DRR (Fig. 1) | 200 ns | | |
| | MR | 500 ns | | |
| t _c | Coincidence Time | 200 ns | | |
| t _{hold} | Hold Time (Fig. 2, 3) | 20 ns | | |
| t _{set} | Set Time (Fig. 2, 3) | 0 | | |
| | OUTPUT PROPAGATION DELAYS | | | |
| t _{pd0} | To Low State (Fig. 4, 5) | | 250 ns | |
| t _{pd1} | To High State (Fig. 4, 5) | | 250 ns | C _L = 20 pf, plus one TTL load |
| | CAPACITANCE | | | |
| c _{in} | Inputs | | 20 pf | f = 1 MHz, V _{IN} = 5V |
| c _o | Outputs | | 20 pf | f = 1 MHz, V _{IN} = 5V |

See page 383 for ordering information.

Information furnished by Western Digital Corporation is believed to be accurate and reliable. However, no responsibility is assumed by Western Digital Corporation for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Western Digital Corporation. Western Digital Corporation reserves the right to change specifications at anytime without notice.