

USB-C power only: the phone supplies 5 V because of the 5.1k pull-downs on CC1/CC2. D+/D- are not on this receptacle.
PY32 runs from 5 V directly (VCC 1.7–5.5 V, abs max 6.25 V). R3/C2 filter VBUS spikes.

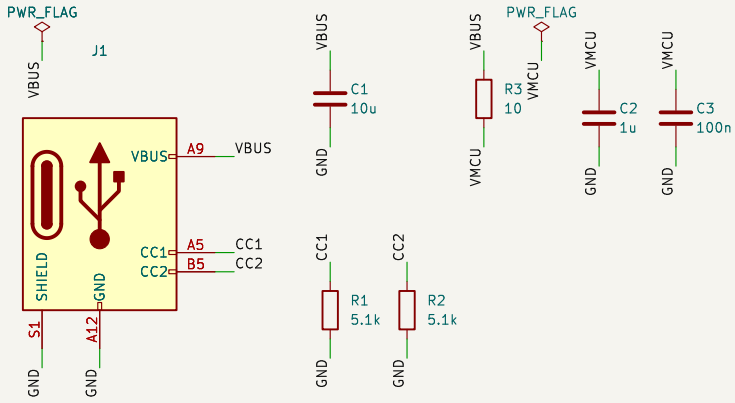



TYPE-C 6P (power only)


White reverse-mount LED shines through a hole in the board (camera mode). About 12 mA from PA5.




Click: S8050 switches the passive buzzer from VBUS. D2 catches the coil kick.
R6 keeps the buzzer off while the MCU resets.

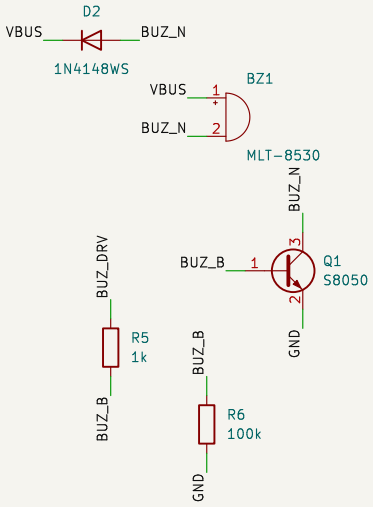


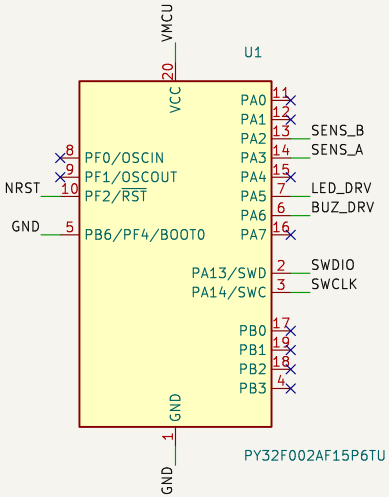





Two reverse-gullwing phototransistors look through holes in the board (display mode).
COMP2 compares SENS_A (PA3, +) with SENS_B (PA2, −). The ADC reads the same pins for dark/light.



Programming pads on the flat bottom side: VMCU, GND, SWDIO, SWCLK, NRST (pogo jig).

License: MIT (see repository LICENSE)
Generated by scripts/gen_sch.py from scripts/design.py
v1 proposal — not built or tested yet

Sheet: /
File: calibrator.kicad_sch

Title: AVsync calibrator

Size: A4	Date: 2026-11-08	**Rev: 0.1**
KiCad E.D.A. 9.0.9		Id: 1/1